

Paloalto-Networks

Exam Questions SD-WAN-Engineer

Palo Alto Networks SD-WAN Engineer



NEW QUESTION 1

A network engineer is able to ping and traceroute from SD-WAN branch IP 192.168.1.123 to servers in primary data center – DC1, but is unable to ping or traceroute to a server 10.2.2.22 in the newly configured secondary data center, DC2.

The DC2 ION device is advertising the branch IP subnet 192.168.1.0/24 to the DC2 core via eBGP Core Peer. The DC2 data center site has site prefix 10.2.2.0/23 configured.

Which configuration will resolve the issue in this scenario?

- A. The default 0.0.0.0/0 static route to the DC2 ION pointing to the DC2 next hop.
- B. Reconfigure eBGP Core Peer to iBGP Core Peer.
- C. Reconfigure eBGP Core Peer as Edge Peer type.
- D. Remove site prefix 10.2.2.0/23 from DC2 site configuration.

Answer: A

NEW QUESTION 2

A network administrator is viewing the Flow Browser to investigate a report that a specific user cannot access an internal web server. The flow entry for this traffic shows the "Flow State" as "INIT" and it remains in that state until it times out.

What does the "INIT" state indicate about the traffic flow?

- A. The TCP 3-way handshake was completed successfully, and data is being transferred.
- B. The ION device received the SYN packet from the client but never saw a SYN-ACK response from the server.
- C. The flow was denied by a Zone-Based Firewall policy on the ION.
- D. The traffic is being buffered while the ION waits for a dynamic VPN tunnel to establish.

Answer: B

NEW QUESTION 3

A site has two internet circuits: Circuit A with 500 Mbps capacity and Circuit B with 100 Mbps capacity.

Which path policy configuration will ensure traffic is automatically shifted from a saturated circuit to the circuit with available bandwidth?

- A. Circuit A as an active, Circuit B as a backup
- B. Circuit B as an active, Circuit A as a backup
- C. Both circuits under active path
- D. Circuit B as an L3 failure path

Answer: C

NEW QUESTION 4

Network segmentation is required due to overlapping IP address space and M&A scenarios. Which Prisma SD-WAN feature will achieve the desired segmentation and end-to-end connectivity in this use case?

- A. Virtual Routing and Forwarding (VRF) profiles with proper site bindings to achieve desired isolation across the underlay
- B. Virtual Routing and Forwarding (VRF) profiles with proper site bindings to achieve desired isolation locally and across the secure fabric
- C. Multiple contexts with interface segmentation to achieve desired isolation across the underlay
- D. Multiple virtual routers with interface segmentation to achieve desired isolation across the secure fabric

Answer: B

NEW QUESTION 5

An ION 3000 device at a remote branch has suffered a critical hardware failure and must be replaced via the RMA process. The administrator has received the replacement unit.

What is the correct procedure to transfer the configuration and license from the defective unit to the replacement unit to ensure minimal downtime and retention of historical data?

- A. Manually configure the new device from scratch, then open a support ticket to transfer the license.
- B. Use the "Replace Device" workflow in the Prisma SD-WAN portal, which automatically transfers the configuration (Device Shell) and re-associates the site to the new serial number.
- C. Backup the configuration of the old device to a USB drive and restore it to the new device using the local console.
- D. Delete the old device from the portal, create a new site for the replacement device, and rebuild the policies manually.

Answer: B

NEW QUESTION 6

A customer wants to deploy Prisma SD-WAN ION devices at small home offices that use consumer-grade broadband routers. These routers typically use Symmetric NAT and do not allow static port forwarding.

Which standard mechanism does Prisma SD-WAN utilize to successfully establish direct Branch-to-Branch (Dynamic) VPN tunnels through these Symmetric NAT devices?

- A. UPnP (Universal Plug and Play)
- B. STUN (Session Traversal Utilities for NAT)
- C. Manual GRE Tunnels
- D. SSL VPN encapsulation

Answer: B

NEW QUESTION 7

A remote branch site is reporting intermittent connectivity to the Data Center. The administrator checks the System > Alarms page and sees a "VPN_DOWN" alarm for the tunnel to the DC. However, the internet circuit status is "Up".

Which specific log file or diagnostic tool in the Prisma SD-WAN portal would provide the IKE (Internet Key Exchange) error codes (e.g., "NO_PROPOSAL_CHOSEN" or "AUTH_FAILED") to pinpoint the cause of the tunnel failure?

- A. Flow Browser
- B. Event Logs > System
- C. Site Summary > Topology
- D. Link Quality Graphs

Answer: B

NEW QUESTION 8

Which specialized hardware feature is available on the ION 9000 series but NOT on the ION 3000 series, making it suitable for high-throughput Data Center deployments?

- A. Support for LTE/5G SIM cards
- B. Fail-to-Wire Bypass Pairs
- C. 10 Gigabit Ethernet (SFP+) ports
- D. PoE+ (Power over Ethernet) output ports

Answer: C

NEW QUESTION 9

A network operator receives a critical SITE_CONNECTIVITY_DOWN alarm for a branch site in the Prisma SD-WAN portal. What specific condition triggers this alarm type?

- A. The device has lost power and rebooted.
- B. One of the two internet circuits at the site has gone down.
- C. All Secure Fabric Links (VPNs) to all remote peers are down, isolating the site from the overlay.
- D. The site has exceeded its licensed bandwidth capacity.

Answer: C

NEW QUESTION 10

Which troubleshooting action should be taken when resources at one branch site can reach the internet but cannot be reached from the data center (DC)?

- A. Create static route with DC ION as a next hop.
- B. Ensure the LAN branch prefixes are set to ??global.??
- C. Set the site in a control mode.
- D. Admin up the Prisma SD-WAN DC endpoints.

Answer: B

NEW QUESTION 10

In a Data Center deployment, what is the key functional difference between configuring a BGP neighbor as a "Core Peer" versus an "Edge Peer"?


- A. A Core Peer is used for LAN-side routing to learn DC prefixes, while an Edge Peer is used for WAN-side routing to the Service Provider.
- B. A Core Peer automatically redistributes learned routes into the SD-WAN fabric, whereas an Edge Peer does not.
- C. A Core Peer supports eBGP only, while an Edge Peer supports iBGP only.
- D. A Core Peer is used for connecting to the internet, while an Edge Peer connects to the MPLS provider.

Answer: A

NEW QUESTION 12

When troubleshooting an issue at a site that is running on two cellular links from two carriers, the operations team shared some evidence shown in the graph below:

(SNR Graph showing Carrier-1 in blue dropping to near 0 dB and Carrier-2 in green staying relatively stable between 4.5 dB and 6.5 dB)

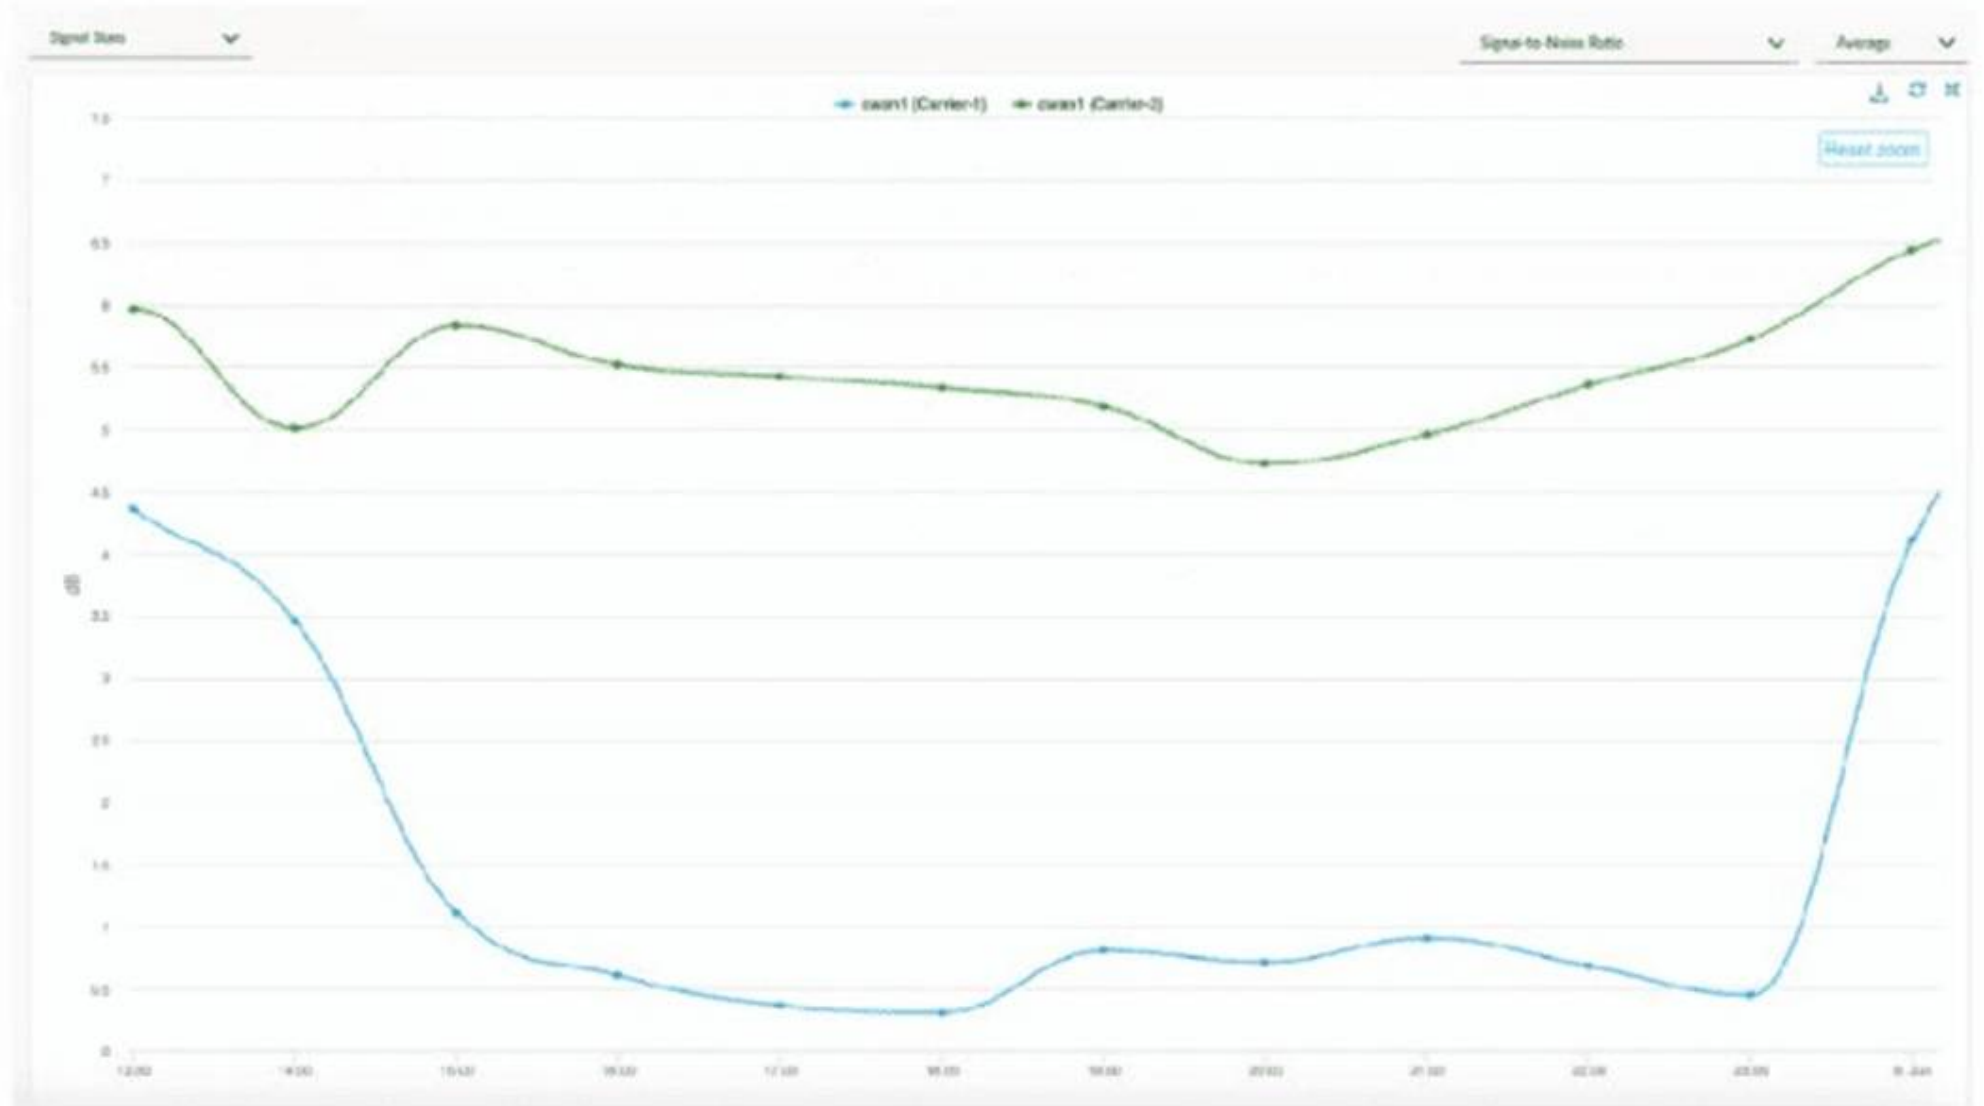

For the time duration shown in the graph, what are two inferences about the site??s traffic that can be made? (Choose two.)

- A. Using Carrier-1 as the WAN path may have experienced some performance degradation.
- B. Using Carrier-2 as the WAN path may have experienced some performance degradation.
- C. Using Carrier-2 as the WAN path may have switched over to Carrier-1.
- D. Using Carrier-1 as the WAN path may have switched over to Carrier-2.

Answer: AD

NEW QUESTION 13

An organization has provided the following technical requirements and details:

- ? High availability (HA) at all data center and branch locations
- ? Two geographically separate main data center locations
- ? One small data center location that contains local users and applications requiring policies
- ? 50 branch locations
- ? ISP capacities for all branch locations but no accurate measurement of the actual bandwidth consumption

Based on Palo Alto Networks best practices and recommendations, which two licensing options will meet the customer objectives? (Choose two.)

- A. Six data center subscriptions
- B. Aggregate bandwidth subscription
- C. Four data center subscriptions
- D. Branch subscription per site

Answer: AB

NEW QUESTION 15

When an ION device has been claimed, the cloud-based controller generates and communicates with the device by which method?

- A. Manufacturer Installed Certificate (MIC)
- B. Existing customer public key infrastructure (KPI)
- C. Self-signed certificate
- D. Customer Installed Certificate (CIC)

Answer: A

NEW QUESTION 18

A network engineer is troubleshooting a "Voice Quality" issue. They suspect that the DSCP markings are being stripped or altered by the ISP.

Which tool in the Prisma SD-WAN portal allows the engineer to capture live packets on the WAN interface and inspect the IP header ToS/DSCP field?

- A. Flow Browser
- B. Packet Capture (PCAP)
- C. Path Quality Monitor
- D. Event Logs

Answer: B

NEW QUESTION 21

An organization has created a custom internal application definition for "Inventory_App" on the Prisma SD-WAN controller based on its destination IP address and port (L3/L4 rule). The application server IP has just changed.

After updating the custom application definition on the controller, how is this change propagated to the branch ION devices?

- A. The administrator must manually "Push" the policy to all sites.
- B. The administrator must reboot the ION devices for the new object to load.
- C. The controller automatically pushes the updated Application Definition (App-Def) to all ION devices immediately.
- D. The change will only take effect after the daily "App-ID" scheduled update.

Answer: C

NEW QUESTION 24

In the Prisma SD-WAN portal, an administrator is viewing the "Media" analytics for a branch site to troubleshoot complaints about poor voice quality.

When calculating the Mean Opinion Score (MOS) for voice traffic, which two metrics does the system prioritize active monitoring for, even when no user voice traffic is present on the link? (Choose two.)

- A. Latency (One-Way)
- B. Jitter
- C. Throughput
- D. Packet Loss

Answer: BD

NEW QUESTION 29

A multinational company is deploying Prisma SD-WAN across North America, Europe, and Asia. The data centers in the North America region have served all regions, but regional policies are now being enforced that mandate each of the regions to build their own data centers and branch sites to only connect to their respective regional data centers.

How can this regionalization be achieved so that new or existing branch sites only build tunnels to the regional DC IONs?

- A. Create a new cluster for each regional DC ION and move the sites from the existing cluster to the new cluster.
- B. Disable the auto-tunnel feature globally on the Prisma SD-WAN portal and manually create all necessary tunnels exclusively between IONs within their designated regions.
- C. Remove the circuit labels and apply new circuit labels for in-region circuits only.
- D. Assign WAN interfaces to distinct Virtual Routing and Forwarding (VRF) instances for each region on the DC IONs, ensuring that branches only connect to the WAN interfaces/VRFs designated for their region.

Answer: A

NEW QUESTION 32

In the Prisma SD-WAN portal, the Application Health dashboard assigns a color-coded "Health Score" (Green, Yellow, Red) to applications.

Which three metrics are combined to calculate this composite AppX (Application Experience) score? (Choose three.)

- A. Transaction Failure Rate
- B. Network Transfer Time (NTT)
- C. Server Response Time (SRT)
- D. Bandwidth Utilization
- E. Jitter

Answer: ABC

NEW QUESTION 33

Which troubleshooting step should be taken when users at a branch site are experiencing a maximum throughput of 200 Mbps for Direct Internet Access (DIA) traffic on a 1 Gbps internet connection?

- A. Ensure QoS policy is applied to the site.
- B. Ensure the WAN interface is set to 1 Gbps or auto mode.
- C. Ensure performance policy is applied to the site.
- D. Ensure the circuit configuration at the site level is properly set.

Answer: D

NEW QUESTION 35

An administrator has configured a Path Policy for "ERP_Traffic". The policy allows two public internet links, "ISP-A" and "ISP-B", both marked as "Active". The Path Quality Profile (SLA) requires a latency of less than 150ms. Currently, both ISP-A and ISP-B have a latency of 40ms, well within the SLA.

How does the Prisma SD-WAN ION determine which link to use for a new flow of "ERP_Traffic" when both active paths meet the SLA requirements?

- A. It selects the path with the lowest numerical latency (e.g., if ISP-A drops to 39ms).
- B. It selects the path with the highest available bandwidth capacity.
- C. It duplicates the packets across both paths (Packet Duplication) to ensure delivery.
- D. It selects the path that appears first in the interface configuration list.

Answer: B

NEW QUESTION 36

Site templates are to be used for the large-scale deployment of 100 Prisma SD-WAN branch sites across different regions.

Which two statements align with the capabilities and best practices for Prisma SD-WAN site templates? (Choose two.)

- A. The use of Jinja conditional statements within a site template is not supported, thereby limiting dynamic customization options.
- B. Mandatory variables for any site template include the site name, ION software version, and at least one ION serial number /device name pair.
- C. Site templates offer the capability to pre-stage device configurations by creating a device shell.
- D. Once a site has been deployed using a template, its configuration can be updated or modified by applying an updated version of the template.

Answer: BC

NEW QUESTION 38

When using the CloudBlade to integrate Prisma SD-WAN with Prisma Access, how does the system ensure that the IPSec tunnels between the branch ION and the Prisma Access Security Processing Node (SPN) are kept alive during periods of no user traffic?

- A. The administrator must configure a continuous ping script on a branch PC.
- B. The CloudBlade automatically configures the ION to send Synthetic Probes (ICMP/HTTP) across the tunnel.
- C. The IPSec tunnel uses standard DPD (Dead Peer Detection) and the ION sends keepalives.
- D. Prisma Access initiates the connection to the branch every 60 seconds.

Answer: C

NEW QUESTION 39

1000 branches are to be deployed on Prisma SD-WAN with the following constraints:

- ? Devices will be shipped in batches directly to the site
 - ? Configuration Management Database (CMDB) has all the necessary details for a site deployment
 - ? Field tech will be responsible for rack, stack, and cabling of the IONs at each site
 - ? Field tech will need to spend minimum amount of time at each branch site to reduce the cost
 - ? The NOC operates in shifts and is responsible for remote cutover support
- Which method will achieve the mass deployment in shortest possible time?

- A. Connect the ION to the LAN switch to bring it online, configure the device using the legacy network, connect the ISP modem or cellular, and cutover the site once the ION is configured.
- B. Connect the device to the ISP modem or use cellular, use device shell to pre-create the configuration for a site, assign the device to the template when device is online, and connect the LAN switch to the ION.
- C. Use site templates and device shells to pre-create the configuration using CSV bulk upload, connect the device to the ISP modem or using cellular, assign the device to the template when device is online, and connect the LAN switch to the ION.
- D. Connect the device to the ISP modem or use cellular, use Prisma SD-WAN Software Development Kit (SDK) using API method for site deployment once the device is online, connect the LAN switch to the ION.

Answer: C

NEW QUESTION 43

In a data center (DC) with two ION devices, all of the remote branch Prisma SD-WAN VPNs are active only on DC ION-1. Why are no VPNs active on DC ION-2?

- A. The BGP core peer is down.
- B. The static route to core as a next hop is missing.
- C. The ION device is behind a NAT.
- D. The DC and branches are in a different domain.

Answer: A

NEW QUESTION 48


BGP core peers on data center IONs are learning only a default route from the core router. Which action will protect the SD-WAN network from getting isolated in the event of BGP misconfiguration on the core routers?

- A. Enable BGP Bidirectional Forwarding Detection (BFD) on the core peer sessions to rapidly detect BGP neighbor failures.
- B. Configure BGP max-prefix limits on the ION devices to prevent them from accepting too many routes from the core routers.
- C. Add a static default route with higher admin distance pointing to the core peer IPs.
- D. Implement BGP route filtering using prefix lists and route maps on the ION devices to only accept specific, known prefixes from the core.1

Answer: C

NEW QUESTION 52

Based on the HA topology image below, which two statements describe the end-state when power is removed from the ION 1200-S labeled ??Active??, assuming that the ION labeled ??Standby?? becomes the active ION? (Choose two.)

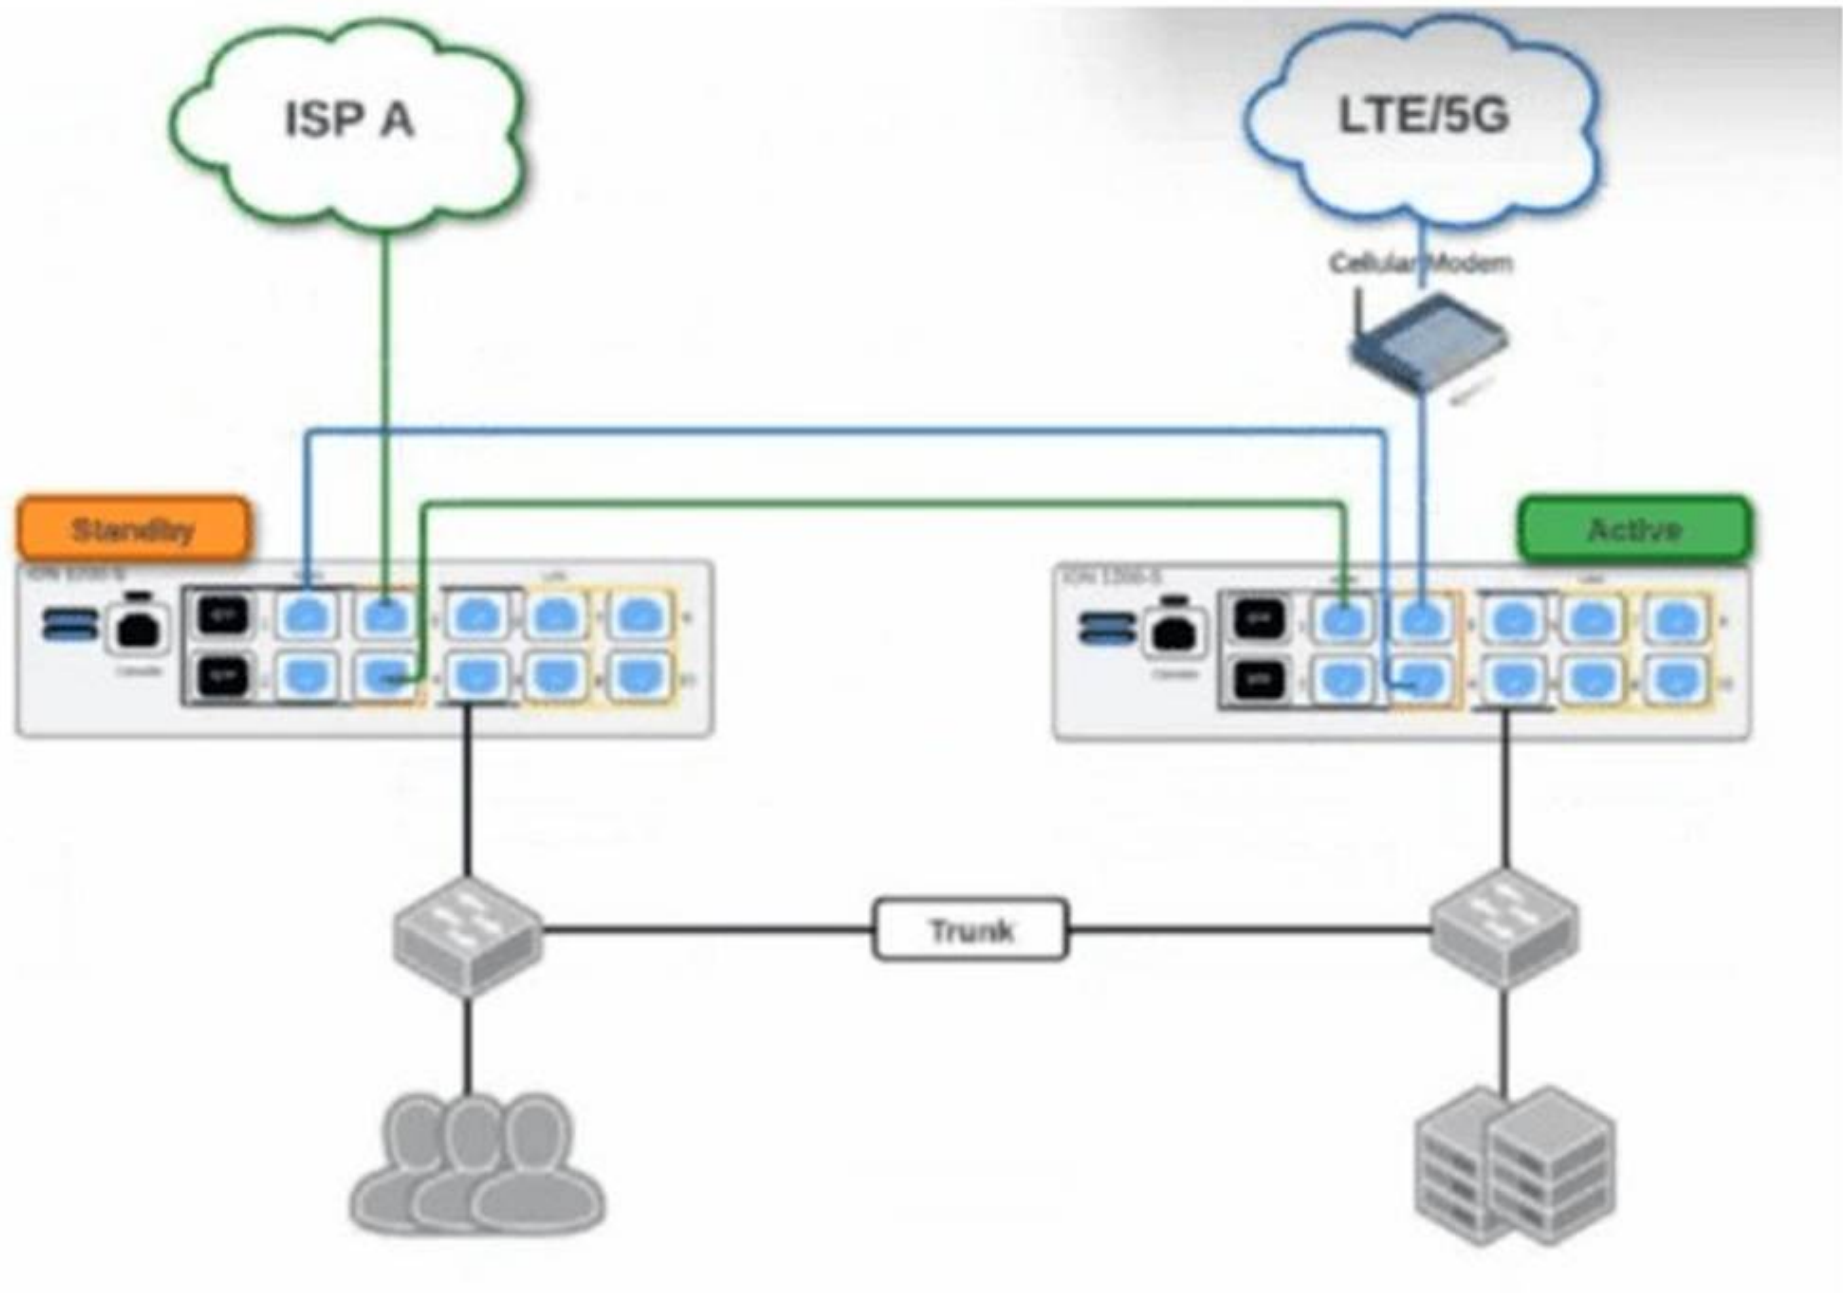

- A. Both the connection to ISP A and the connection to LTE/5G will be usable.
- B. The VRRP Virtual IP address assigned to any SVIs will be moved to the newly active ION.
- C. The newly active ION will send a gratuitous ARP to the LAN for the IP address of any SVIs.
- D. The connection to ISP A will be usable, but the connection to LTE/5G will not.

Answer: AC

NEW QUESTION 56

Which condition, when configured within a performance policy, is a trigger for generating an incident related to application performance or path degradation?

- A. Violation of defined service-level agreement (SLA) thresholds for application performance or link quality.
- B. Exceeding the configured threshold for total concurrent flows in the ION device, resulting in a `SYSTEM_CONCURRENT_FLOW_THRESHOLD_EXCEEDED` incident.
- C. Loss of a BGP peering session on a data center ION device, leading to potential routing instability.
- D. Physical WAN interface transitioning from an "up" to a "down" state, resulting in a `NETWORK_ANYNETLINK_DOWN` event.

Answer: A

NEW QUESTION 61

An administrator has configured a Zone-Based Firewall (ZBFW) policy on a branch ION. They created a rule to "Allow" traffic from the "Guest" zone to the "Internet" zone. However, users in the "Guest" zone are reporting they cannot reach a specific public website, and the Flow Browser shows the flow state as "REJECT".

What is the most likely reason for this specific rejection, assuming the "Allow" rule is correctly placed at the top of the list?

- A. The implicit default action at the bottom of the security policy is "Deny All".
- B. The "Allow" rule does not have the specific "Application" defined (it is set to Any), causing a mismatch.
- C. There is a "Deny" rule in the "Global" policy stack that is taking precedence over the "Local" site rule.
- D. The ION device does not support firewalling for HTTP traffic.

Answer: C

NEW QUESTION 66

For how many hours are Prisma SD-WAN VPN shared secrets valid?

- A. 1
- B. 8
- C. 24
- D. 72

Answer:

C

NEW QUESTION 67

Which implementation allows Prisma SD-WAN to improve application performance for organizations facing inconsistent user experiences across branch locations, especially due to varying device types and network conditions, by using Layer 4 and Layer 7 optimization to boost throughput?

- A. Packet duplication
- B. WAN optimization
- C. Forward Error Correction (FEC)
- D. Application acceleration

Answer: D

NEW QUESTION 72


In which modes can a Prisma SD-WAN branch be deployed?

- A. Testing, Control, POV
- B. Production, Control, Disabled
- C. Disabled, Analytics, Control
- D. POV, Production, Analytics

Answer: C

NEW QUESTION 75

Based on the HA topology image below, which two statements describe the end-state when power is removed from the ION 1200-S labeled ??Active??, assuming that the ION labeled ??Standby?? becomes the active ION? (Choose two.)

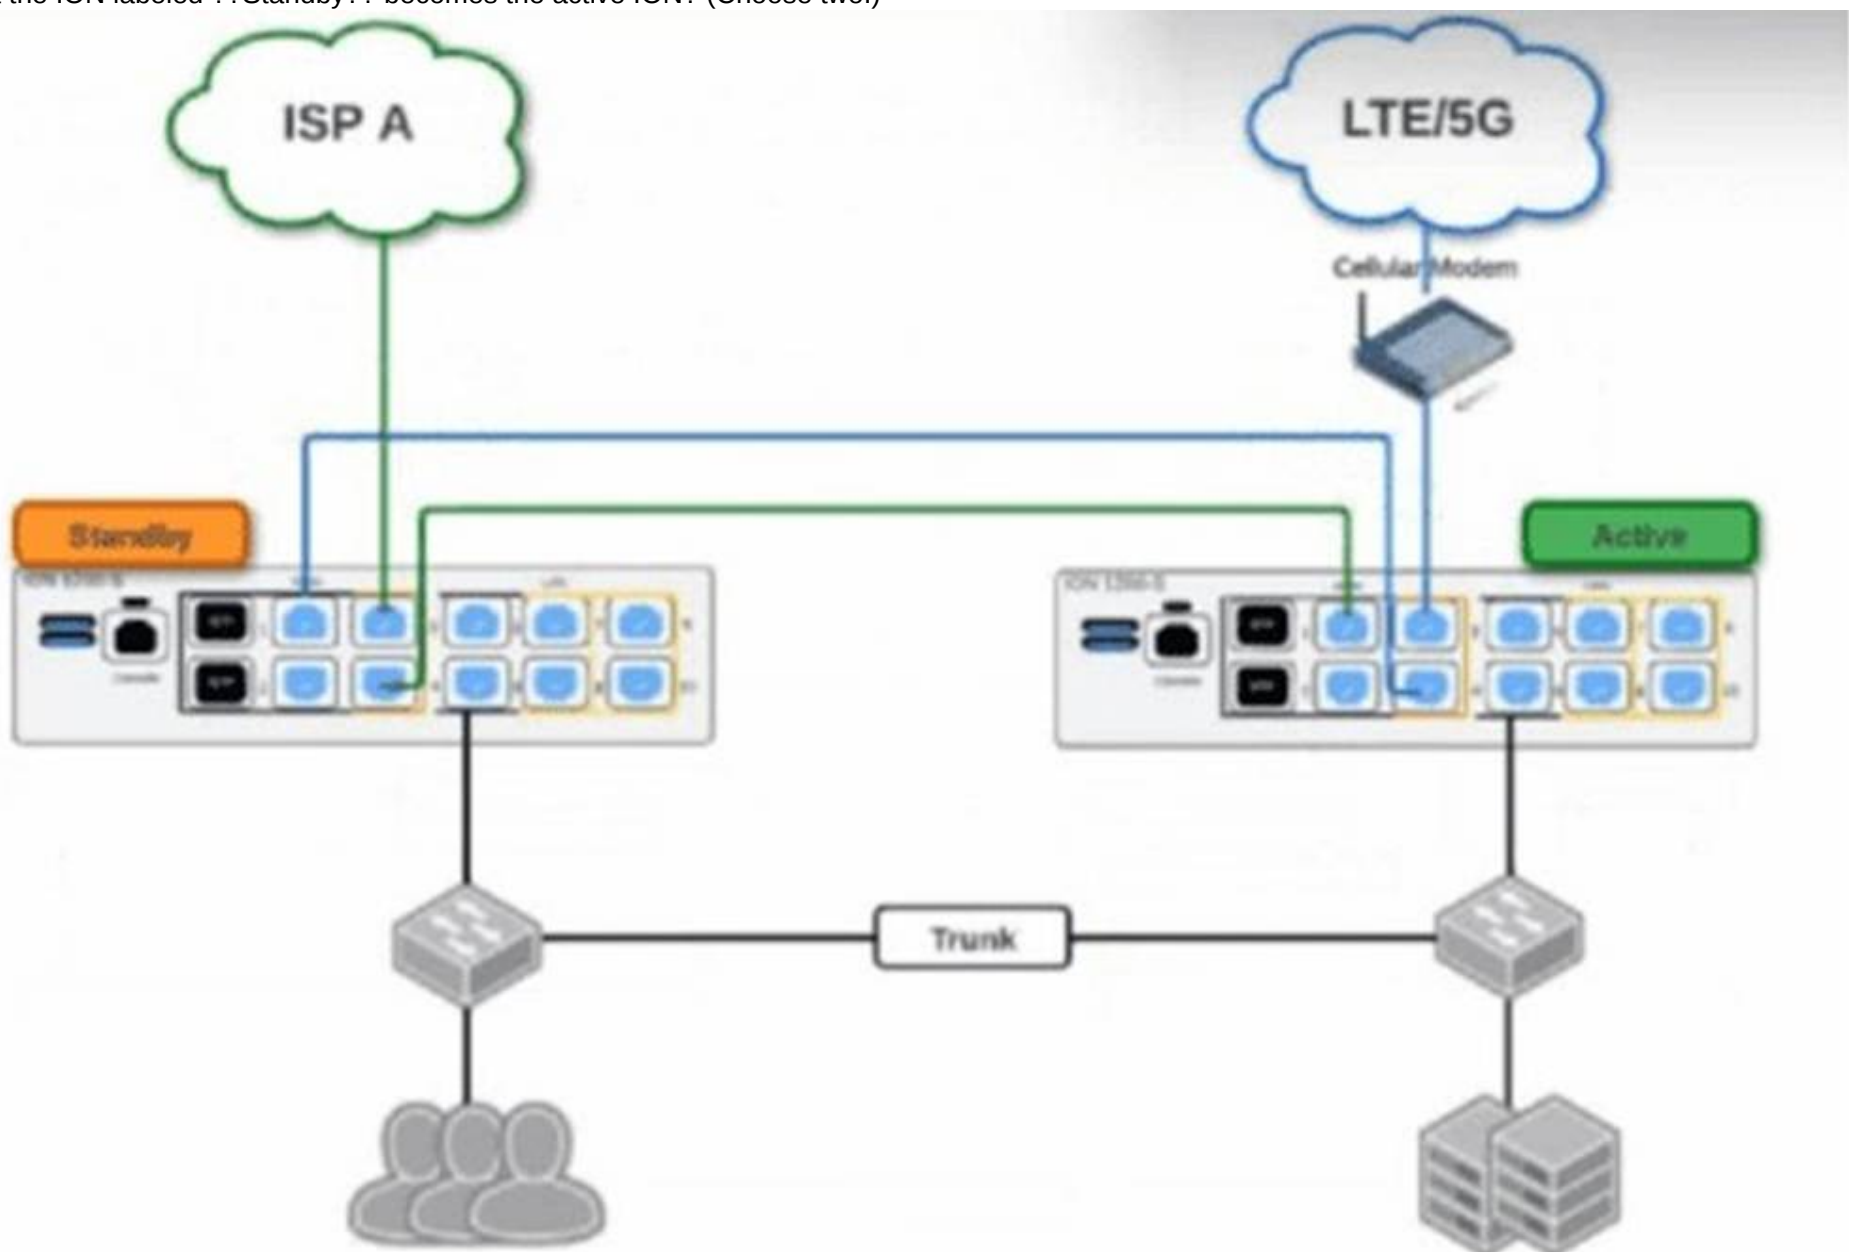

- A. Both the connection to ISP A and the connection to LTE/5G will be usable.
- B. The VRRP Virtual IP address assigned to any SVIs will be moved to the newly active ION.
- C. The newly active ION will send a gratuitous ARP to the LAN for the IP address of any SVIs.
- D. The connection to ISP A will be usable, but the connection to LTE/5G will not.

Answer: AC

NEW QUESTION 79

A network installer is at a remote branch site to deploy a new ION 3000 device. The device has been racked, cabled to the internet, and powered on. The installer has the "Claim Code" displayed on the email sent by the administrator. When the administrator enters this Claim Code into the Prisma SD-WAN portal, what is the immediate status of the device before the configuration is fully pushed?

- A. Online
- B. Claimed
- C. Provisioned
- D. Active

Answer: B

NEW QUESTION 83

When allocating Aggregate Bandwidth for a Prisma Access "Remote Network" deployment (connecting 50 branch sites), how is the bandwidth license enforced?

- A. Each branch site is hard-capped at the specific bandwidth limit defined in its individual IPSec tunnel configuration.
- B. The bandwidth is shared as a pool across all sites in a specific Compute Location (Region); individual sites can burst up to the available pool capacity.
- C. The bandwidth is allocated per device serial number and cannot be shared.
- D. The bandwidth license is only checked once during the initial onboarding; there is no ongoing enforcement.

Answer: B

NEW QUESTION 85

A network installer is attempting to claim a new ION device using the "Claim Code" method. The device is connected to the internet, but the status in the portal remains stuck at "Claimed" and does not transition to "Online". The installer connects a laptop to the LAN port of the ION and can successfully browse the internet, confirming the uplink is active.

What is the most likely cause of the device failing to reach the "Online" state?

- A. The device is missing the "Site" assignment in the portal.
- B. The upstream firewall is blocking outbound TCP port 443 or UDP port 123 (NTP).
- C. The device has not yet downloaded the latest software image.
- D. The "Circuit Label" has not been applied to the WAN interface.

Answer: B

NEW QUESTION 90

A network administrator notices that a branch ION device is experiencing high CPU utilization due to a suspected TCP SYN Flood attack originating from a compromised host on the local LAN.

Which specific security feature should be configured and applied to the "LAN" zone to mitigate this Denial of Service (DoS) attack?

- A. Zone-Based Firewall (ZBFW) Rule with a "Deny" action
- B. Zone Protection Profile
- C. Application Quality Profile (AQP)
- D. Access Control List (ACL) on the WAN interface

Answer: B

NEW QUESTION 93

In a Prisma SD-WAN deployment, what is the defining characteristic of a "Standard VPN" compared to a "Secure Fabric Link"?

- A. Standard VPNs use GRE encapsulation, while Secure Fabric Links use VXLAN.
- B. Standard VPNs are automatically built between ION devices, while Secure Fabric Links require manual configuration.
- C. Standard VPNs are manually configured IPSec tunnels to non-ION endpoints, while Secure Fabric Links are automated tunnels between ION devices.
- D. Standard VPNs support BGP, whereas Secure Fabric Links only support static routing.

Answer: C

NEW QUESTION 94

An engineer at a managed services provider is updating an application that allows its customers to request firewall changes to also manage SD-WAN. The application will be able to make any approved changes directly to devices via API.

What is a requirement for the application to create SD-WAN interfaces?

- A. REST API's `sdwanInterfaceprofiles` parameter on a Panorama device
- B. REST API's `sdwanInterfaces` parameter on a firewall device
- C. XML API's `sdwanprofiles/interfaces` parameter on a Panorama device
- D. XML API's `InterfaceProfiles/sdwan` parameter on a firewall device

Answer: B

NEW QUESTION 97


During the Zero Touch Provisioning (ZTP) process of a new ION device at a branch site, which interface ports are supported by default to request an IP address via DHCP and reach the Prisma SD-WAN controller for claiming?

- A. Only the dedicated Controller port (if available)
- B. Any LAN or WAN port on the device
- C. The dedicated Controller port, or Port 1 / Internet 1 if a dedicated port is absent
- D. Only the USB port via a cellular modem

Answer: C

NEW QUESTION 100

There are periodic complaints about the poor performance of a real-time application.

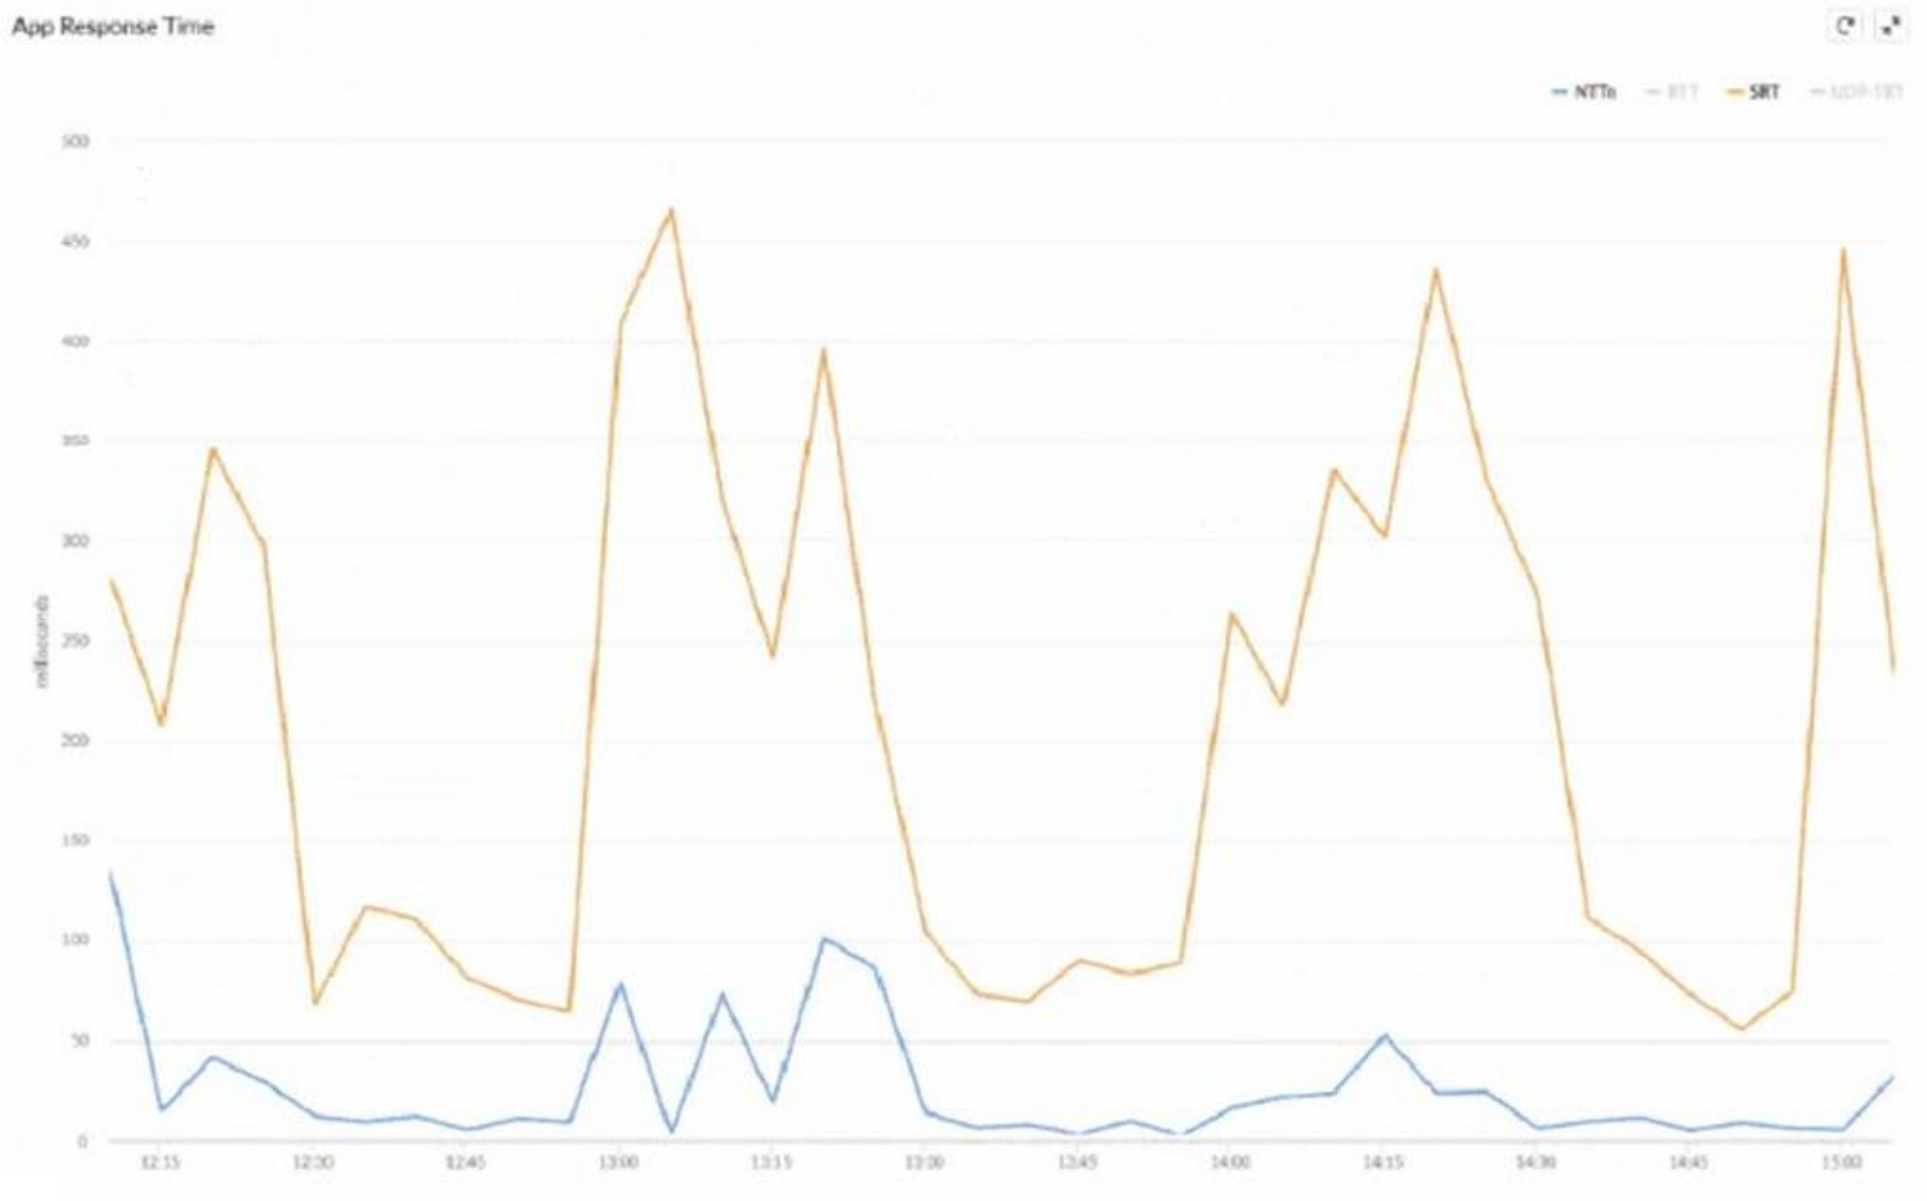

What can be inferred about the performance issue, based on the Network Transfer Time (NTT) and Server Response Time (SRT) image below?

- A. The NTT value increases periodically resulting in higher SRT.
- B. The NTT value drops periodically due to network related issues.
- C. The SRT value increases periodically due to Application Server side issues.
- D. The SRT value drops periodically due to Application Server side issues.

Answer: C

NEW QUESTION 103

When integrating Prisma SD-WAN with Prisma Access, what is the specific role of the Service Connection (SC)?

- A. It connects the Prisma Access cloud infrastructure back to the customer's Headquarters or Data Center for access to internal private resources (e.g., AD, DNS, Intranet).
- B. It is the IPsec tunnel that connects a Branch site to the Prisma Access gateway for internet access.
- C. It is the SSL VPN portal used by mobile users to connect to the network.
- D. It is the peering link between different Prisma Access regions to optimize global traffic.

Answer: A

NEW QUESTION 104

A network administrator is troubleshooting a critical SaaS application, ??SuperSaaSApp??, that is experiencing connectivity issues. Initially, the configured active and backup paths for the application were reported as completely down at Layer 3. The Prisma SD-WAN system attempted to route traffic for the application over an L3 failure path that was explicitly configured as a Standard VPN to Prisma Access.

However, users are still reporting a complete outage for the application and monitoring tools show application flows being dropped when attempting to use the Standard VPN L3 failure path, even though the tunnel itself appears to be up. The administrator suspects a policy misconfiguration related to how the Standard VPN path interacts with destination groups.

What is the most likely reason for flows being dropped when attempting to use the Standard VPN L3 failure path?

- A. The ??Move Flows Forced?? action was not enabled in the performance policy for ??SuperSaaSApp??, preventing the system from actively shifting traffic to the L3 failure path.
- B. The path policy rule for ??SuperSaaSApp?? has the ??Required?? checkbox selected for its Service & DC Group, but no direct paths were configured alongside it, creating a conflict.
- C. The path policy rule explicitly designates a Standard VPN as the L3 failure path, but it does not include a designated Standard Services and DC Group, causing traffic to be dropped.
- D. The Standard VPN in the path policy was not configured to ??Minimize Cellular Usage??, leading to the depletion of metered data and subsequent flow drops.

Answer: C

NEW QUESTION 106

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

SD-WAN-Engineer Practice Exam Features:

- * SD-WAN-Engineer Questions and Answers Updated Frequently
- * SD-WAN-Engineer Practice Questions Verified by Expert Senior Certified Staff
- * SD-WAN-Engineer Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * SD-WAN-Engineer Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The SD-WAN-Engineer Practice Test Here](#)