

350-401 Dumps

Implementing and Operating Cisco Enterprise Network Core Technologies

<https://www.certleader.com/350-401-dumps.html>



NEW QUESTION 1

Which two pieces of information are necessary to compute SNR? (Choose two.)

- A. EIRP
- B. noise floor
- C. antenna gain
- D. RSSI
- E. transmit power

Answer: BD

NEW QUESTION 2

A network administrator is implementing a routing configuration change and enables routing debugs to track routing behavior during the change. The logging output on the terminal is interrupting the command typing process. Which two actions can the network administrator take to minimize the possibility of typing commands incorrectly? (Choose two.)

- A. Configure the logging synchronous global configuration command
- B. Configure the logging delimiter feature
- C. Configure the logging synchronous command under the vty
- D. Press the TAB key to reprint the command in a new line
- E. increase the number of lines on the screen using the terminal length command

Answer: CD

NEW QUESTION 3

Refer to the exhibit.

```
R1# sh run | begin line con
line con 0
  exec-timeout 0 0
  privilege level 15
  logging synchronous
  stopbits 1
line aux 0
  exec-timeout 0 0
  privilege level 15
  logging synchronous
  stopbits 1
line vty 0 4
  password 7 045802150C2E
  login
line vty 5 15
  password 7 045802150C2E
  login
!
end

R1# sh run | include aaa | enable
no aaa new-model
R1#
```

Which privilege level is assigned to VTY users?

- A. 1
- B. 7
- C. 13
- D. 15

Answer: D

NEW QUESTION 4

What is the structure of a JSON web token?

- A. three parts separated by dots: header payload, and signature
- B. header and payload
- C. three parts separated by dots: version header and signature
- D. payload and signature

Answer: A

NEW QUESTION 5

A network is being migrated from IPV4 to IPV6 using a dual-stack approach. Network management is already 100% IPV6 enabled. In a dual-stack network with two dual-stack NetFlow collections, how many flow exporters are needed per network device in the flexible NetFlow configuration?

- A. 1
- B. 2
- C. 4
- D. 8

Answer: B

NEW QUESTION 6

Refer to the exhibit.

```
Extended IP access list EGRESS
10 permit ip 10.0.0.0 0.0.0.255 any
|
<Output Omitted>
|
interface GigabitEthernet0/0
ip address 209.165.200.225 255.255.255.0
ip access-group EGRESS out
duplex auto
speed auto
media-type rj45
|
```

An engineer must block all traffic from a router to its directly connected subnet 209.165.200.0/24. The engineer applies access control list EGRESS in the outbound direction on the GigabitEthernet0/0 interface of the router. However, the router can still ping hosts on the 209.165.200.0/24 subnet. Which

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:


of this behavior is true?

- A. Access control lists that are applied outbound to a router interface do not affect traffic that is sourced from the router.
- B. Only standard access control lists can block traffic from a source IP address.
- C. After an access control list is applied to an interface, that interface must be shut and no shut for the access control list to take effect.
- D. The access control list must contain an explicit deny to block traffic from the router.

Answer: A

NEW QUESTION 7

Refer to the exhibit.

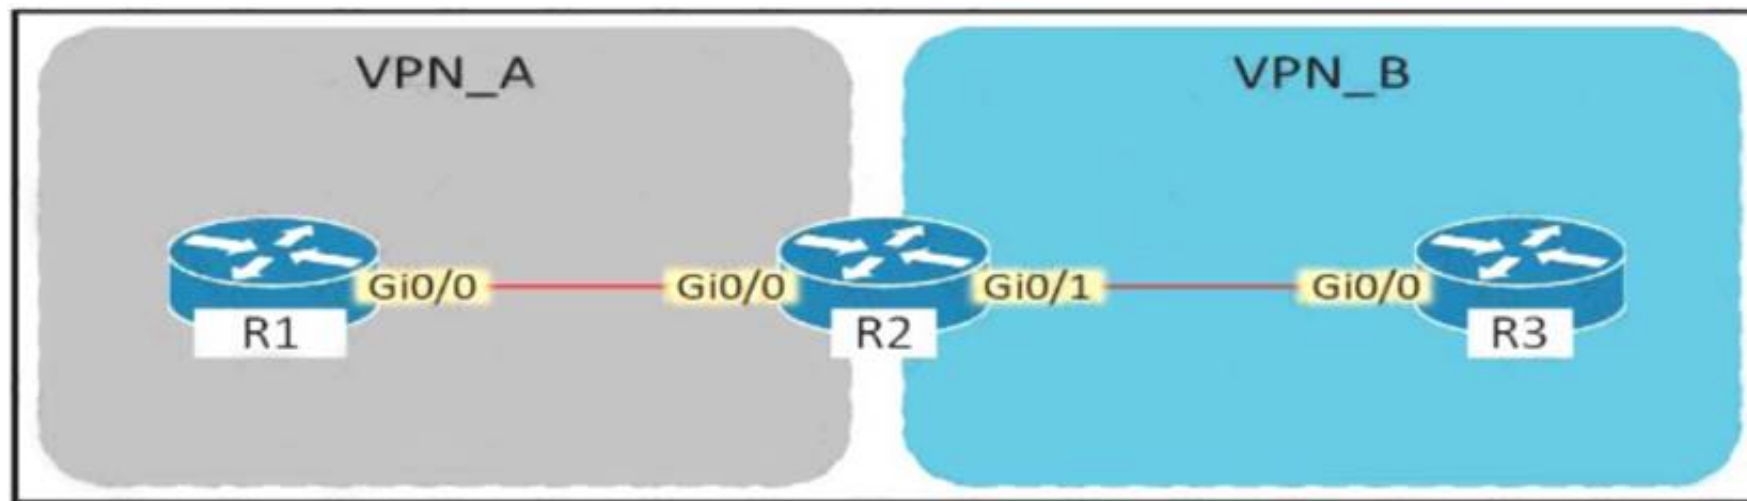

Assuming that R is a CE router, which VRF is assigned to Gi0/0 on R1?

- A. VRF VPN_B
- B. Default VRF
- C. Management VRF
- D. VRF VPN_A

Answer: D

NEW QUESTION 8

Which statement about agent-based versus agentless configuration management tools is true?

- A. Agentless tools require no messaging systems between master and slaves.
- B. Agentless tools use proxy nodes to interface with slave nodes.
- C. Agent-based tools do not require a high-level language interpreter such as Python or Ruby on slave nodes.
- D. Agent-based tools do not require installation of additional software packages on the slave nodes.

Answer: D

NEW QUESTION 9

Which protocol does REST API rely on to secure the communication channel?

- A. TCP
- B. HTTPS
- C. SSH
- D. HTTP

Answer: B

NEW QUESTION 10

Which statement about multicast RPs is true?

- A. RPs are required only when using protocol independent multicast dense mode.
- B. RPs are required for protocol independent multicast sparse mode and dense mode.
- C. By default, the RP is needed periodically to maintain sessions with sources and receivers
- D. By default, the RP is needed only to start new sessions with sources and receivers.

Answer: D

NEW QUESTION 10

Which two mechanisms are available to secure NTP? (Choose two.)

- A. IP prefix list-based
- B. IPsec
- C. TACACS-based authentication
- D. IP access list-based
- E. Encrypted authentication

Answer: DE

NEW QUESTION 11

Which statement explains why Type 1 hypervisor is considered more efficient than Type 2 hypervisor?

- A. Type 1 hypervisor runs directly on the physical hardware of the host machine without relying on the underlying OS.
- B. Type 1 hypervisor enables other operating systems to run on it.
- C. Type 1 hypervisor relies on the existing OS of the host machine to access CPU, memory, storage, and network resources.
- D. Type 1 hypervisor is the only type of hypervisor that supports hardware acceleration techniques.

Answer: A

NEW QUESTION 14

Which statement about a fabric access point is true?

- A. It is in local mode and must be connected directly to the fabric border node.
- B. It is in FlexConnect mode and must be connected directly to the fabric border node.
- C. It is in local mode and must be connected directly to the fabric edge switch.
- D. It is in FlexConnect mode and must be connected directly to the fabric edge switch.

Answer: C

NEW QUESTION 16

Drag and drop the characteristics from the left onto the correct infrastructure deployment types on the right.

customizable hardware, purpose-built systems	On Premises
easy to scale and upgrade	
more suitable for companies with specific regulatory or security requirements	
resources can be over or underutilized as requirements vary	Cloud
requires a strong and stable internet connection	
built-in, automated data backups and recovery	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

On premise: customizable, specific requirements, resources Cloud: scale, built-in automated backup, strong stable internet

NEW QUESTION 21

Which OSPF network types are compatible and allow communication through the two peering devices?

- A. broadcast to nonbroadcast
- B. point-to-multipoint to nonbroadcast
- C. broadcast to point-to-point
- D. point-to-multipoint to broadcast

Answer: B

NEW QUESTION 22

Which method creates an EEM applet policy that is registered with EEM and runs on demand or manually?

- A. event manager applet ondemand event registeraction 1.0 syslog priority critical msg 'This is a message from ondemand'
- B. event manager applet ondemand event manualaction 1.0 syslog priority critical msg 'This is a message from ondemand'
- C. event manager applet ondemand event noneaction 1.0 syslog priority critical msg 'This is a message from ondemand'
- D. event manager applet ondemandaction 1.0 syslog priority critical msg 'This is a message from ondemand'

Answer: C

NEW QUESTION 25


Which access controls list allows only TCP traffic with a destination port range of 22-433, excluding port 80?

- A. Deny tcp any any eq 80 Permit tcp any any gt 21 lt 444
- B. Permit tcp any any ne 80
- C. Permit tcp any any range 22 443 Deny tcp any any eq 80
- D. Deny tcp any any ne 80Permit tcp any any range 22 443

Answer: A

NEW QUESTION 26

Refer to exhibit.

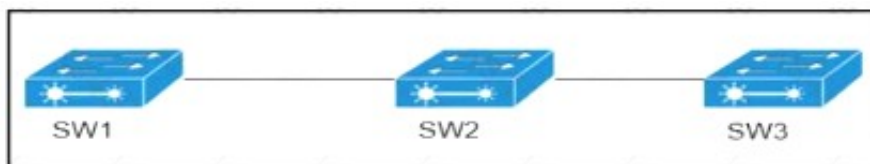

VLANs 50 and 60 exist on the trunk links between all switches All access ports on SW3 are configured for VLAN 50 and SW1 is the VTP server Which command ensures that SW3 receives frames only from VLAN 50?

- A. SW1 (config)#vtp pruning
- B. SW3(config)#vtp mode transparent
- C. SW2(config)=vtp pruning
- D. SW1 (config >»vtp mode transparent

Answer: A

NEW QUESTION 29


What the role of a fusion in an SD-Access solution?

- A. provides connectivity to external networks
- B. acts as a DNS server
- C. performs route leaking between user-defined virtual networks and shared services
- D. provides additional forwarding capacity to the fabric

Answer: C

NEW QUESTION 31

Which exhibit displays a valid JSON file?

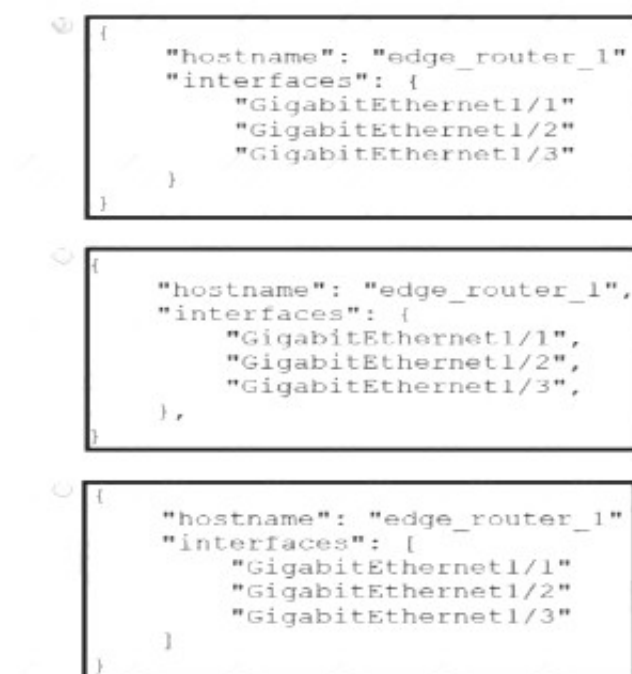


```
{
  "hostname": "edge_router_1",
  "interfaces": [
    "GigabitEthernet1/1",
    "GigabitEthernet1/2",
    "GigabitEthernet1/3"
  ]
}
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 33

Which DNS lookup does an access point perform when attempting CAPWAP discovery?

- A. CISCO-DNA-CONTROLLER local
- B. CAPWAP-CONTROLLER local
- C. CISCO-CONTROLLER local
- D. CISCO-CAPWAP-CONTROLLER local

Answer: D

NEW QUESTION 38

Which statements are used for error handling in Python?

- A. try/catch
- B. try/except
- C. block/rescue
- D. catch/release

Answer: B

NEW QUESTION 41

Which statement about an RSPAN session configuration is true?

- A. A filter must be configured for RSPAN Regions
- B. Only one session can be configured at a time
- C. A special VLAN type must be used as the RSPAN destination.
- D. Only incoming traffic can be monitored

Answer: C

NEW QUESTION 45

Refer to the exhibit.



Link1 is a copper connection and Link2 is a fiber connection. The fiber port must be the primary port for all forwarding. The output of the show spanning-tree command on SW2 shows that the fiber port is blocked by spanning tree. An engineer enters the spanning-tree port-priority 32 command on G0/1 on SW2, but the port remains blocked. Which command should be entered on the ports that are connected to Link2 to resolve the issue?

- A. Enter spanning-tree port-priority 32 on SW1.
- B. Enter spanning-tree port-priority 224 on SW1.

- C. Enter spanning-tree port-priority 4 on SW2.
- D. Enter spanning-tree port-priority 64 on SW2.

Answer: A

NEW QUESTION 47

Which LISP infrastructure device provides connectivity between non-sites and LISP sites by receiving non-LISP traffic with a LISP site destination?

- A. PETR
- B. PITR
- C. map resolver
- D. map server

Answer: B

NEW QUESTION 52

Which First Hop Redundancy Protocol maximizes uplink utilization and minimizes the amount of configuration that is necessary?

- A. GLBP
- B. HSRP v2
- C. VRRP
- D. HSRP v1

Answer: A

NEW QUESTION 57

What do Cisco DNA southbound APIs provide?

- A. Interface between the controller and the network devices
- B. NETCONF API interface for orchestration communication
- C. RESful API interface for orchestrator communication
- D. Interface between the controller and the consumer

Answer: A

NEW QUESTION 59

Refer to the exhibit.



The WLC administrator sees that the controller to which a roaming client associates has Mobility Role Anchor configured under Clients > Detail. Which type of roaming is supported?

- A. Indirect
- B. Layer 3 intercontroller
- C. Layer 2 intercontroller
- D. Intracontroller

Answer: B

NEW QUESTION 62

Refer to this output. What is the logging severity level?

R1#Feb 14 37:15:12:429: %LINEPROTO-5-UPDOWN Line protocol on interface GigabitEthernet0/1. Change state to up

- A. Notification
- B. Alert
- C. Critical
- D. Emergency

Answer: A

NEW QUESTION 65

Which technology provides a secure communication channel for all traffic at Layer 2 of the OSI model?

- A. MACsec
- B. IPsec
- C. SSL
- D. Cisco Trustsec

Answer: A

NEW QUESTION 70

Which action is the vSmart controller responsible for in an SD-WAN deployment?

- A. onboard vEdge nodes into the SD-WAN fabric
- B. distribute security information for tunnel establishment between vEdge routers
- C. manage, maintain, and gather configuration and status for nodes within the SD-WAN fabric
- D. gather telemetry data from vEdge routers

Answer: B

NEW QUESTION 74

Which feature must be configured to allow packet capture over Layer 3 infrastructure'?

- A. VSPAN
- B. IPSPAN
- C. RSPAN
- D. ERSPAN

Answer: D

NEW QUESTION 77

Which QoS component alters a packet to change the way that traffic is treated in the network?

- A. Marking
- B. Classification
- C. Shaping
- D. Policing

Answer: A

NEW QUESTION 81

How does Cisco Trustsec enable more flexible access controls for dynamic networking environments and data centers?

- A. uses flexible NetFlow
- B. assigns a VLAN to the endpoint
- C. classifies traffic based on the contextual identity of the endpoint rather than its IP address
- D. classifies traffic based on advanced application recognition

Answer: C

NEW QUESTION 86


Which description of an SD-Access wireless network infrastructure deployment is true?

- A. The access point is part of the fabric underlay.
- B. The WLC is part of the fabric underlay.
- C. The access point is part the fabric overlay.
- D. The wireless client is part of the fabric overlay.

Answer: C

NEW QUESTION 91

Refer to the exhibit.

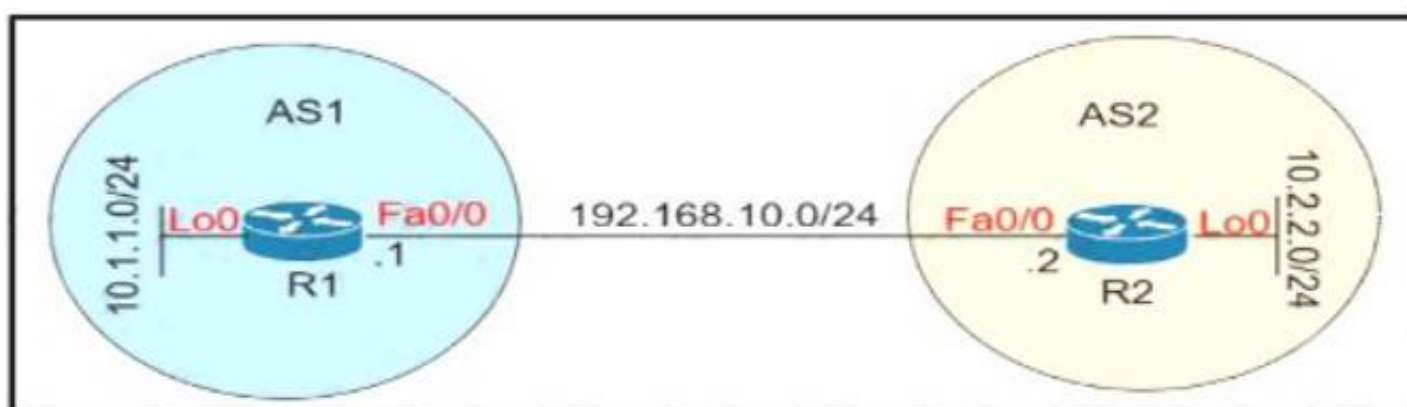

Which configuration establishes EBGP neighborship between these two directly connected neighbors and exchanges the loopback network of the two routers through BGP?

A)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 192.168.10.2 remote-as 2
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 192.168.10.1 remote-as 1
R2(config-router)#network 10.2.2.0 mask 255.255.255.0
```

B)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 10.2.2.2 remote-as 2
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 10.1.1.1 remote-as 1
R2(config-router)#network 10.2.2.0 mask 255.255.255.0
```

C)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 192.168.10.2 remote-as 2
R1(config-router)#network 10.0.0.0 mask 255.0.0.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 192.168.10.1 remote-as 1
R2(config-router)#network 10.0.0.0 mask 255.0.0.0
```

D)

```
R1(config)#router bgp 1
R1(config-router)#neighbor 10.2.2.2 remote-as 2
R1(config-router)#neighbor 10.2.2.2 update-source lo0
R1(config-router)#network 10.1.1.0 mask 255.255.255.0
```

```
R2(config)#router bgp 2
R2(config-router)#neighbor 10.1.1.1 remote-as 1
R2(config-router)#neighbor 10.1.1.1 update-source lo0
R2(config-router)#network 10.2.2.0 mask 255.255.255.0
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: A**NEW QUESTION 96**

Which JSON syntax is valid?

- ☐ {"switch": "name": "dist1", "interfaces": ["gig1", "gig2", "gig3"]}
- ☐ { "switch": { "name": "dist1", "interfaces": ["gig1", "gig2", "gig3"] }}
- ☒ {"switch": {"name": "dist1", "interfaces": ["gig1", "gig2", "gig3"]}}
- ☐ [/switch/]: [/name/: "dist1", /interfaces/: ["gig1", "gig2", "gig3"]}]

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 97

Which two protocols are used with YANG data models? (Choose two.)

- A. HTTPS
- B. SSH
- C. RESTCONF
- D. TLS
- E. NETCONF

Answer: CE

NEW QUESTION 98

Refer to the exhibit.

```
Extended IP access list EGRESS
10 permit ip 10.1.100.0 0.0.0.255 10.1.2.0 0.0.0.255
20 deny ip any any
```

An engineer must modify the access control list EGRESS to allow all IP traffic from subnet 10.1.10.0/24 to 10.1.2.0/24. The access control list is applied in the outbound direction on router interface GigabitEthernet 0/1. Which configuration commands can the engineer use to allow this traffic without disrupting existing traffic flows?

A)

```
config t
  ip access-list extended EGRESS
  permit ip 10.1.10.0 255.255.255.0 10.1.2.0 255.255.255.0
```

B)

```
config t
  ip access-list extended EGRESS
  5 permit ip 10.1.10.0 0.0.0.255 10.1.2.0 0.0.0.255
```

C)

```
config t
  ip access-list extended EGRESS2
  permit ip 10.1.10.0 0.0.0.255 10.1.2.0 0.0.0.255
  permit ip 10.1.100.0 0.0.0.255 10.1.2.0 0.0.0.255
  deny ip any any
!
interface g0/1
  no ip access-group EGRESS out
  ip access-group EGRESS2 out
```

D)

```
config t
  ip access-list extended EGRESS
  permit ip 10.1.10.0 0.0.0.255 10.1.2.0 0.0.0.255
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: B

NEW QUESTION 101

Drag and drop the characteristics from the left onto the correct routing protocol types on the right.

supports unequal path load balancing
link state routing protocol
distance vector routing protocol
metric is based on delay and reliability by default
makes it easy to segment the network logically
constructs three tables as part of its operation: neighbor table, topology table, and routing table

OSPF

EIGRP

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

OSPF: SEGMENT, LINK STATE, TABLES

EIGRP: UNEQUAL PATH, DISTANCE VECTOR, METRIC

NEW QUESTION 102

Refer to the exhibit.

```
SwitchC#show vtp status
VTP Version                : 2
Configuration Revision      : 0
Maximum VLANs supported locally : 255
Number of existing VLANs    : 8
VTP Operating Mode          : Transparent
VTP Domain Name              : cisco.com
VTP Pruning Mode             : Disabled
VTP V2 Mode                  : Disabled
VTP Traps Generation         : Disabled
MD5 digest                   : 0xE5 0x28 0x5D 0x3E 0x2F 0xE5 0xAD 0x2B
Configuration last modified by 0.0.0.0 at 1-10-19 09:01:38

SwitchC#show vlan brief

VLAN Name                Status    Ports
-----
1    default              active    Fa0/3, Fa0/4, Fa0/5, Fa0/6
                                           Fa0/7, Fa0/8, Fa0/9, Fa0/10
                                           Fa0/11, Fa0/12, Fa0/13, Fa0/14
                                           Fa0/15, Fa0/16, Fa0/17, Fa0/18
                                           Fa0/19, Fa0/20, Fa0/21, Fa0/22
                                           Fa0/23, Fa0/24, Po1
110  Finance              active
210  HR                    active    Fa0/1
310  Sales                  active    Fa0/2
[...output omitted...]

SwitchC#show int trunk
Port      Mode      Encapsulation  Status      Native vlan
Gig1/1    on        802.1q         trunking    1
Gig1/2    on        802.1q         trunking    1

Port      Vlans allowed on trunk
Gig1/1    1-1005
Gig1/2    1-1005

Port      Vlans allowed and active in management domain
Gig1/1    1,110,210,310
Gig1/2    1,110,210,310

Port      Vlans in spanning tree forwarding state and not pruned
Gig1/1    1,110,210,310
Gig1/2    1,110,210,310

SwitchC#show run interface port-channel 1
interface Port-channel 1
 description Uplink_to_Core
 switchport mode trunk
```

SwitchC connects HR and Sales to the Core switch However, business needs require that no traffic from the Finance VLAN traverse this switch Which command meets this requirement?

A)

```
SwitchC(config)#vtp pruning
```

B)

```
SwitchC(config)#vtp pruning vlan 110
```

C)

```
SwitchC(config)#interface port-channel 1
SwitchC(config-if)#switchport trunk allowed vlan add 210,310
```

D)

```
SwitchC(config)#interface port-channel 1
SwitchC(config-if)#switchport trunk allowed vlan remove 110
```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Answer: D

NEW QUESTION 106

Refer to the exhibit.

Based on the configuration in this WLAN security setting, Which method can a client use to authenticate to the network?

- A. text string
- B. username and password
- C. certificate
- D. RADIUS token

Answer: A

NEW QUESTION 111

Which two descriptions of FlexConnect mode for Cisco APs are true? (Choose two.)

- A. APs that operate in FlexConnect mode cannot detect rogue Aps.
- B. FlexConnect mode is used when the APs are set up in a mesh environment and used to bridge between each other.
- C. FlexConnect mode is a feature that is designed to allow specified CAPWAP-enabled APs to exclude themselves from managing data traffic between clients and infrastructure.
- D. When connected to the controller, FlexConnect APs can tunnel traffic back to the controller.
- E. FlexConnect mode is a wireless solution for branch office and remote office deployments.

Answer: CD

NEW QUESTION 114

Which NGFW mode block flows crossing the firewall?

- A. Passive
- B. Tap
- C. Inline tap
- D. Inline

Answer: C

NEW QUESTION 118

Which controller is the single plane of management for Cisco SD-WAN?

- A. vBond
- B. vEdge
- C. vSmart
- D. vManage

Answer: D

NEW QUESTION 121

What is the difference between a RIB and a FIB?

- A. The RIB is used to make IP source prefix-based switching decisions
- B. The FIB is where all IP routing information is stored
- C. The RIB maintains a mirror image of the FIB
- D. The FIB is populated based on RIB content

Answer: D

NEW QUESTION 124

Which LISP device is responsible for publishing EID-to-RLOC mappings for a site?

- A. ETR
- B. MS
- C. ITR
- D. MR

Answer: A

NEW QUESTION 127

Which feature does Cisco TrustSec use to provide scalable, secure communication throughout a network?

- A. security group tag ACL assigned to each port on a switch
- B. security group tag number assigned to each port on a network
- C. security group tag number assigned to each user on a switch
- D. security group tag ACL assigned to each router on a network

Answer: B

NEW QUESTION 131

What are two common sources of interference for WI-FI networks? (Choose two.)

- A. radar
- B. LED lights
- C. rogue AP
- D. conventional oven
- E. fire alarm

Answer: AC

NEW QUESTION 132

A client with IP address 209.165.201.25 must access a web server on port 80 at 209.165.200.225. To allow this traffic, an engineer must add a statement to an access control list that is applied in the inbound direction on the port connecting to the web server. Which statement allows this traffic?

- A. permit tcp host 209.165.200.225 eq 80 host 209.165.201.25
- B. permit tcp host 209.165.201.25 host 209.165.200.225 eq 80
- C. permit tcp host 209.165.200.225 lt 80 host 209.165.201.25
- D. permit tcp host 209.165.200.225 host 209.165.201.25 eq 80

Answer: B

NEW QUESTION 136

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your 350-401 Exam with Our Prep Materials Via below:

<https://www.certleader.com/350-401-dumps.html>