


AWS-Certified-Developer-Associate Dumps

Amazon AWS Certified Developer - Associate

<https://www.certleader.com/AWS-Certified-Developer-Associate-dumps.html>

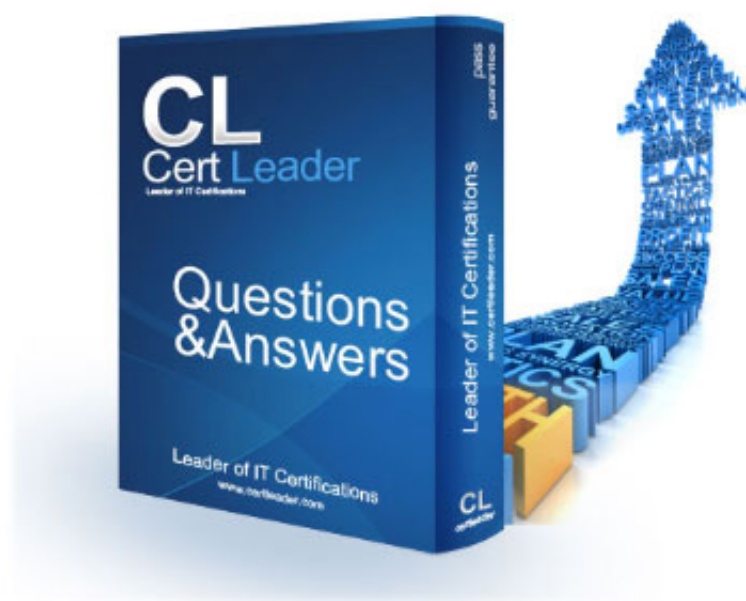

NEW QUESTION 1

A user is running a MySQL RDS instance. The user will not use the DB for the next 3 months. How can the user save costs?

- A. Pause the RDS instance from CLI until it is required in the future
- B. Stop the RDS instance
- C. Create a snapshot of RDS to launch in the future and terminate the instance now
- D. Change the instance size to micro

Answer: C

Explanation:

The RDS instances unlike the AWS EBS backed instances cannot be stopped or paused. The user needs to take the final snapshot, terminate the instance and launch a new instance in the future from that snapshot

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Overview.BackingUpAndRestoringAmazonRDSInstances.html>

NEW QUESTION 2

You have been doing a lot of testing of your VPC Network by deliberately failing EC2 instances to test whether instances are failing over properly. Your customer who will be paying the AWS bill for all this asks you if he being charged for all these instances. You try to explain to him how the billing works on EC2 instances to the best of your knowledge. What would be an appropriate response to give to the customer in regards to this?

- A. Billing commences when Amazon EC2 AMI instance is completely up and billing ends as soon as the instance starts to shutdown.
- B. Billing commences when Amazon EC2 initiates the boot sequence of an AMI instance and billing ends when the instance shuts down.
- C. Billing only commences only after 1 hour of uptime and billing ends when the instance terminates.
- D. Billing commences when Amazon EC2 initiates the boot sequence of an AMI instance and billing ends as soon as the instance starts to shutdown.

Answer: B

Explanation:

Billing commences when Amazon EC2 initiates the boot sequence of an AMI instance. Billing ends when the instance shuts down, which could occur through a web services command, by running "shutdown -h", or through instance failure.

Reference: <http://aws.amazon.com/ec2/faqs/#Billing>

NEW QUESTION 3

An organization has 500 employees. The organization wants to set up AWS access for each department. Which of the below mentioned options is a possible solution?

- A. Create IAM roles based on the permission and assign users to each role
- B. Create IAM users and provide individual permission to each
- C. Create IAM groups based on the permission and assign IAM users to the groups
- D. It is not possible to manage more than 100 IAM users with AWS

Answer: C

Explanation:

An IAM group is a collection of IAM users. Groups let the user specify permissions for a collection of users, which can make it easier to manage the permissions for those users.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_WorkingWithGroupsAndUsers.html

NEW QUESTION 4

An organization has hosted an application on the EC2 instances. There will be multiple users connecting to the instance for setup and configuration of application. The organization is planning to implement certain security best practices. Which of the below mentioned pointers will not help the organization achieve better security arrangement?

- A. Apply the latest patch of OS and always keep it updated.
- B. Allow only IAM users to connect with the EC2 instances with their own secret access key.
- C. Disable the password based login for all the user
- D. All the users should use their own keys to connect with the instance securely.
- E. Create a procedure to revoke the access rights of the individual user when they are not required to connect to EC2 instance anymore for the purpose of application configuration.

Answer: B

Explanation:

Since AWS is a public cloud any application hosted on EC2 is prone to hacker attacks. It becomes extremely important for a user to setup a proper security mechanism on the EC2 instances. A few of the security measures are listed below:

Always keep the OS updated with the latest patch

Always create separate users within OS if they need to connect with the EC2 instances, create their keys and disable their password

Create a procedure using which the admin can revoke the access of the user when the business work on the EC2 instance is completed

Lock down unnecessary ports

Audit any proprietary applications that the user may be running on the EC2 instance

Provide temporary escalated privileges, such as sudo for users who need to perform occasional privileged tasks

The IAM is useful when users are required to work with AWS resources and actions, such as launching an instance. It is not useful to connect (RDP / SSH) with an instance.

Reference: <http://aws.amazon.com/articles/1233/>

NEW QUESTION 5

A user is planning to make a mobile game which can be played online or offline and will be hosted on EC2.

The user wants to ensure that if someone breaks the highest score or they achieve some milestone they can inform all their colleagues through email. Which of the below mentioned AWS services helps achieve this goal?

- A. AWS Simple Workflow Service.
- B. AWS Simple Queue Service.
- C. Amazon Cognito
- D. AWS Simple Email Service

Answer: D

Explanation:

Amazon Simple Email Service (Amazon SES) is a highly scalable and cost-effective email-sending service for businesses and developers. It integrates with other AWS services, making it easy to send emails from applications that are hosted on AWS.

Reference: <http://aws.amazon.com/ses/faqs/>

NEW QUESTION 6

True or False: In DynamoDB, Scan operations are always eventually consistent.

- A. No, scan is like Query operation
- B. Yes
- C. No, scan is strongly consistent by default
- D. No, you can optionally request strongly consistent scan

Answer: B

Explanation:

In DynamoDB, Scan operations are always eventually consistent.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/APISummary.html>

NEW QUESTION 7

Regarding Amazon SNS, when you want to subscribe to a topic and receive notifications to your email, in the Protocol drop-down box, you should select .

- A. Email
- B. Message
- C. SMTP
- D. IMAP

Answer: A

Explanation:

In Amazon SNS, when you want to subscribe to a topic and receive notifications to your email, select Email in the Protocol drop-down box. Enter an email address you can use to receive the notification in the Endpoint field.

Reference: <http://docs.aws.amazon.com/sns/latest/dg/SubscribeTopic.html>

NEW QUESTION 8

A user has launched an EC2 instance. However, due to some reason the instance was terminated. If the user wants to find out the reason for termination, where can he find the details?

- A. The user can get information from the AWS console, by checking the Instance description under the State transition reason label
- B. The user can get information from the AWS console, by checking the Instance description under the Instance Termination reason label
- C. The user can get information from the AWS console, by checking the Instance description under the Instance Status Change reason label
- D. It is not possible to find the details after the instance is terminated

Answer: A

Explanation:

An EC2 instance, once terminated, may be available in the AWS console for a while after termination. The user can find the details about the termination from the description tab under the label State transition reason. If the instance is still running, there will be no reason listed. If the user has explicitly stopped or terminated the instance, the reason will be "User initiated shutdown".

Reference: http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/Using_InstanceStraightToTerminated.html

NEW QUESTION 9

is a task coordination and state management service for cloud applications.

- A. Amazon SES
- B. Amazon SWF
- C. Amazon FPS
- D. Amazon SNS

Answer: B

Explanation:

Amazon Simple Workflow (Amazon SWF) is a task coordination and state management service for cloud applications. With Amazon SWF, you can stop writing complex glue-code and state machinery and invest more in the business logic that makes your applications unique.

Reference: <http://aws.amazon.com/swf/>

NEW QUESTION 10

A user is planning to create a structured database in the cloud. Which of the below mentioned AWS offerings help the user achieve the goal?

- A. AWS DynamoDB
- B. AWS RDS
- C. AWS SimpleDB
- D. AWS RSD

Answer: B

Explanation:

AWS RDS is a managed database server offered by AWS, which makes it easy to set up, operate, and scale a relational database or structured data in cloud.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 10

A user is planning to host a scalable dynamic web application on AWS. Which of the services may not be required by the user to achieve automated scalability?

- A. CloudWatch
- B. S3
- C. AutoScaling
- D. AWS EC2 instances

Answer: B

Explanation:

The user can achieve automated scaling by launching different EC2 instances and making them a part of an ELB. Cloudwatch will be used to monitor the resources and based on the scaling need it will trigger policies. AutoScaling is then used to scale up or down the instances.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/WhatIsAutoScaling.html>

NEW QUESTION 12

A user plans to use RDS as a managed DB platform. Which of the below mentioned features is not supported by RDS?

- A. Automated backup
- B. Automated scaling to manage a higher load
- C. Automated failure detection and recovery
- D. Automated software patching

Answer: B

Explanation:

AWS RDS provides a managed DB platform, which offers features, such as automated backup, patch management, automated failure detection and recovery. The scaling is not automated and the user needs to plan it with a few clicks.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 16

A user has not enabled versioning on an S3 bucket. What will be the version ID of the object inside that bucket?

- A. There will be no version attached
- B. Null
- C. Blank

Answer: C

Explanation:

S3 objects stored in the bucket before the user has set the versioning state have a version ID of null. When the user enables versioning, the objects in the bucket do not change and their ID remains null. Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/AddingObjectstoVersionSuspendedBuckets.html>

NEW QUESTION 20

A user has created a queue named "myqueue" with SQS. There are four messages published to queue which are not received by the consumer yet. If the user tries to delete the queue, what will happen?

- A. A user can never delete a queue manually
- B. AWS deletes it after 30 days of inactivity on queue
- C. It will initiate the delete but wait for four days before deleting until all messages are deleted automatically.
- D. It will ask user to delete the messages first
- E. It will delete the queue

Answer: D

Explanation:

SQS allows the user to move data between distributed components of applications so they can perform different tasks without losing messages or requiring each component to be always available. The user can delete a queue at any time, whether it is empty or not. It is important to note that queues retain messages for a set period of time. By default, a queue retains messages for four days. Reference:

<http://docs.aws.amazon.com/AWSSimpleQueueService/latest/SQSDeveloperGuide/SQSConcepts.html>

NEW QUESTION 25

In relation to Amazon SQS, how can you ensure that messages are delivered in order?

- A. Increase the size of your queue
- B. Send them with a timestamp
- C. Give each message a unique id.
- D. AWS cannot guarantee that you will receive messages in the exact order you sent them

Answer: D

Explanation:

Amazon SQS makes a best effort to preserve order in messages, but due to the distributed nature of the queue, AWS cannot guarantee that you will receive messages in the exact order you sent them. You typically place sequencing information or timestamps in your messages so that you can reorder them upon receipt.

Reference: <https://aws.amazon.com/items/1343?external|D=1343>

NEW QUESTION 29

An orgAMzation has launched two applications: one for blogging and one for ECM on the same AWS Linux EC2 instance running in the AWS VPC. The orgAMzation has attached two private IPs (primary and secondary) to the above mentioned instance. The orgAMzation wants the instance OS to recognize the secondary IP address. How can the orgAMzation configure this?

- A. Use the ec2-net-utility package which updates routing tables, uses DHCP to refresh the secondary IP and adds the network interface.
- B. Use the ec2-net-utils package which will configure an additional network interface and update the routing table
- C. Use the ec2-ip-update package which can configure the network interface as well as update the secondary IP with DHCP.
- D. Use the ec2-ip-utility package which can update the routing tables as well as refresh the secondary IP using DHCP.

Answer: B

Explanation:

A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. It enables the user to launch AWS resources into a virtual network that the user has defined. With VPC the user can specify multiple private IP addresses for his instances. The number of network interfaces and private IP addresses that a user can specify for an instance depends on the instance type. This scenario helps when the user wants to host multiple websites on a single EC2 instance. After the user has assigned a secondary private IP address to his instance, he needs to configure the operating system on that instance to recognize the secondary private IP address. For AWS Linux, the ec2-net-utils package can take care of this step. It configures additional network interfaces that the user can attach while the instance is running, refreshes secondary IP addresses during DHCP lease renewal, and updates the related routing rules.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/MultipleIP.html>

NEW QUESTION 33

What kind of service is provided by AWS DynamoDB?

- A. Relational Database
- B. NoSQL Database
- C. Dynamic Database
- D. Document Database

Answer: B

Explanation:

DynamoDB is a fast, fully managed NoSQL database service. Reference: <http://aws.amazon.com/dynamodb/>

NEW QUESTION 36

In Amazon SNS, to send push notifications to mobile devices using Amazon SNS and ADM, you need to obtain the following, except:

- A. Client secret
- B. Client ID
- C. Device token
- D. Registration ID

Answer: C

Explanation:

To send push notifications to mobile devices using Amazon SNS and ADM, you need to obtain the following: Registration ID and Client secret.

Reference: <http://docs.aws.amazon.com/sns/latest/dg/SNSMobilePushPrereq.html>

NEW QUESTION 40

Regarding Amazon SNS, to begin using Amazon SNS mobile push notifications, you first need that uses one of the supported push notification services: APNS, GCM, or ADM.

- A. an access policy for the mobile endpoints
- B. to active push notification service of Amazon SNS
- C. to know the type of mobile device operating system
- D. an app for the mobile endpoints

Answer: D

Explanation:

In Amazon SNS, to begin using Amazon SNS mobile push notifications, you first need an app for the mobile endpoints that uses one of the supported push notification services: APNS, GCM, or ADM. After you've registered and configured the app to use one of these services, you configure Amazon SNS to send push notifications to the mobile endpoints.

Reference: <http://docs.aws.amazon.com/sns/latest/dg/SNSMobilePush.html>

NEW QUESTION 43

ExamKiller (with AWS account ID H1122223333) has created 50 IAM users for its organization's employees. ExamKiller wants to make the AWS console login URL for all IAM users as: `https://examkiller.signin.aws.amazon.com/console/`. How can this be configured?

- A. Create a bucket with the name ExamKiller and map it with the IAM alias
- B. It is not possible to have capital letters as a part of the alias name
- C. The user needs to use Route 53 to map the ExamKiller domain and IAM URL
- D. For the AWS account, create an alias ExamKiller for the IAM login

Answer: B

Explanation:

If a user wants the URL of the AWS IAM sign-in page to have the company name instead of the AWS account ID, he can create an alias for his AWS account ID. The alias must be unique across all Amazon WebServices products and contain only digits, lowercase letters, and hyphens.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/AccountAlias.html>

NEW QUESTION 44

Can a user get a notification of each instance start / terminate configured with Auto Scaling?

- A. Yes, always
- B. No
- C. Yes, if configured with the Auto Scaling group
- D. Yes, if configured with the Launch Config

Answer: C

Explanation:

The user can get notifications using SNS if he has configured the notifications while creating the Auto Scaling group.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/GettingStartedTutorial.html>

NEW QUESTION 49

In regard to DynamoDB, can I delete local secondary indexes?

- A. Yes, if it is a primary hash key index
- B. No
- C. Yes, if it is a local secondary indexes
- D. Yes, if it is a Global secondary indexes

Answer: B

Explanation:

In DynamoDB, an index cannot be modified once it is created. Reference: http://aws.amazon.com/dynamodb/faqs/#security_anchor

NEW QUESTION 53

Does AWS CloudFormation support Amazon EC2 tagging?

- A. It depends if the Amazon EC2 tagging has been defined in the template.
- B. No, it doesn't support Amazon EC2 tagging.
- C. No, CloudFormation doesn't support any tagging
- D. Yes, AWS CloudFormation supports Amazon EC2 tagging

Answer: D

Explanation:

In AWS CloudFormation, Amazon EC2 resources that support the tagging feature can also be tagged in an AWS template. The tag values can refer to template parameters, other resource names, resource attribute values (e.g. addresses), or values computed by simple functions (e.g., a concatenated list of strings).

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 54

How long are the messages kept on an SQS queue by default?

- A. If a message is not read, it is never deleted
- B. 2 weeks
- C. 1 day
- D. 4 days

Answer: D

Explanation:

The SQS message retention period is configurable and can be set anywhere from 1 minute to 2 weeks. The default is 4 days and once the message retention limit is reached your messages will be automatically deleted. The option for longer message retention provides greater flexibility to allow for longer intervals between message production and consumption.

Reference: <https://aws.amazon.com/sqs/faqs/>

NEW QUESTION 55

Regarding Amazon SWF, the coordination logic in a workflow is contained in a software program called a

- A. Handler
- B. Decider
- C. Coordinator
- D. Worker

Answer: B

Explanation:

In Amazon SWF, the coordination logic in a workflow is contained in a software program called a decider. The decider schedules actMty tasks, provides input data to the actMty workers, processes events that arrive while the workflow is in progress, and ultimately ends (or closes) the workflow when the objective has been completed.

Reference: <http://docs.aws.amazon.com/amazonswf/latest/developerguide/swf-dg-intro-to-swf.html>

NEW QUESTION 60

When should a user try to Force Detach an EBS volume?

- A. If the volume is stuck in a detaching state
- B. If the volume is not accessible from the instance
- C. If the volume is not unmounted and the user still wants to detach
- D. If the volume is a root volume

Answer: A

Explanation:

If an EBS volume stays in the detaching state, the user can force the detachment by clicking Force Detach. Forcing the detachment can lead to either data loss or a corrupted file system. The user should use this option only as a last resort to detach a volume from a failed instance or if he is detaching a volume with the intention of deleting it.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-detaching-volume.html>

NEW QUESTION 63

How can a user configure three termination policies for the AutoScaling group?

- A. Define multiple policies in random order
- B. Define multiple policies in the ordered list
- C. Keep updating the AutoScaling group with each policy
- D. The user cannot specify more than two policies for AutoScaling

Answer: B

Explanation:

To configure the Auto Scaling termination policy, the user can either specify any one of the policies as a standalone policy or list multiple policies in an ordered list. The policies are executed in the order that they are listed.

Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/us-termination-policy.html>

NEW QUESTION 67

A user wants to configure AutoScaling which scales up when the CPU utilization is above 70% and scales down when the CPU utilization is below 30%. How can the user configure AutoScaling for the above mentioned condition?

- A. Use AutoScaling with a schedule
- B. Configure ELB to notify AutoScaling on load increase or decrease
- C. Use dynamic AutoScaling with a policy
- D. Use AutoScaling by manually modifying the desired capacity during a condition

Answer: C

Explanation:

The user can configure the AutoScaling group to automatically scale up and then scale down based on the specified conditions. To configure this, the user must setup policies which will get triggered by the C|oudWatch alarms.

Reference:

<http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/as-scale-based-on-demand.html>

NEW QUESTION 70

Can you configure an RDS Read Replica using CloudFormation templates?

- A. Yes, provided that you have root access.
- B. Yes, when you create a new CloudFormation template
- C. Yes, but not for all Regions.
- D. No, you can add the ReadReplica only when the resource is made available by CloudFormation

Answer: B

Explanation:

AWS CloudFormation gives developers and systems administrators an easy way to create and manage collections of AWS resources. You can now set Read Replicas for your databases with RDS when you create a new C|oudFormation template.You can start using it with the sample template of C|oudFormation.

Reference:

https://s3.amazonaws.com/cloudformation-templates-us-east-1/RDS_MySQL_With_Read_Replica.template

NEW QUESTION 72

An account owner has created an IAM user with the name examkiller. The account owner wants to give EC2 access of only the US West region to that IAM user. How can the owner configure this?

- A. While creating a policy provide the region as a part of the resources
- B. Create an IAM user in the US West region and give access to EC2
- C. Create an IAM policy and define the region in the condition
- D. It is not possible to provide access based on the region

Answer: C

Explanation:

The IAM policy is never region specific. If the user wants to configure the region specific setting, he needs to provide conditions as part of the policy.

Reference: <http://awspolicygen.s3.amazonaws.com/policygen.html>

NEW QUESTION 76

What is the maximum time messages can be stored in SQS?

- A. 14 days
- B. one month
- C. 4 days
- D. 7 days

Answer: A

Explanation:

A message can be stored in the Simple Queue Service (SQS) from 1 minute up to a maximum of 14 days. Reference:

http://aws.amazon.com/sqs/faqs/#How_long_can_I_keep_my_messages_in_Amazon_SQS_queues

NEW QUESTION 80

A user has launched an EBS backed Linux instance. How can a user detach the root device and attach it to another instance as a secondary volume?

- A. Unmount the root volume first and then detach it
- B. It is not possible to mount the root volume to some other instance
- C. Stop the first instance and then attach instance's root volume as a new volume to the other instance
- D. It is not possible to mount the root device as a secondary volume on the other instance

Answer: C

Explanation:

If an Amazon EBS volume is the root device of an instance, it cannot be detached unless the instance is in the stopped state.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-detaching-volume.html>

NEW QUESTION 81

A user has launched one EC2 instance in the US West region. The user wants to access the RDS instance launched in the US East region from that EC2 instance. How can the user configure the access for that EC2 instance?

- A. It is not possible to access RDS of the US East region from the US West region
- B. Open the security group of the US West region in the RDS security group's ingress rule
- C. Configure the IP range of the US West region instance as the ingress security rule of RDS
- D. Create an IAM role which has access to RDS and launch an instance in the US West region with it

Answer: C

Explanation:

The user cannot authorize an Amazon EC2 security group if it is in a different AWS Region than the RDS DB instance. The user can authorize an IP range or specify an Amazon EC2 security group in the same region that refers to an IP address in another region.

Reference: http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/USER_WorkingWithSecurityGroups.html

NEW QUESTION 84

In regard to DynamoDB, what is the Global secondary index?

- A. An index with a hash and range key that can be different from those on the table.
- B. An index that has the same range key as the table, but a different hash key
- C. An index that has the same hash key and range key as the table
- D. An index that has the same hash key as the table, but a different range key

Answer: A

Explanation:

Global secondary index - an index with a hash and range key that can be different from those on the table.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/DataModel.html>

NEW QUESTION 86

Which of the below mentioned options is not a best practice to securely manage the AWS access credentials?

- A. Enable MFA for prMleged users
- B. Create indMdual IAM users
- C. Keep rotating your secure access credentials at regular intervals
- D. Create strong access key and secret access key and attach to the root account

Answer: D

Explanation:

It is a recommended approach to avoid using the access and secret access keys of the root account.

Thus, do not download or delete it. Instead make the IAM user as powerful as the root account and use its credentials. The user cannot generate their own access and secret access keys as they are always generated by AWS.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/IAMBestPractices.html>

NEW QUESTION 87

In DynamoDB, a secondary index is a data structure that contains a subset of attributes from a table, along with an alternate key to support operations.

- A. None of the above
- B. Both
- C. Query
- D. Scan

Answer: C

Explanation:

In DynamoDB, a secondary index is a data structure that contains a subset of attributes from a table, along with an alternate key to support Query operations.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/SecondaryIndexes.html>

NEW QUESTION 90

A user is trying to understand AWS SNS. To which of the below mentioned end points is SNS unable to send a notification?

- A. AWS SES
- B. Email JSON
- C. AWS SQS
- D. HTTP

Answer: A

Explanation:

Amazon Simple Notification Service (Amazon SNS) is a fast, filexible, and fully managed push messaging service. Amazon SNS can deliver notifications by SMS text message or email to the Amazon Simple Queue Service (SQS) queues or to any HTTP endpoint. The user can select one the following transports as part of the subscription requests: "HTTP", "HTTPS", "Email", "Email-JSON", "SQS", "and SMS".

Reference: <http://aws.amazon.com/sns/faqs/>

NEW QUESTION 94

Bob is an IAM user who has access to the EC2 services. Admin is an IAM user who has access to all the AWS services including IAM. Can Bob change his password?

- A. No, the IAM user can never change the password
- B. Yes, provided Admin has given Bob access to change his password
- C. Yes, only from AWS CLI
- D. Yes, only from the AWS console

Answer: B

Explanation:

The IAM users by default cannot change their password. The root owner or IAM administrator needs to set the policy in the password policy page, which should allow the user to change their password. Once it is enabled, the IAM user can always change their passwords from the AWS console or CLI.

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_ManagingUserPwdSelf.htm

NEW QUESTION 98

A user has created photo editing software and hosted it on EC2. The software accepts requests from the user about the photo format and resolution and sends a message to S3 to enhance the picture accordingly. Which of the below mentioned AWS services will help make a scalable software with the AWS infrastructure in this scenario?

- A. AWS Elastic Transcoder
- B. AWS Simple Notification Service
- C. AWS Simple Queue Service
- D. AWS Glacier

Answer: C

Explanation:

Amazon Simple Queue Service (SQS) is a fast, reliable, scalable, and fully managed message queuing service. SQS provides a simple and cost-effective way to decouple the components of an application. The user can configure SQS, which will decouple the call between the EC2 application and S3. Thus, the application does not keep waiting for S3 to provide the data.

Reference: <http://aws.amazon.com/sqs/faqs/>

NEW QUESTION 102

A user has created a blank EBS volume in the US-East-1 region. The user is unable to attach the volume to a running instance in the same region. What could be the possible reason for this?

- A. The instance must be in a running stat
- B. It is required to stop the instance to attach volume
- C. The AZ for the instance and volume are different
- D. The instance is from an instance store backed AMI
- E. The instance has enabled the volume attach protection

Answer: B

Explanation:

An EBS volume provides persistent data storage. The user can attach a volume to any instance provided they are both in the same AZ. Even if they are in the same region but in a different AZ, it will not be able to attach the volume to that instance.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/AmazonEBS.html>

NEW QUESTION 106

An orgAMzation is setting up their website on AWS. The orgAMzation is working on various security measures to be performed on the AWS EC2 instances. Which of the below mentioned security mechAMsms will not help the orgAMzation to avoid future data leaks and identify security weaknesses?

- A. Perform SQL injection for application testing.
- B. Run penetration testing on AWS with prior approval from Amazon.
- C. Perform a hardening test on the AWS instance.
- D. Perform a Code Check for any memory leak

Answer: D

Explanation:

AWS security follows the shared security model where the user is as much responsible as Amazon. Since Amazon is a public cloud it is bound to be targeted by hackers. If an orgAMzation is planning to host their application on AWS EC2, they should perform the below mentioned security checks as a measure to find any security weakness/data leaks:

Perform penetration testing as performed by attackers to find any vulnerability. The orgAMzation must take an approval from AWS before performing penetration testing

Perform hardening testing to find if there are any unnecessary ports open Perform SQL injection to find any DB security issues

The code memory checks are generally useful when the orgAMzation wants to improve the application performance.

Reference: <http://aws.amazon.com/security/penetration-testing/>

NEW QUESTION 109

Regarding Amazon SQS, what happens if there is no actMty against a queue for more than 30 consecutive days?

- A. Your account will be suspended
- B. The queue may be deleted
- C. Nothing
- D. The queue will be deleted

Answer: B

Explanation:

AWS reserve the right to delete a queue if none of the following requests have been issued against the queue for more than 30 consecutive days:

SendMessage ReceiveMessage DeleteMessage GetQueueAttributes SetQueueAttributes

You should design your application with this in mind. Reference: <https://aws.amazon.com/sqs/faqs/>

NEW QUESTION 112

Which of the below mentioned commands allows the user to share the AMI with his peers using the AWS EC2 CLI?

- A. ec2-share-image-public
- B. ec2-share-image-account
- C. ec2-share-image
- D. ec2-modify-image-attribute

Answer: D

Explanation:

A user can share an AMI with another user / peer using the command: ec2-modify-image-attribute

<AMI-ID> -| -a <AWS Account ID>

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/sharingamis-explicit.html>

NEW QUESTION 115

In regards to Amazon SQS how many times will you receive each message?

- A. At least twice
- B. Exactly once
- C. As many times as you want
- D. At least once

Answer: D

Explanation:

Amazon SQS is engineered to provide "at least once" delivery of all messages in its queues. Although most of the time, each message will be delivered to your application exactly once, you should design your system so that processing a message more than once does not create any errors or inconsistencies. Reference: <https://aws.amazon.com/sqs/faqs/>

NEW QUESTION 116

A user is enabling logging on a particular bucket. Which of the below mentioned options may be best suitable to allow access to the log bucket?

- A. Create an IAM policy and allow log access
- B. It is not possible to enable logging on the S3 bucket
- C. Create an IAM Role which has access to the log bucket
- D. Provide ACL for the logging group

Answer: D

Explanation:

The only recommended use case for the S3 bucket ACL is to grant the write permission to the Amazon S3 Log Delivery group to write access log objects to the user's bucket.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/access-policy-alternatives-guidelines.html>

NEW QUESTION 119

A user has setup Multi AZ with the MS SQL RDS instance. Which of the below mentioned functionalities can be achieved by the user?

- A. High availability
- B. Scalability
- C. MS SQL does not support Multi AZ
- D. Disaster recovery

Answer: C

Explanation:

The Multi AZ feature allows the user to achieve High Availability. MS SQL does not support Multi AZ. Reference: <https://aws.amazon.com/rds/faqs/#36>

NEW QUESTION 124

A user has created an EBS instance in the US-East-1a AZ. The user has a volume of 30 GB in the US-East-1 b zone. How can the user attach the volume to an instance?

- A. Since both the volume and the instance are in the same region, the user can attach the volume
- B. Use the volume migrate function to move the volume from one AZ to another and attach to the instance
- C. Take a snapshot of the volum
- D. Create a new volume in the USEast-1a and attach that to the instance
- E. Use the volume replicate function to create a new volume in the US-East-1a and attach that to the volume

Answer: C

Explanation:

If an EBS volume is not in the same AZ of an EC2 instance, it cannot be attached to the instance. The only option is to take a snapshot of the volume and create a new volume in the instance's AZ. Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/EBSSnapshots.html>

NEW QUESTION 129

A user has created an RDS instance with MySQL. The user is using the HeidiSQL client to connect with the RDS DB. The client is unable to connect to DB from his home machine. What is a possible reason for the failure?

- A. The user has to open port 80 in the RDS security group to connect with RDS DNS
- B. The security group is not configured to allow a request from the user's IP on port 3306
- C. You can never connect to RDS from your desktop
- D. The user has to open port 22 in the RDS security group to connect with RDS DNS

Answer: B

Explanation:

If the user needs to connect to RDS then he has to open port 3306 in the RDS security group for his IP address.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 132

A user is creating a new EBS volume from an existing snapshot. The snapshot size shows 10 GB. Can the user create a volume of 30 GB from that snapshot?

- A. Provided the original volume has set the change size attribute to true
- B. Yes
- C. Provided the snapshot has the modify size attribute set as true
- D. No

Answer: B

Explanation:

A user can always create a new EBS volume of a higher size than the original snapshot size. The user cannot create a volume of a lower size. When the new volume is created the size in the instance will be shown as the original size. The user needs to change the size of the device with `resize2fs` or other OS specific

commands.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/ebs-expand-volume.html>

NEW QUESTION 136

An orgAMzation has 10000 employees. The orgAMzation wants to give restricted AWS access to each employee. How can the orgAMzation achieve this?

- A. Create an IAM user for each employee and make them a part of the group
- B. It is not recommended to support 10000 users with IAM
- C. Use STS and create the users' run time
- D. Use Identity federation with SSO

Answer: D

Explanation:

Identity federation enables users from an existing directory to access resources within your AWS account, making it easier to manage your users by maintaining their identities in a single place. In this case, the federated user is the only solution since AWS does not allow creating more than 5000 IAM users. Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/LimitationsOnEntities.html>

NEW QUESTION 138

Can a user associate and use his own DNS with ELB instead of the DNS provided by AWS ELB?

- A. Yes, by creating a CNAME with the existing domain name provider
- B. Yes, by configuring DNS in the AWS Console
- C. No
- D. Yes, only through Route 53 by mapping ELB and DNS

Answer: A

Explanation:

The AWS ELB allows mapping a custom domain name with ELB. The user can map ELB with DNS in two ways: 1) By creating CNAME with the existing domain name service provider or 2) By creating a record with Route 53.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/using-domain-names-with-elb.html>

NEW QUESTION 142

can be used to bootstrap both the Chef Server and Chef Client software on your EC2 instances.

- A. AWS CloudFormation
- B. AWS Elastic Beanstalk
- C. AWS OpsWorks
- D. Amazon Glacier

Answer: A

Explanation:

AWS CloudFormation can be used to bootstrap both the Chef Server and Chef Client software on your EC2 instances.

Reference: <http://aws.amazon.com/cloudformation/faqs/>

NEW QUESTION 146

Which of the below mentioned options can be a good use case for storing content in AWS RRS?

- A. Storing mission critical data Files
- B. Storing infrequently used log files
- C. Storing a video file which is not reproducible
- D. Storing image thumbnails

Answer: D

Explanation:

AWS RRS provides the same functionality as AWS S3, but at a cheaper rate. It is ideally suited for non-mission, critical applications, such as files which can be reproduced.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/UsingRRS.html>

NEW QUESTION 149

A user is trying to create a policy for an IAM user from the AWS console. Which of the below mentioned options is not available to the user while configuring policy?

- A. Use policy generator to create policy
- B. Use custom policy to create policy
- C. Use policy simulator to create policy
- D. Assign No permission

Answer: C

Explanation:

When a user is trying to create a policy from the AWS console, it will have options such as create policy from templates or use a policy generator. The user can also define a custom policy or chose the option to have no permission. The policy simulator is not available in the console.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/IAMBestPractices.html>

NEW QUESTION 151

A user has an S3 object in the US Standard region with the content "color=red". The user updates the object with the content as "color=white". If the user tries to read the value 1 minute after it was uploaded, what will S3 return?

- A. It will return "color=white"
- B. It will return "color=red"
- C. It will return an error saying that the object was not found
- D. It may return either "color=red" or "color=white" i.
- E. any of the value

Answer: D

Explanation:

AWS S3 follows the eventual consistent model in the US Standard Region. Once the object is updated it may return the new value or the old value based on whether all the content is replicated across multiple servers until it becomes consistent (eventual).
Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/Introduction.html>

NEW QUESTION 152

A user is planning to use EBS for his DB requirement. The user already has an EC2 instance running in the VPC private subnet. How can the user attach the EBS volume to a running instance?

- A. The user must create EBS within the same VPC and then attach it to a running instance.
- B. The user can create EBS in the same zone as the subnet of instance and attach that EBS to instance.
- C. It is not possible to attach an EBS to an instance running in VPC until the instance is stopped.
- D. The user can specify the same subnet while creating EBS and then attach it to a running instance

Answer: B

Explanation:

A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. The user can create subnets as per the requirement within a VPC. The VPC is always specific to a region. The user can create a VPC which can span multiple Availability Zones by adding one or more subnets in each Availability Zone. The instance launched will always be in the same availability zone of the respective subnet. When creating an EBS the user cannot specify the subnet or VPC. However, the user must create the EBS in the same zone as the instance so that it can attach the EBS volume to the running instance.
Reference: [#VPCSubnet](http://docs.aws.amazon.com/AmazonVPC/latest/UserGuide/VPC_Subnets.htm)

NEW QUESTION 154

Your manager has requested you to tag EC2 instances to orgAMze and manage a load balancer. Which of the following statements about tag restrictions is incorrect?

- A. The maximum key length is 127 Unicode characters.
- B. The maximum value length is 255 Unicode characters.
- C. Tag keys and values are case sensitive.
- D. The maximum number of tags per load balancer is 20.

Answer: D

Explanation:

Tags help you to categorize your load balancers in different ways, for example, by purpose, owner, or environment. The following basic restrictions apply to tags:
The maximum number of tags per resource is 10.
The maximum key length is 127 Unicode characters. The maximum value length that can be used is 255 Unicode characters. The tag keys and values are case sensitive. Allowed characters are letters, spaces, and numbers representable in UTF-8, plus the following special characters: + - =. _ : / @. Do not use leading or trailing spaces. Do not use the aws: prefix in your tag names or values because it is reserved for AWS use. You can't edit or delete tag names or values with this prefix. Tags with this prefix do not count against your tags per resource limit.
Reference:
<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/add-remove-tags.html#tag-restrictions>

NEW QUESTION 158

What is the maximum number of tags that a user can assign to an EC2 instance?

- A. 50
- B. 10
- C. 5
- D. 25

Answer: B

Explanation:

To help manage EC2 instances as well as their usage in a better way, the user can tag the instances. The tags are metadata assigned by the user which consists of a key and a value. One resource can have a maximum of 10 tags.
Reference: http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/Using_Tags.html

NEW QUESTION 162

How do you configure SQS to support longer message retention?

- A. Set the IVmessageRetentionPeriod attribute using the SetQueueAttributes method
- B. Using a Lambda function

- C. You can'
- D. It is set to 14 days and cannot be changed
- E. You need to request it from AWS

Answer: A

Explanation:

To configure the message retention period, set the `IVessageRetentionPeriod` attribute using the `SetQueueAttributes` method. This attribute is used to specify the number of seconds a message will be retained by SQS. Currently the default value for the message retention period is 4 days. Using the `IVessageRetentionPeriod` attribute, the message retention period can be set anywhere from 60 seconds (1 minute), up to 1209600 seconds (14 days).
Reference: <https://aws.amazon.com/sqs/faqs/>

NEW QUESTION 167

The user has created multiple AutoScaling groups. The user is trying to create a new AS group but it fails. How can the user know that he has reached the AS group limit specified by AutoScaling in that region?

- A. Run the command: `as-describe-account-limits`
- B. Run the command: `as-describe-group-limits`
- C. Run the command: `as-max-account-limits`
- D. Run the command: `as-list-account-limits`

Answer: A

Explanation:

A user can see the number of AutoScaling resources currently allowed for the AWS account either by using the `as-describe-account-limits` command or by calling the `DescribeAccountLimits` action. Reference: <http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/ts-as-capacity.html>

NEW QUESTION 172

An orgAMzation is hosting an application as part of the free usage tier. The orgAMzation wants to create IAM users for each of its 150 employees and they may access AWS as part of free usage tier. What will you advise the orgAMzation?

- A. The IAM is not available as a part of the free usage tier
- B. Create IAM roles and give access based on role since it will not cost the user
- C. Do not create more than 100 users as it will cost the orgAMzation.
- D. Create IAM users for each employee as it does not cost

Answer: D

Explanation:

IAM is a free service. You can create as many IAM users or groups as desired free of cost. Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/IAM_Introduction.htm

NEW QUESTION 177

A user has enabled serverside encryption with S3. The user downloads the encrypted object from S3. How can the user decrypt it?

- A. S3 does not support server side encryption
- B. S3 provides a server side key to decrypt the object
- C. The user needs to decrypt the object using their own private key
- D. S3 manages encryption and decryption automatically

Answer: D

Explanation:

If the user is using the server-side encryption feature, Amazon S3 encrypts the object data before saving it on disks in its data centres and decrypts it when the user downloads the objects. Thus, the user is free from the tasks of managing encryption, encryption keys, and related tools.
Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/UsingEncryption.html>

NEW QUESTION 180

A user has configured ELB with two instances running in separate AZs of the same region? Which of the below mentioned statements is true?

- A. Nlulti AZ instances will provide HA with ELB
- B. IVlulti AZ instances are not possible with a single ELB
- C. Nlulti AZ instances will provide scalability with ELB
- D. The user can achieve both HA and scalability with ELB

Answer: A

Explanation:

If a user is running two instances in separate AZs, it will provide HA with ELB since ELB will automatically stop routing the traffic to unhealthy instances and send it to healthy instances only.

NEW QUESTION 181

A user is trying to configure access with S3. Which of the following options is not possible to provide access to the S3 bucket / object?

- A. Define the policy for the IAM user
- B. Define the ACL for the object
- C. Define the policy for the object

D. Define the policy for the bucket

Answer: C

Explanation:

Amazon S3 offers access policy options broadly categorized as resource-based policies and user policies.

Access policies, such as ACL and resource policy can be attached to the bucket. With the object the user can only have ACL and not an object policy. The user can also attach access policies to the IAM users in the account. These are called user policies.

Reference: <http://docs.aws.amazon.com/AmazonS3/latest/dev/s3-access-control.html>

NEW QUESTION 185

An orgAMzation has enabled a strict password policy for its IAM users. The orgAMzation is taking help from the IAM console to set the password policy. Which of the below mentioned rules cannot be specified by the user as a part of the policy?

- A. Allow at least one lower case letter
- B. Allow at least one number
- C. Allow at least one non-alphanumeric character
- D. Do not allow the user to use the password from the last three passwords

Answer: D

Explanation:

AWS IAM allows an orgAMzation to create multiple users and provide them access to various AWS services. By default when the user is created, he does not have password enabled and can not login to AWS console. If the orgAMzation wants to allow the users to login to AWS console, they can enable password for each user. It is required that IAM users follow certain guidelines to set their IAM login password. For this IAM provides root account owner to setup password policy. The password policy also lets the specify whether all IAM users can change their own passwords. As part of policy, orgAMzation can specify that passwords for IAM users must be of a certain minimum length, must include certain characters, and a few more criteria such as below.

One upper/ lower or both letters One alpha numeric

One number

Reference: http://docs.aws.amazon.com/IAM/latest/UserGuide/Using_ManagingPasswordPolicies.htm

NEW QUESTION 190

In regard to DynamoDB, can I modify the index once it is created?

- A. Yes, if it is a primary hash key index
- B. Yes, if it is a Global secondary index
- C. No
- D. Yes, if it is a local secondary index

Answer: C

Explanation:

Currently, in DynamoDB, an index cannot be modified once it is created. Reference: http://aws.amazon.com/dynamodb/faqs/#security_anchor

NEW QUESTION 192

ExamKiller (with AWS account ID 111122223333) has created 50 IAM users for its orgAMzation's employees. What will be the AWS console URL for these associates?

- A. [https:// 111122223333.signin.aws.amazon.com/console/](https://111122223333.signin.aws.amazon.com/console/)
- B. [https:// signin.aws.amazon.com/console/](https://signin.aws.amazon.com/console/)
- C. <https://signin.aws.amazon.com/111122223333/console/>
- D. <https://signin.aws.amazon.com/console/111122223333/>

Answer: A

Explanation:

When an orgAMzation is using AWS IAM for creating various users and manage their access rights, the IAM user cannot use the login URL

<http://aws.amazon.com/console> to access AWS management console. The console login URL for the IAM user will have AWS account ID of that orgAMzation to identify the IAM user belongs to particular account. The AWS console login URL for the IAM user will be [https://](https://<AWS_Account_ID>.signin.aws.amazon.com/console/)

<AWS_Account_ID>.signin.aws.amazon.com/console/. In this case it will be [https:// 111122223333.signin.aws.amazon.com/console/](https://111122223333.signin.aws.amazon.com/console/)

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/AccountAlias.html>

NEW QUESTION 196

The user has configured AutoScaling based on the dynamic policy. Which of the following is not the right command to specify a change in capacity as a part of the policy?

- A. "adjustment=-50" (type is PercentChangeInCapacity)
- B. "adjustment=3" (type is ExactCapacity)
- C. "adjustment=-1" (type is ChangeInCapacity)
- D. "adjustment=-8" (type is ExactCapacity)

Answer: D

Explanation:

The user can configure the AutoScaling group to automatically scale up and then scale down based on the various specified CloudWatch monitoring conditions.

The user needs to provide the adjustment value and the adjustment type. A positive adjustment value increases the current capacity and a negative adjustment value decreases the current capacity. The user can express the change to the current size as an absolute number, an increment or as a percentage of the current group size.

In this option specifying the exact capacity with the adjustment value = -8 will not work as when type is exact capacity the adjustment value cannot be negative.

Reference:

<http://docs.aws.amazon.com/AutoScaling/latest/DeveloperGuide/as-scale-based-on-demand.html>

NEW QUESTION 199

Which of the following solutions is not supported by DynamoDB:

- A. Hash secondary index
- B. Local secondary index
- C. Hash Primary Key
- D. Global secondary index

Answer: A

Explanation:

In DynamoDB, a secondary index is a data structure that contains a subset of attributes from a table, along with an alternate key to support Query operations.

DynamoDB supports the following two types of secondary indexes:

Local secondary index is an index that has the same hash key as the table, but a different range key. A local secondary index is "local" in the sense that every partition of a local secondary index is scoped to a table partition that has the same hash key.

Global secondary index is an index with a hash and range key that can be different from those on the table. A global secondary index is considered "global" because queries on the index can span all of the data in a table, across all partitions.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/DataModel.html>

NEW QUESTION 202

The AWS console for DynamoDB enables you to do all the following operations, except:

- A. Set up alarms to monitor your table's capacity usage.
- B. Create, update, and delete tables.
- C. Import Data from other databases or from files.
- D. View your table's top monitoring metrics on real-time graphs from CloudWatc

Answer: C

Explanation:

The AWS console for DynamoDB enables you to do all the above operation but not Importing Data from other databases or from files and it is not possible to do it.

Reference: <http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/ConsoleDynamoDB.html>

NEW QUESTION 203

An orgAMzation has created multiple components of a single application for compartmentalization. Currently all the components are hosted on a single EC2 instance. Due to security reasons the orgAMzation wants to implement two separate SSLs for the separate modules although it is already using VPC. How can the orgAMzation achieve this with a single instance?

- A. Create a VPC instance which will have both the ACL and the security group attached to it and have separate rules for each IP address.
- B. Create a VPC instance which will have multiple network interfaces with multiple elastic IP addresses.
- C. You have to launch two instances each in a separate subnet and allow VPC peering for a single IP.
- D. Create a VPC instance which will have multiple subnets attached to it and each will have a separate IP address.

Answer: B

Explanation:

A Virtual Private Cloud (VPC) is a virtual network dedicated to the user's AWS account. It enables the user to launch AWS resources into a virtual network that the user has defined. With VPC the user can specify multiple private IP addresses for his instances.

The number of network interfaces and private IP addresses that a user can specify for an instance depends on the instance type. With each network interface the orgAMzation can assign an EIP. This scenario helps when the user wants to host multiple websites on a single EC2 instance by using multiple SSL certificates on a single server and associating each certificate with a specific EIP address. It also helps in scenarios for operating network appliances, such as firewalls or load balancers that have multiple private IP addresses for each network interface.

Reference: <http://docs.aws.amazon.com/AWSEC2/latest/UserGuide/MultipleIP.html>

NEW QUESTION 205

A user has hosted a website on AWS and uses ELB to load balance the multiple instances. The user application does not have any cookie management. How can the user bind the session of the requestor with a particular instance?

- A. Bind the IP address with a sticky cookie
- B. Create a cookie at the application level to set at ELB
- C. Use session synchronization with ELB
- D. Let ELB generate a cookie for a specified duration

Answer: D

Explanation:

The key to manage the sticky session is determining how long the load balancer should route the user's request to the same application instance. If the application has its own session cookie, then the user can set the Elastic Load Balancing to create the session cookie to follow the duration specified by the application's session cookie. If the user's application does not have its own session cookie, then he can set the Elastic Load Balancing to create a session cookie by specifying his own stickiness duration. Reference: http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/US_StickySessions.html

NEW QUESTION 210

Your supervisor has asked you to build a simple file synchronization service for your department. He doesn't want to spend too much money and he wants to be notified of any changes to files by email. What do you think would be the best Amazon service to use for the email solution?

- A. Amazon CloudSearch
- B. Amazon Elastic Transcoder
- C. Amazon SES
- D. Amazon AppStream

Answer: C

Explanation:

File change notifications can be sent via email to users following the resource with Amazon Simple Email Service (Amazon SES), an easy-to-use, cost-effective email solution.

Reference: http://media.amazonwebservices.com/architecturecenter/AWS_ac_ra_filesync_08.pdf

NEW QUESTION 214

ExamKiller has three AWS accounts. They have created separate IAM users within each account. ExamKiller wants a single IAM console URL such as <https://examkiller.signin.aws.amazon.com/console/> for all account users. How can this be achieved?

- A. Merge all the accounts with consolidated billing
- B. Create the same account alias with each account ID
- C. It is not possible to have the same IAM account login URL for separate AWS accounts
- D. Create the S3 bucket with an alias name and use the redirect rule to forward requests to various accounts

Answer: C

Explanation:

If a user wants the URL of the AWS IAM sign-in page to have a company name instead of the AWS account ID, he can create an alias for his AWS account ID. The alias should be unique.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/AccountAlias.html>

NEW QUESTION 215

Regarding Amazon SWF, at times you might want to record information in the workflow history of a workflow execution that is specific to your use case. enable you to record information in the workflow execution history that you can use for any custom or scenario-specific purpose.

- A. Markers
- B. Tags
- C. Hash keys
- D. Events

Answer: A

Explanation:

In Amazon SWF, at times you might want to record information in the workflow history of a workflow execution that is specific to your use case. Markers enable you to record information in the workflow execution history that you can use for any custom or scenario-specific purpose.

Reference: <http://docs.aws.amazon.com/amazonswf/latest/developerguide/swf-dg-adv.html>

NEW QUESTION 220

What is the maximum size for messages stored in SQS?

- A. 256KB
- B. 128KB
- C. 1024KB
- D. 64KB

Answer: A

Explanation:

By default, SQS queues allow you to send the largest supported payload size, currently 256KB. You can choose to specify a limit on how many bytes can be sent per payload, using the `MaximumMessageSize` attribute of the `SetQueueAttributes` method.

Reference: <http://aws.amazon.com/sqs/faqs/>

NEW QUESTION 225

A user is planning to host data with RDS. Which of the below mentioned databases is not supported by RDS?

- A. PostgreSQL
- B. SQLDB
- C. Oracle
- D. MS SQL

Answer: B

Explanation:

Amazon Relational Database Service (Amazon RDS) is a web service that makes it easier to set up, operate, and scale a relational database in the cloud. AWS RDS supports popular DBs, such as MySQL, PostgreSQL, MS SQL and Oracle. This means that the code, applications, and tools user is already using with existing databases can be used with Amazon RDS too. In short, it is a managed Relation Database offering from AWS which manages backups, software patching, automatic failure detection, and recovery of Database.

Reference: <http://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/Welcome.html>

NEW QUESTION 230

A root AWS account owner has created three IAM users: Bob, John and Michael. Michael is the IAM administrator. Bob and John are not the superpower users, but users with some pre-defined policies. John does not have access to modify his password. Thus, he asks Bob to change his password. How can Bob change John's password?

- A. This statement is fals
- B. It should be Michael who changes the password for John
- C. It is not possible that John cannot modify his password
- D. Provided Bob is the manager of John
- E. Provided Michael has added Bob to a group, which has permissions to modify the IAM passwords

Answer: D

Explanation:

Generally with IAM users, the password can be modified in two ways. The first option is to define the IAM level policy which allows each user to modify their own passwords. The other option is to create a group and create a policy for the group which can change the passwords of various IAM users.

Reference: <http://docs.aws.amazon.com/IAM/latest/UserGuide/HowToPwDIAMUser.html>

NEW QUESTION 234

Regarding Amazon SNS, to send messages to a queue through a topic, you must subscribe the queue to the Amazon SNS topic. You specify the queue by its .

- A. ARN
- B. Token
- C. Registration ID
- D. URL

Answer: A

Explanation:

In Amazon SNS, to send messages to a queue through a topic, you must subscribe the queue to the Amazon SNS topic. You specify the queue by its ARN.

Reference: <http://docs.aws.amazon.com/sns/latest/dg/SendMessageToSQS.html>

NEW QUESTION 238

A user has configured a website and launched it using the Apache web server on port 80. The user is using ELB with the EC2 instances for Load Balancing. What should the user do to ensure that the EC2 instances accept requests only from ELB?

- A. Open the port for an ELB static IP in the EC2 security group
- B. Configure the security group of EC2, which allows access to the ELB source security group
- C. Configure the EC2 instance so that it only listens on the ELB port
- D. Configure the security group of EC2, which allows access only to the ELB listener

Answer: B

Explanation:

When a user is configuring ELB and registering the EC2 instances with it, ELB will create a source security group. If the user wants to allow traffic only from ELB, he should remove all the rules set for the other requests and open the port only for the ELB source security group.

Reference:

<http://docs.aws.amazon.com/ElasticLoadBalancing/latest/DeveloperGuide/using-elb-security-groups.html>

NEW QUESTION 243

When working with AWS CloudFormation Templates what is the maximum number of stacks that you can create?

- A. 500
- B. 50
- C. 20
- D. 10

Answer: C

Explanation:

CloudFormation Limits

Maximum number of AWS CloudFormation stacks that you can create is 20 stacks. Reference:

<http://docs.aws.amazon.com/AWSCloudFormation/latest/UserGuide/cloudformation-limits.html>

NEW QUESTION 244

Does DynamoDB support in-place atomic updates?

- A. It is not defined
- B. Yes
- C. It does support in-place non-atomic updates
- D. No

Answer: B

Explanation:

DynamoDB supports in-place atomic updates. Reference:

<http://docs.aws.amazon.com/amazondynamodb/latest/developerguide/WorkingWithItems.html#WorkingWithItems.AtomicCounters>

NEW QUESTION 248

A bucket owner has allowed another account's IAM users to upload or access objects in his bucket. The IAM user of Account A is trying to access an object created by the IAM user of account B. What will happen in this scenario?

- A. The bucket policy may not be created as S3 will give error due to conflict of Access Rights
- B. It is not possible to give permission to multiple IAM users
- C. AWS S3 will verify proper rights given by the owner of Account A, the bucket owner as well as by the IAM user B to the object
- D. It is not possible that the IAM user of one account accesses objects of the other IAM user

Answer: C

Explanation:

If a IAM user is trying to perform some action on an object belonging to another AWS user's bucket, S3 will verify whether the owner of the IAM user has given sufficient permission to him. It also verifies the policy for the bucket as well as the policy defined by the object owner.

Reference:

<http://docs.aws.amazon.com/AmazonS3/latest/dev/access-control-auth-workflow-object-operation.html>

NEW QUESTION 249

Which of the following programming languages have an officially supported AWS SDK? Choose 2 answers

- A. Perl
- B. PHP
- C. Pascal
- D. Java
- E. SQL

Answer: BD

NEW QUESTION 251

Which of the following is an example of a good DynamoDB hash key schema for provisioned throughput efficiency?

- A. User ID, where the application has many different users.
- B. Status Code where most status codes are the same
- C. Device ID, where one is by far more popular than all the others.
- D. Game Type, where there are three possible game types

Answer: A

NEW QUESTION 255

What is one key difference between an Amazon EBS-backed and an instance-store backed instance?

- A. Virtual Private Cloud requires EBS backed instances
- B. Amazon EBS-backed instances can be stopped and restarted
- C. Auto scaling requires using Amazon EBS-backed instances.
- D. Instance-store backed instances can be stopped and restarte

Answer: B

NEW QUESTION 257

A meteorological system monitors 600 temperature gauges, obtaining temperature samples every minute and saving each sample to a DynamoDB table. Each sample involves writing 1K of data and the writes are evenly distributed over time.

How much write throughput is required for the target table?

- A. 1 write capacity unit
- B. 10 write capacity units
- C. 60 write capacity units
- D. 600 write capacity units
- E. 3600 write capacity units

Answer: B

NEW QUESTION 258

You are providing AWS consulting services for a company developing a new mobile application that will be leveraging Amazon SNS Mobile Push for push notifications. In order to send direct notification messages to indM dual devices each device registration identifier or token needs to be registered with SNS; however the developers are not sure of the best way to do this.

You advise them to:

- A. Bulk upload the device tokens contained in a CSV file via the AWS Management Console.
- B. Let the push notification service (e.
- C. Amazon Device Messaging) handle the registration.
- D. Implement a token vending service to handle the registration.
- E. Call the CreatePlatformEndPoint API function to register multiple device token

Answer: B

NEW QUESTION 259

An application stores payroll information nightly in DynamoDB for a large number of employees across hundreds of offices. Item attributes consist of individual name, office identifier, and cumulative daily hours. Managers run reports for ranges of names working in their office. One query is. "Return all Items in this office for names starting with A through E". Which table configuration will result in the lowest impact on provisioned throughput for this query?

- A. Configure the table to have a hash index on the name attribute, and a range index on the office identifier
- B. Configure the table to have a range index on the name attribute, and a hash index on the office identifier
- C. Configure a hash index on the name attribute and no range index
- D. Configure a hash index on the office Identifier attribute and no range index

Answer: B

NEW QUESTION 264

Which EC2 API call would you use to retrieve a list of Amazon Machine Images (AMIs)?

- A. DescribeInstances
- B. DescribeAMIs
- C. DescribeImages
- D. GetAMIs
- E. You cannot retrieve a list of AMIs as there are over 10,000 AMIs

Answer: E

NEW QUESTION 269

Company B provides an online image recognition service and utilizes SQS to decouple system components for scalability. The SQS consumers poll the imaging queue as often as possible to keep end-to-end throughput as high as possible. However, Company B is realizing that polling in tight loops is burning CPU cycles and increasing costs with empty responses.

How can Company B reduce the number of empty responses?

- A. Set the imaging queue visibility Timeout attribute to 20 seconds
- B. Set the Imaging queue ReceiveMessageWaitTimeSeconds attribute to 20 seconds
- C. Set the imaging queue MessageRetentionPeriod attribute to 20 seconds
- D. Set the DelaySeconds parameter of a message to 20 seconds

Answer: B

NEW QUESTION 271

What is the maximum number of S3 Buckets available per AWS account?

- A. 100 per region
- B. there is no limit
- C. 100 per account
- D. 500 per account
- E. 100 per IAM user

Answer: C

NEW QUESTION 273

What is the format of structured notification messages sent by Amazon SNS?

- A. An XML object containing MessageId, UnsubscribeURL, Subject, IVMessage and other values
- B. An JSON object containing MessageId, DuplicateFlag, IVMessage and other values
- C. An XML object containing MessageId, DuplicateFlag, IVMessage and other values
- D. An JSON object containing MessageId, unsubscribeURL, Subject, IVMessage and other values

Answer: D

NEW QUESTION 278

When using a large Scan operation in DynamoDB, what technique can be used to minimize the impact of a scan on a table's provisioned throughput?

- A. Set a smaller page size for the scan
- B. Use parallel scans
- C. Define a range index on the table
- D. Prewarm the table by updating all items

Answer: C

NEW QUESTION 282

Which code snippet below returns the URL of a load balanced web site created in CloudFormation with an AWS::ElasticLoadBalancing::LoadBalancer resource name "ElasticLoad Balancer"?

- A. "Fn::Join" : [" " . ["http://", {"Fn::GetAttr" : ["ElasticLoadBalancer", "DNSName"]}]]
- B. "Fn::Join" : [" " . ["http://", {"Fn::GetAttr" : ["ElasticLoadBalancer", "Url"]}]]
- C. "Fn::Join" : [" " . ["http://", {"Ref" : "ElasticLoadBalancerUrl"}]]
- D. "Fn::Join" : ["http://", {"Ref" : "ElasticLoadBalancerDNSName"}]]

Answer: B

NEW QUESTION 287

Which of the following items are required to allow an application deployed on an EC2 instance to write data to a DynamoDB table? Assume that no security Keys are allowed to be stored on the EC2 instance. Choose 2 answers

- A. Create an IAM User that allows write access to the DynamoDB table.
- B. Add an IAM Role to a running EC2 instance.
- C. Add an IAM User to a running EC2 Instance.
- D. Launch an EC2 Instance with the IAM Role included in the launch configuration.
- E. Create an IAM Role that allows write access to the DynamoDB table.
- F. Launch an EC2 Instance with the IAM User included in the launch configuration.

Answer: DE

NEW QUESTION 291

How is provisioned throughput affected by the chosen consistency model when reading data from a DynamoDB table?

- A. Strongly consistent reads use the same amount of throughput as eventually consistent reads
- B. Strongly consistent reads use more throughput than eventually consistent reads.
- C. Strongly consistent reads use less throughput than eventually consistent reads
- D. Strongly consistent reads use variable throughput depending on read actMty

Answer: B

NEW QUESTION 293

Which of the following services are included at no additional cost with the use of the AWS platform? Choose 2 answers

- A. Simple Storage Service
- B. Elastic Compute Cloud
- C. Auto Scaling
- D. Elastic Load Balancing
- E. CloudFormation
- F. Simple Workflow Service

Answer: CE

NEW QUESTION 295

What type of block cipher does Amazon S3 offer for server side encryption?

- A. Triple DES
- B. Advanced Encryption Standard
- C. Blowfish
- D. RC5

Answer: B

NEW QUESTION 300

You run an ad-supported photo sharing website using S3 to serve photos to visitors of your site. At some point you find out that other sites have been linking to the photos on your site, causing loss to your business. What is an effective method to mitigate this?

- A. Store photos on an EBS volume of the web server
- B. Remove public read access and use signed URLs with expiry dates.
- C. Use CloudFront distributions for static content.
- D. Block the IPs of the offending websites in Security Group

Answer: B

NEW QUESTION 305

Which of the following is chosen as the default region when making an API call with an AWS SDK?

- A. ap-northeast-1
- B. us-west-2
- C. us-east-1
- D. eu-west-1
- E. us-central-1

Answer: C

NEW QUESTION 308

Games-R-Us is launching a new game app for mobile devices. Users will log into the game using their existing Facebook account and the game will record player data and scoring information directly to a DynamoDB table.

What is the most secure approach for signing requests to the DynamoDB API?

- A. Create an IAM user with access credentials that are distributed with the mobile app to sign the requests
- B. Distribute the AWS root account access credentials with the mobile app to sign the requests
- C. Request temporary security credentials using web identity federation to sign the requests

D. Establish cross account access between the mobile app and the DynamoDB table to sign the requests

Answer: C

NEW QUESTION 309

What happens, by default, when one of the resources in a CloudFormation stack cannot be created?

- A. Previously-created resources are kept but the stack creation terminates.
- B. Previously-created resources are deleted and the stack creation terminates.
- C. The stack creation continues, and the final results indicate which steps failed.
- D. CloudFormation templates are parsed in advance so stack creation is guaranteed to succeed

Answer: B

NEW QUESTION 312

.....

Thank You for Trying Our Product

* 100% Pass or Money Back

All our products come with a 90-day Money Back Guarantee.

* One year free update

You can enjoy free update one year. 24x7 online support.

* Trusted by Millions

We currently serve more than 30,000,000 customers.

* Shop Securely

All transactions are protected by VeriSign!

100% Pass Your AWS-Certified-Developer-Associate Exam with Our Prep Materials Via below:

<https://www.certleader.com/AWS-Certified-Developer-Associate-dumps.html>