



VMware

Exam Questions 2V0-21.20

Professional VMware vSphere 7.x

NEW QUESTION 1

What are two pre-requisites for enabling ESXi secure boot? (Choose two.)

- A. External Key Management Service
- B. vCenter Server 7.0 or greater
- C. Trusted Platform Module version 2.0
- D. ESXi 7.0 or greater
- E. Unified Extensible Firmware Interface (UEFI)


Answer: AE

Explanation:

<https://blogs.vmware.com/vsphere/2017/05/secure-boot-esxi-6-5-hypervisor-assurance.html>

NEW QUESTION 2

Refer to the exhibit.

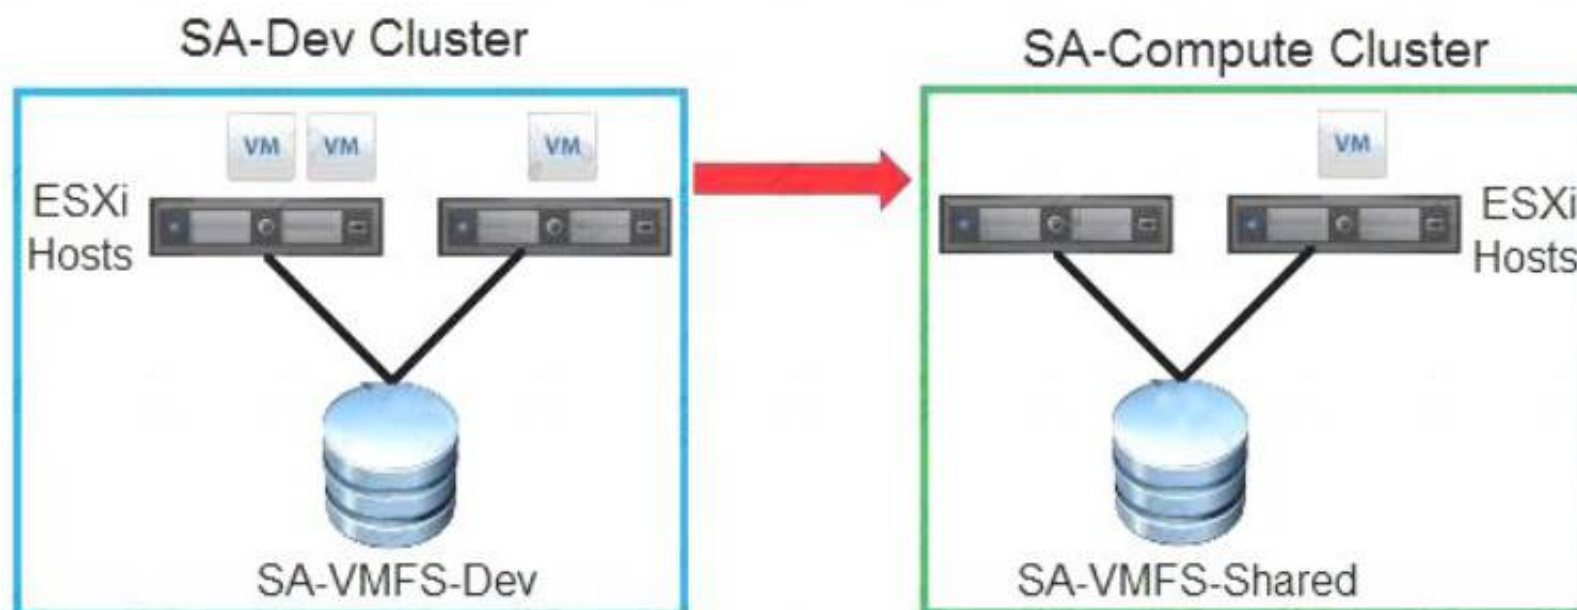

Which two migration methods can an administrator use to move virtual machines from the SA-Dev cluster to the SA-Compute cluster? (Choose two.)

- A. Cold migration of compute resource only
- B. Cold migration of storage only
- C. Hot migration of compute resource and storage resource
- D. Hot migration of compute resource only
- E. Cold migration of compute resource and storage resource

Answer: CE

NEW QUESTION 3

An administrator has been tasked with mitigating datastore capacity issues without datastore expansion. Which vSphere Storage vMotion migration option would achieve this mitigation? (Choose the best answer.)

- A. Lazy-zeroed thick-provisioned
- B. Thin-provisioned
- C. Eager-zeroed thick-provisioned
- D. Same as format source

Answer: B

NEW QUESTION 4

How many vSphere Trust Authority Clusters can a Trusted Cluster reference? (Choose the best answer.)

- A. 1
- B. 4
- C. 8
- D. 2

Answer: A

NEW QUESTION 5

What is a pre-requisite for increasing datastore capacity? (Choose the best answer.)

- A. The backing device for the datastore has enough free space.
- B. The datastore is managed by Storage DRS (SDRS).
- C. The datastore is 100% full.
- D. There are NO powered-on virtual machines on the datastore.

Answer: A

NEW QUESTION 6

Which resource pool setting is used to specify the relative priority or importance as high, normal or low? (Choose the best answer.)

- A. Limits
- B. Reservation type
- C. Shares
- D. Reservations

Answer: C

NEW QUESTION 7

ESXi provides VLAN support by assigning a VLAN ID to which component? (Choose the best answer.)

- A. Virtual standard switch
- B. Physical network interface card (NIC)
- C. Virtual distributed switch
- D. Port group

Answer: D

NEW QUESTION 8

What is the default shutdown order of virtual machines (VMs) on a host? (Choose the best answer.)

- A. Alphabetical based on VM names
- B. Highest utilization to lowest utilization
- C. Largest VM to smallest VM
- D. Reverse of the startup order

Answer: D

NEW QUESTION 9

Which action is supported over a VMkernel vMotion TCP/IP stack? (Choose the best answer.)

- A. Hot migrations
- B. Fault tolerance protection
- C. Virtual machine cloning
- D. Snapshot creation

Answer: B

NEW QUESTION 10

Which feature can an administrator use for site availability with minimal effort and a low recovery point objective (RPO)? (Choose the best answer.)

- A. vSphere vMotion
- B. vSphere High Availability
- C. vSphere Replication
- D. vSphere Fault Tolerance

Answer: C

NEW QUESTION 10

An administrator wants to implement virtual machine encryption.

Which component encrypts the virtual machine files? (Choose the best answer.)

- A. Certificate
- B. Data encryption key (DEK)
- C. Key encryption key (KEK)
- D. Key management server (KMS)

Answer: BC

NEW QUESTION 11

An administrator is asked to take a snapshot of a virtual machine prior to an application upgrade. The virtual machine has one standard virtual machine disk (VMDK) and one physical mode raw device mapping (RDM) attached.

Which statement is true with regard to taking this snapshot? (Choose the best answer.)

- A. The administrator will be unable to snapshot the RDM.
- B. The administrator will be able to snapshot the standard VMDK in independent persistent mode.
- C. The administrator will be able to snapshot the RDM in independent persistent mode.
- D. The administrator will be able to snapshot both disks.

Answer: A

Explanation:

https://docs.vmware.com/en/VMware-vSphere/6.7/com.vmware.vsphere.vm_admin.doc/GUID-53F65726-A23B

NEW QUESTION 16

A single host is manually configured to company standards.

Which option would an administrator select to capture this configuration for future use? (Choose the best answer.)

- A. Extract Host Profile
- B. Reset Host Customizations
- C. Attach Host Profile
- D. Import Host Profile

Answer: A

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.esxi.install.doc/GUID-4D8EDD07-6C77-4845-https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.hostprofiles.doc/GUID-4D3909C5-A3>

NEW QUESTION 19

Which VMware feature should an administrator configure to help manage and delegate CPU and memory resources? (Choose the best answer.)

- A. VMware Enhanced vMotion Compatibility (EVC)
- B. Resource pools
- C. vSphere Distributed Resource Scheduler (DRS)
- D. vSphere High Availability (HA)

Answer: B

NEW QUESTION 20

What is a pre-requisite for configuring virtualization-based security (VBS)? (Choose the best answer.)

- A. Change the firmware type from UEFI to Legacy BIOS
- B. Change the firmware type from Legacy BIOS to UEFI
- C. Use Windows Server 2012
- D. Use Windows Server 2008 R2

Answer: B

NEW QUESTION 23

An administrator is investigating the reason for a virtual machine restarting. In the vmware.log file, the administrator finds the following error:

```
svga | I120: WinBSOD: ( 1) 'A problem has been detected and Windows has
been shut down to prevent damage'
svga | I120: WinBSOD: ( 2) 'to your computer.'
svga | I120: WinBSOD: ( 4) 'If this is the first time you've seen this
Stop error screen,'
svga | I120: WinBSOD: ( 5) 'restart your computer. If this screen
appears again, follow'
svga | I120: WinBSOD: ( 6) 'these steps:'
svga | I120: WinBSOD: ( 8) 'Disable or uninstall any anti-virus, disk
defragmentation'
svga | I120: WinBSOD: ( 9) 'or backup utilities. Check your hard drive
configuration,'
svga | I120: WinBSOD: (10) 'and check for any updated drivers. Run
CHKDSK /F to check'
svga | I120: WinBSOD: (11) 'for hard drive corruption, and then restart
your computer.'
svga | I120: WinBSOD: (13) 'Technical information:'
svga | I120: WinBSOD: (15) '*** STOP: 0x00000024
(0x0000000000001904FB, 0xFFFFF880069B2CE8, 0xFFFFF880069B2540,0'
svga | I120: WinBSOD: (16) 'xxFFFFF880014F5FA2)
```

What is a likely cause of this virtual machine restart? (Choose the best answer.)

- A. Guest operating system fault
- B. User or API request to shut down guest operating system
- C. High Availability
- D. User or API request to restart guest operating system

Answer: A

NEW QUESTION 28

What is the minimum CPU core requirement for successful installation, or upgrade, or ESXi on a host? (Choose the best answer.)

- A. 8
- B. 1
- C. 32
- D. 2

Answer: D

NEW QUESTION 31

An administrator adds an additional host to a cluster and is attempting to remediate the configuration with a host profile.
Which option would the administrator select on the host before it can be remediated with an existing host profile? (Choose the best answer.)

- A. Export Host Customizations
- B. Export Host Profile
- C. Attach Host Profile
- D. Copy Settings from Host

Answer: C

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.hostprofiles.doc/GUID-09C00374-53C>

NEW QUESTION 33

Which step can an administrator take so that vSphere can access patch information if vCenter Server does NOT have Internet access? (Choose the best answer.)

- A. Use a Web server on the vCenter Server machine to automate the transfer of files.
- B. Install VMware vSphere Update Manager Download Service on a Windows server.
- C. Use an offline ISO file to import patches to the vSphere Lifecycle Manager depot manually.
- D. Install VMware vSphere Update Manager Download Service on a Linux server.

Answer: D

NEW QUESTION 38

An administrator is tasked with upgrading an existing vSphere environment to version 7.0. There are existing VMFS3 and VMFS5 datastores in the environment.
Which statement is true regarding this upgrade? (Choose the best answer.)

- A. An ESXi 7.0 host will NOT recognize a VMFS3 datastore.
- B. VMFS3 is supported with ESXi 7.0 to store boot configurations only.
- C. A VMFS5 datastore CANNOT be upgraded; a new VMFS6 datastore is required.
- D. An ESXi 7.0 host can automatically upgrade a VMFS5 datastore.

Answer: C

NEW QUESTION 42

What determines the default bandwidth share allocation for system traffic, such as vSphere Fault Tolerance and vSphere vMotion? (Choose the best answer.)

- A. Physical network adapter
- B. Network I/O Control version
- C. Virtual machine hardware version
- D. Load-balancing

Answer: B

NEW QUESTION 46

Which privilege is required to run the esxtop utility? (Choose the best answer.)

- A. Root user
- B. vStatsUser
- C. vStatsAdmin
- D. Administrator

Answer: A

NEW QUESTION 51

Refer to the exhibit.

```
9:04:41am up 5 min, 637 worlds, 4 VMs, 6 vCPUs; CPU load average: 0.33, 0.09, 0.00
PCPU USED (%): 89 90 95 97 AVG: 92
PCPU UTIL (%): 88 89 94 96 AVG: 92
```

ID	GID	NAME	NWLD	%USED	%RUN	%SYS	%WAIT	%VMWAIT	%RDY	%IDLE	%OVRLP	%CSTP	%MLMTD	%SWPWT
8	8	helper	294	0.00	400.00	0.00	28784.56	-	400.00	0.00	400.00	0.00	0.00	0.00
1	1	system	152	1.35	31.90	0.15	14796.04	-	373.34	0.00	0.29	0.00	0.00	41.54
14865	14865	Linux2	7	73.32	74.45	0.07	582.88	0.32	50.48	0.11	0.20	0.00	0.00	0.00
14873	14873	Win1	9	115.74	116.08	0.00	743.07	16.52	45.26	23.51	0.36	5.66	0.00	0.00
14881	14881	Win2	9	104.23	104.40	0.00	759.42	16.44	43.60	41.62	0.35	2.63	0.00	0.00
14895	14895	Linux1	7	67.84	69.86	0.00	605.51	0.00	32.46	0.00	0.08	0.00	0.00	0.00
5485	5485	hostd.66720	21	2.30	2.30	0.00	2100.00	-	2.16	0.00	0.00	0.00	0.00	0.00
5233	5233	httpdproxy.6668	14	0.29	0.30	0.01	1400.00	-	0.93	0.00	0.00	0.00	0.00	0.00
9	9	drivers	12	0.00	0.00	0.00	1200.00	-	0.21	0.00	0.00	0.00	0.00	0.00
10	10	ft	4	0.00	0.00	0.00	399.89	-	0.20	0.00	0.00	0.00	0.00	0.00
1012	1012	vmtoolsd.65822	3	0.13	0.14	0.00	300.00	-	0.16	0.00	0.00	0.00	0.00	0.00
14857	14857	esxtop.68027	1	2.78	3.89	0.00	97.10	-	0.13	0.00	0.00	0.00	0.00	0.00
14777	14777	sshd.68017	1	0.07	0.07	0.00	100.00	-	0.07	0.00	0.00	0.00	0.00	0.00

What does the %RDY for the Win1 virtual machine indicate? (Choose the best answer.)

- A. High CPU wait time

- B. Low CPU usage
- C. High CPU contention
- D. Low CPU contention

Answer: C

NEW QUESTION 53

An administrator is tasked with planning an upgrade of a VMware vSphere environment to version 7.0. The platform consists of 80 ESXi hosts, logically divided into 10 clusters. The tasks will be completed by another operations team within the company.

The hardware is consistent and a single embedded vCenter Server 6.7 appliance is managing the environment. Which statement is true regarding a suitable upgrade approach? (Choose the best answer.)

- A. The vCenter Server can be upgraded using a pre-configured customized JSON template.
- B. The ESXi hosts can only be upgraded using the Graphical User Interface Installer.
- C. Auto-deploy must be used to upgrade the large scale environment.
- D. A new Platform Services Controller must be deployed first.

Answer: C

NEW QUESTION 54

Which two statements are true regarding the use of firmware update packages in vSphere Lifecycle Manager? (Choose two.)

- A. A hardware support manager must be registered as a vCenter Server extension.
- B. The firmware and drivers add-on are distributed through the official VMware online depot.
- C. The firmware and drivers add-on can be used on clusters that are managed with baselines.
- D. The firmware and drivers add-on can add or remove components from the ESXi base image.
- E. The firmware and drivers add-on is provided by a third-party vendor.

Answer: AD

NEW QUESTION 55

An administrator wants to configure vCenter Server High Availability so that each node is located in a different data center. Which requirement must be met? (Choose the best answer.)

- A. Each node must be configured with at least three network adapters.
- B. Network latency between the nodes must be less than 10 milliseconds.
- C. All nodes must be located on a vSAN datastore in each data center.
- D. A vCenter Server license must be assigned to each node.

Answer: B

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.avail.doc/GUID-8FD87389-8CC9-429>

NEW QUESTION 56

What is the foundation of a software-defined data center (SDDC)? (Choose the best answer.)

- A. vRealize Operations Manager
- B. vSphere
- C. vSAN
- D. NSX

Answer: B

NEW QUESTION 60

An administrator wants to be able to send vCenter Server log files to a remote syslog server and analyze logs using vRealize Log Insight. Which step must the administrator take to meet this requirement? (Choose the best answer.)

- A. Configure the vCenter Server logging options using the vSphere Client.
- B. Specify the remote syslog server name at deployment using the vCenter Server GUI Installer.
- C. Specify the vRealize Log Insight system name using the vSphere Client.
- D. Configure log file forwarding using the vCenter Server Management Interface.

Answer: D

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vsphere.vcenter.configuration.doc/GUID-9633>

NEW QUESTION 65

An administrator needs to configure Proactive High Availability (HA) in a vSphere environment so that virtual machines (VMs) do not run on any partially degraded hosts. The administrator would also like to see the recommendations before VMs are migrated.

Which automation and remediation level should the administrator select? (Choose the best answer.)

- A. Automation Level – Manual Remediation Level – Quarantine mode
- B. Automation Level – Automated Remediation Level – Maintenance mode
- C. Automation Level – Manual Remediation Level – Maintenance mode

D. Automation Level – Automated Remediation Level – Mixed mode

Answer: C

NEW QUESTION 69

An administrator is tasked with upgrading an existing vSphere environment to version 7.0. The current configuration is using an external Platform Services Controller.

Which two statements are true regarding this upgrade? (Choose two.)

- A. The external Platform Services Controller needs to be converged into an embedded vCenter Server Appliance.
- B. The external Platform Services Controller needs to be decommissioned following the deployment of the new vCenter Server Appliance.
- C. The external Platform Services Controller backup can be restored to a new embedded vCenter Server Appliance.
- D. The external Platform Services Controller needs to be upgraded after the vCenter Server Appliance.
- E. The external Platform Services Controller needs to be powered down while a new vCenter Server Appliance is deployed.

Answer: AB

Explanation:

<https://docs.vmware.com/en/VMware-vSphere/7.0/com.vmware.vcenter.upgrade.doc/GUID-30485437-B107-42>

NEW QUESTION 73

There are two vSphere clusters in a company environment. One cluster is hosting development workloads and another is hosting production workloads. Both vSphere clusters are managed by the same vCenter Server.

The application team would like to move a new virtual machine from the development to production cluster with no downtime.

Which feature would allow non-disruptive movement between these two clusters? (Choose the best answer.)

- A. Cross vCenter Migration
- B. vSphere High Availability
- C. vSphere vMotion
- D. vSphere Replication

Answer: C

NEW QUESTION 77

In a vSphere High Availability (vSphere HA) cluster, which condition can be detected by datastore heartbeating? (Choose the best answer.)

- A. Fault tolerance virtual machine (VM) failover
- B. Network isolation
- C. Virtual machine (VM) disk failure
- D. Datastore All Paths Down (APD) event

Answer: B

NEW QUESTION 80

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

2V0-21.20 Practice Exam Features:

- * 2V0-21.20 Questions and Answers Updated Frequently
- * 2V0-21.20 Practice Questions Verified by Expert Senior Certified Staff
- * 2V0-21.20 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 2V0-21.20 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 2V0-21.20 Practice Test Here](#)