

Microsoft

Exam Questions DP-203

Data Engineering on Microsoft Azure



NEW QUESTION 1

- (Exam Topic 1)

You need to design the partitions for the product sales transactions. The solution must mee the sales transaction dataset requirements.

What should you include in the solution? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area

Partition product sales transactions data by:	<div>Sales date Product ID Promotion ID</div>
Store product sales transactions data in:	<div>An Azure Synapse Analytics dedicated SQL pool An Azure Synapse Analytics serverless SQL pool An Azure Data Lake Storage Gen2 account linked to an Azure Synapse Analytics workspace</div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Sales date

Scenario: Contoso requirements for data integration include:

➤ Partition data that contains sales transaction records. Partitions must be designed to provide efficient loads by month. Boundary values must belong to the partition on the right.

Box 2: An Azure Synapse Analytics Dedicated SQL pool Scenario: Contoso requirements for data integration include:

➤ Ensure that data storage costs and performance are predictable.

The size of a dedicated SQL pool (formerly SQL DW) is determined by Data Warehousing Units (DWU). Dedicated SQL pool (formerly SQL DW) stores data in relational tables with columnar storage. This format significantly reduces the data storage costs, and improves query performance.

Synapse analytics dedicated sql pool Reference:

<https://docs.microsoft.com/en-us/azure/synapse-analytics/sql-data-warehouse/sql-data-warehouse-overview-wha>

NEW QUESTION 2

- (Exam Topic 1)

You need to ensure that the Twitter feed data can be analyzed in the dedicated SQL pool. The solution must meet the customer sentiment analytics requirements. Which three Transaction-SQL DDL commands should you run in sequence? To answer, move the appropriate commands from the list of commands to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Commands

Answer Area

CREATE EXTERNAL DATA SOURCE

CREATE EXTERNAL FILE FORMAT

CREATE EXTERNAL TABLE

CREATE EXTERNAL TABLE AS SELECT

CREATE DATABASE SCOPED CREDENTIAL

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Scenario: Allow Contoso users to use PolyBase in an Azure Synapse Analytics dedicated SQL pool to query the content of the data records that host the Twitter feeds. Data must be protected by using row-level security (RLS). The users must be authenticated by using their own Azure AD credentials.

Box 1: CREATE EXTERNAL DATA SOURCE

External data sources are used to connect to storage accounts. Box 2: CREATE EXTERNAL FILE FORMAT

CREATE EXTERNAL FILE FORMAT creates an external file format object that defines external data stored in Azure Blob Storage or Azure Data Lake Storage. Creating an external file format is a prerequisite for creating an external table.

Box 3: CREATE EXTERNAL TABLE AS SELECT

When used in conjunction with the CREATE TABLE AS SELECT statement, selecting from an external table imports data into a table within the SQL pool. In addition to the COPY statement, external tables are useful for loading data.

Reference:

<https://docs.microsoft.com/en-us/azure/synapse-analytics/sql/develop-tables-external-tables>

NEW QUESTION 3

- (Exam Topic 1)

You need to integrate the on-premises data sources and Azure Synapse Analytics. The solution must meet the data integration requirements.

Which type of integration runtime should you use?

- A. Azure-SSIS integration runtime
- B. self-hosted integration runtime

C. Azure integration runtime

Answer: C

NEW QUESTION 4

- (Exam Topic 3)

You need to collect application metrics, streaming query events, and application log messages for an Azure Databrick cluster. Which type of library and workspace should you implement? To answer, select the appropriate options in the answer area.
 NOTE: Each correct selection is worth one point.

Library:

Azure Databricks Monitoring Library

Microsoft Azure Management Monitoring Library

PyTorch

TensorFlow

Workspace:

Azure Databricks

Azure Log Analytics

Azure Machine Learning

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

You can send application logs and metrics from Azure Databricks to a Log Analytics workspace. It uses the Azure Databricks Monitoring Library, which is available on GitHub.
 References:
<https://docs.microsoft.com/en-us/azure/architecture/databricks-monitoring/application-logs>

NEW QUESTION 5

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
 After you answer a question in this scenario, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
 You have an Azure Storage account that contains 100 GB of files. The files contain text and numerical values. 75% of the rows contain description data that has an average length of 1.1 MB.
 You plan to copy the data from the storage account to an enterprise data warehouse in Azure Synapse Analytics.
 You need to prepare the files to ensure that the data copies quickly. Solution: You convert the files to compressed delimited text files. Does this meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

All file formats have different performance characteristics. For the fastest load, use compressed delimited text files.
 Reference:
<https://docs.microsoft.com/en-us/azure/sql-data-warehouse/guidance-for-loading-data>

NEW QUESTION 6

- (Exam Topic 3)

You have an on-premises data warehouse that includes the following fact tables. Both tables have the following columns: DateKey, ProductKey, RegionKey. There are 120 unique product keys and 65 unique region keys.

Table	Comments
Sales	The table is 600 GB in size. DateKey is used extensively in the WHERE clause in queries. ProductKey is used extensively in join operations. RegionKey is used for grouping. Severity-five percent of records relate to one of 40 regions.
Invoice	The table is 6 GB in size. DateKey and ProductKey are used extensively in the WHERE clause in queries. RegionKey is used for grouping.

Queries that use the data warehouse take a long time to complete.
 You plan to migrate the solution to use Azure Synapse Analytics. You need to ensure that the Azure-based solution optimizes query performance and minimizes processing skew.
 What should you recommend? To answer, select the appropriate options in the answer area.
 NOTE: Each correct selection is worth one point

Table	Distribution type	Distribution column
Sales:	<div>▼</div> <div>Hash-distributed</div> <div>Round-robin</div>	<div>▼</div> <div>DateKey</div> <div>ProductKey</div> <div>RegionKey</div>
Invoices:	<div>▼</div> <div>Hash-distributed</div> <div>Round-robin</div>	<div>▼</div> <div>DateKey</div> <div>ProductKey</div> <div>RegionKey</div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Hash-distributed

Box 2: ProductKey

ProductKey is used extensively in joins.

Hash-distributed tables improve query performance on large fact tables.

Box 3: Round-robin

Box 4: RegionKey

Round-robin tables are useful for improving loading speed.

Consider using the round-robin distribution for your table in the following scenarios:

- When getting started as a simple starting point since it is the default
- If there is no obvious joining key
- If there is not good candidate column for hash distributing the table
- If the table does not share a common join key with other tables
- If the join is less significant than other joins in the query
- When the table is a temporary staging table

Note: A distributed table appears as a single table, but the rows are actually stored across 60 distributions. The rows are distributed with a hash or round-robin algorithm.

Reference:

<https://docs.microsoft.com/en-us/azure/sql-data-warehouse/sql-data-warehouse-tables-distribute>

NEW QUESTION 7

- (Exam Topic 3)

You have several Azure Data Factory pipelines that contain a mix of the following types of activities.

- * Wrangling data flow
- * Notebook
- * Copy
- * jar

Which two Azure services should you use to debug the activities? Each correct answer presents part of the solution NOTE: Each correct selection is worth one point.

- A. Azure HDInsight
- B. Azure Databricks
- C. Azure Machine Learning
- D. Azure Data Factory
- E. Azure Synapse Analytics

Answer: CE

NEW QUESTION 8

- (Exam Topic 3)

You are monitoring an Azure Stream Analytics job.

The Backlogged Input Events count has been 20 for the last hour. You need to reduce the Backlogged Input Events count.

What should you do?

- A. Drop late arriving events from the job.

- B. Add an Azure Storage account to the job.
- C. Increase the streaming units for the job.
- D. Stop the job.

Answer: C

Explanation:

General symptoms of the job hitting system resource limits include:

➤ If the backlog event metric keeps increasing, it's an indicator that the system resource is constrained (either because of output sink throttling, or high CPU).
Note: Backlogged Input Events: Number of input events that are backlogged. A non-zero value for this metric implies that your job isn't able to keep up with the number of incoming events. If this value is slowly increasing or consistently non-zero, you should scale out your job: adjust Streaming Units.

Reference:

<https://docs.microsoft.com/en-us/azure/stream-analytics/stream-analytics-scale-jobs> <https://docs.microsoft.com/en-us/azure/stream-analytics/stream-analytics-monitoring>

NEW QUESTION 9

- (Exam Topic 3)

You need to schedule an Azure Data Factory pipeline to execute when a new file arrives in an Azure Data Lake Storage Gen2 container.
Which type of trigger should you use?

- A. on-demand
- B. tumbling window
- C. schedule
- D. event

Answer: D

Explanation:

Event-driven architecture (EDA) is a common data integration pattern that involves production, detection, consumption, and reaction to events. Data integration scenarios often require Data Factory customers to trigger pipelines based on events happening in storage account, such as the arrival or deletion of a file in Azure Blob Storage account.

Reference:

<https://docs.microsoft.com/en-us/azure/data-factory/how-to-create-event-trigger>

NEW QUESTION 10

- (Exam Topic 3)

What should you recommend using to secure sensitive customer contact information?

- A. data labels
- B. column-level security
- C. row-level security
- D. Transparent Data Encryption (TDE)

Answer: B

Explanation:

Scenario: All cloud data must be encrypted at rest and in transit.

Always Encrypted is a feature designed to protect sensitive data stored in specific database columns from access (for example, credit card numbers, national identification numbers, or data on a need to know basis). This includes database administrators or other privileged users who are authorized to access the database to perform management tasks, but have no business need to access the particular data in the encrypted columns. The data is always encrypted, which means the encrypted data is decrypted only for processing by client applications with access to the encryption key.

References:

<https://docs.microsoft.com/en-us/azure/sql-database/sql-database-security-overview>

NEW QUESTION 10

- (Exam Topic 3)

You have an Azure Synapse Analytics dedicated SQL pool that contains a table named Table1.

You have files that are ingested and loaded into an Azure Data Lake Storage Gen2 container named container1.

You plan to insert data from the files into Table1 and azure Data Lake Storage Gen2 container named container1.

You plan to insert data from the files into Table1 and transform the data. Each row of data in the files will produce one row in the serving layer of Table1.

You need to ensure that when the source data files are loaded to container1, the DateTime is stored as an additional column in Table1.

Solution: You use a dedicated SQL pool to create an external table that has a additional DateTime column. Does this meet the goal?

- A. Yes
- B. No

Answer: A

NEW QUESTION 14

- (Exam Topic 3)

You are designing a statistical analysis solution that will use custom proprietary1 Python functions on near real-time data from Azure Event Hubs.

You need to recommend which Azure service to use to perform the statistical analysis. The solution must minimize latency.

What should you recommend?

- A. Azure Stream Analytics
- B. Azure SQL Database
- C. Azure Databricks
- D. Azure Synapse Analytics

Answer: A

NEW QUESTION 16

- (Exam Topic 3)

You have a C# application that process data from an Azure IoT hub and performs complex transformations. You need to replace the application with a real-time solution. The solution must reuse as much code as possible from the existing application.

- A. Azure Databricks
- B. Azure Event Grid
- C. Azure Stream Analytics
- D. Azure Data Factory

Answer: C

Explanation:

Azure Stream Analytics on IoT Edge empowers developers to deploy near-real-time analytical intelligence closer to IoT devices so that they can unlock the full value of device-generated data. UDF are available in C# for IoT Edge jobs

Azure Stream Analytics on IoT Edge runs within the Azure IoT Edge framework. Once the job is created in Stream Analytics, you can deploy and manage it using IoT Hub.

References:

<https://docs.microsoft.com/en-us/azure/stream-analytics/stream-analytics-edge>

NEW QUESTION 17

- (Exam Topic 3)

You are designing a partition strategy for a fact table in an Azure Synapse Analytics dedicated SQL pool. The table has the following specifications:

- Contain sales data for 20,000 products.
- Use hash distribution on a column named ProductID,
- Contain 2.4 billion records for the years 2019 and 2020.

Which number of partition ranges provides optimal compression and performance of the clustered columnstore index?

- A. 40
- B. 240
- C. 400
- D. 2,400

Answer: B

NEW QUESTION 21

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this scenario, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure Storage account that contains 100 GB of files. The files contain text and numerical values. 75% of the rows contain description data that has an average length of 1.1 MB.

You plan to copy the data from the storage account to an Azure SQL data warehouse. You need to prepare the files to ensure that the data copies quickly.

Solution: You modify the files to ensure that each row is more than 1 MB. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:

Instead modify the files to ensure that each row is less than 1 MB. References:

<https://docs.microsoft.com/en-us/azure/sql-data-warehouse/guidance-for-loading-data>

NEW QUESTION 23

- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You are designing an Azure Stream Analytics solution that will analyze Twitter data.

You need to count the tweets in each 10-second window. The solution must ensure that each tweet is counted only once.

Does this meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

Tumbling windows are a series of fixed-sized, non-overlapping and contiguous time intervals. The following diagram illustrates a stream with a series of events and how they are mapped into 10-second tumbling windows.

Tell me the count of tweets per time zone every 10 seconds



```
SELECT TimeZone, COUNT(*) AS Count
FROM TwitterStream TIMESTAMP BY CreatedAt
GROUP BY TimeZone, TumblingWindow(second,10)
```

Reference:

<https://docs.microsoft.com/en-us/stream-analytics-query/tumbling-window-azure-stream-analytics>

NEW QUESTION 27

- (Exam Topic 3)

You have an Azure subscription that contains the following resources:

* An Azure Active Directory (Azure AD) tenant that contains a security group named Group1.

* An Azure Synapse Analytics SQL pool named Pool1.

You need to control the access of Group1 to specific columns and rows in a table in Pool1

Which Transact-SQL commands should you use? To answer, select the appropriate options in the answer area. NOTE: Each appropriate options in the answer area.

Answer Area

To control access to the columns:

CREATE CRYPTOGRAPHIC PROVIDER
 CREATE PARTITION FUNCTION
 CREATE SECURITY POLICY
 GRANT

To control access to the rows:

CREATE CRYPTOGRAPHIC PROVIDER
 CREATE PARTITION FUNCTION
 CREATE SECURITY POLICY
 GRANT

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

To control access to the columns:

CREATE CRYPTOGRAPHIC PROVIDER
 CREATE PARTITION FUNCTION
 CREATE SECURITY POLICY
 GRANT

To control access to the rows:

CREATE CRYPTOGRAPHIC PROVIDER
 CREATE PARTITION FUNCTION
 CREATE SECURITY POLICY
 GRANT

NEW QUESTION 28

- (Exam Topic 3)

You plan to implement an Azure Data Lake Gen2 storage account.

You need to ensure that the data lake will remain available if a data center fails in the primary Azure region. The solution must minimize costs.

Which type of replication should you use for the storage account?

- A. geo-redundant storage (GRS)
- B. zone-redundant storage (ZRS)
- C. locally-redundant storage (LRS)
- D. geo-zone-redundant storage (GZRS)

Answer: A

Explanation:

Geo-redundant storage (GRS) copies your data synchronously three times within a single physical location in the primary region using LRS. It then copies your data asynchronously to a single physical location in the secondary region.

Reference:

<https://docs.microsoft.com/en-us/azure/storage/common/storage-redundancy>

NEW QUESTION 29

- (Exam Topic 3)

You are developing a solution that will stream to Azure Stream Analytics. The solution will have both streaming data and reference data.

Which input type should you use for the reference data?

- A. Azure Cosmos DB
- B. Azure Blob storage
- C. Azure IoT Hub
- D. Azure Event Hubs

Answer: B

Explanation:

Stream Analytics supports Azure Blob storage and Azure SQL Database as the storage layer for Reference Data.

Reference:

<https://docs.microsoft.com/en-us/azure/stream-analytics/stream-analytics-use-reference-data>

NEW QUESTION 34

- (Exam Topic 3)

You store files in an Azure Data Lake Storage Gen2 container. The container has the storage policy shown in the following exhibit.



Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

NOTE: Each correct selection is worth one point.

Answer Area

The files are [answer choice] after 30 days.

deleted from the container

moved to archive storage

moved to cool storage

moved to hot storage

The storage policy applies to [answer choice].

container1/contoso1.csv

container1/docs/contoso.json

container1/mycontoso/contoso.csv

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

The files are [answer choice] after 30 days.

deleted from the container

moved to archive storage

moved to cool storage

moved to hot storage

The storage policy applies to [answer choice].

container1/contoso1.csv

container1/docs/contoso.json

container1/mycontoso/contoso.csv

NEW QUESTION 38

- (Exam Topic 3)

You plan to monitor an Azure data factory by using the Monitor & Manage app.

You need to identify the status and duration of activities that reference a table in a source database.

Which three actions should you perform in sequence? To answer, move the actions from the list of actions to the answer are and arrange them in the correct order.

Actions

From the Data Factory monitoring app, add the Source user property to the Activity Runs table.

From the Data Factory monitoring app, add the Source user property to the Pipeline Runs table.

From the Data Factory authoring UI, publish the pipelines.

From the Data Factory monitoring app, add a linked service to the Pipeline Runs table.

From the Data Factory authoring UI, generate a user property for Source on all activities.

From the Data Factory authoring UI, generate a user property for Source on all datasets.

Answer Area

>

<

↑

↓

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: From the Data Factory authoring UI, generate a user property for Source on all activities. Step 2: From the Data Factory monitoring app, add the Source user property to Activity Runs table.

You can promote any pipeline activity property as a user property so that it becomes an entity that you can monitor. For example, you can promote the Source and Destination properties of the copy activity in your pipeline as user properties. You can also select Auto Generate to generate the Source and Destination user properties for a copy activity.

Step 3: From the Data Factory authoring UI, publish the pipelines
 Publish output data to data stores such as Azure SQL Data Warehouse for business intelligence (BI) applications to consume.
 References:
<https://docs.microsoft.com/en-us/azure/data-factory/monitor-visually>

NEW QUESTION 42


- (Exam Topic 3)
 You plan to create an Azure Synapse Analytics dedicated SQL pool.
 You need to minimize the time it takes to identify queries that return confidential information as defined by the company's data privacy regulations and the users who executed the queries.
 Which two components should you include in the solution? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. sensitivity-classification labels applied to columns that contain confidential information
- B. resource tags for databases that contain confidential information
- C. audit logs sent to a Log Analytics workspace
- D. dynamic data masking for columns that contain confidential information

Answer: AC

Explanation:

A: You can classify columns manually, as an alternative or in addition to the recommendation-based classification:

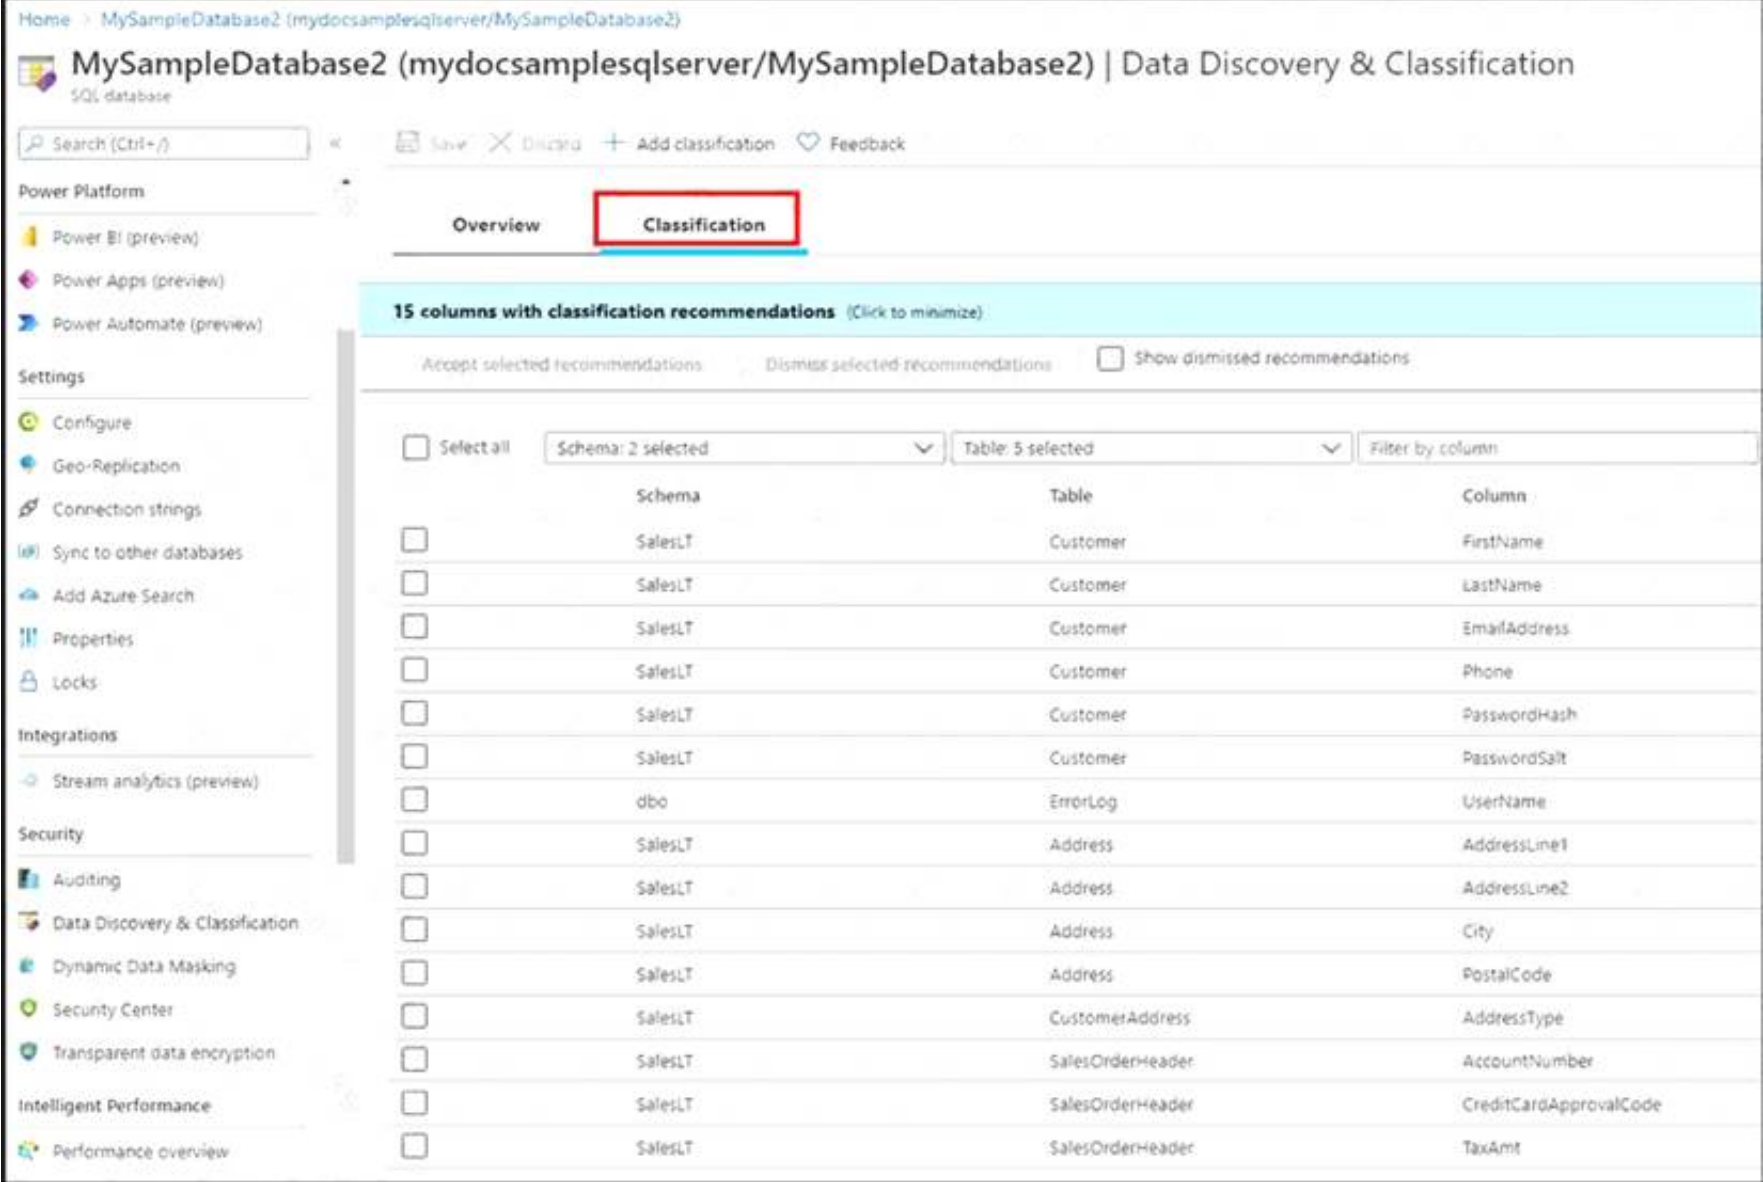

- > Select Add classification in the top menu of the pane.
- > In the context window that opens, select the schema, table, and column that you want to classify, and the information type and sensitivity label.
- > Select Add classification at the bottom of the context window.

C: An important aspect of the information-protection paradigm is the ability to monitor access to sensitive data. Azure SQL Auditing has been enhanced to include a new field in the audit log called data_sensitivity_information. This field logs the sensitivity classifications (labels) of the data that was returned by a query. Here's an example:

d	client_ip	application_name	duration_milliseconds	response_rows	affected_rows	connection_id	data_sensitivity_information
	7.125	Microsoft SQL Server Management Studio - Query	1	847	847	C244A066-2271-...	Confidential - GDPR
	7.125	Microsoft SQL Server Management Studio - Query	2	32	32	C244A066-2271-...	Confidential
	7.125	Microsoft SQL Server Management Studio - Query	41	32	32	A7088FD4-759E-...	Confidential, Confidential - GDPR

Reference:
<https://docs.microsoft.com/en-us/azure/azure-sql/database/data-discovery-and-classification-overview>

NEW QUESTION 46

- (Exam Topic 3)
 You are designing an Azure Databricks table. The table will ingest an average of 20 million streaming events per day.
 You need to persist the events in the table for use in incremental load pipeline jobs in Azure Databricks. The solution must minimize storage costs and incremental load times.
 What should you include in the solution?

- A. Partition by DateTime fields.
- B. Sink to Azure Queue storage.
- C. Include a watermark column.
- D. Use a JSON format for physical data storage.

Answer: B

Explanation:

The Databricks ABS-AQS connector uses Azure Queue Storage (AQS) to provide an optimized file source that lets you find new files written to an Azure Blob storage (ABS) container without repeatedly listing all of the files.

This provides two major advantages:

- Lower costs: no more costly LIST API requests made to ABS.

Reference:

<https://docs.microsoft.com/en-us/azure/databricks/spark/latest/structured-streaming/aqs>

NEW QUESTION 50

- (Exam Topic 3)

You have an Azure Synapse Analytics dedicated SQL pool that contains a large fact table. The table contains 50 columns and 5 billion rows and is a heap.

Most queries against the table aggregate values from approximately 100 million rows and return only two columns.

You discover that the queries against the fact table are very slow. Which type of index should you add to provide the fastest query times?

- A. nonclustered columnstore
- B. clustered columnstore
- C. nonclustered
- D. clustered

Answer: B

Explanation:

Clustered columnstore indexes are one of the most efficient ways you can store your data in dedicated SQL pool.

Columnstore tables won't benefit a query unless the table has more than 60 million rows. Reference:

<https://docs.microsoft.com/en-us/azure/synapse-analytics/sql/best-practices-dedicated-sql-pool>

NEW QUESTION 53

- (Exam Topic 3)

You are designing an Azure Stream Analytics job to process incoming events from sensors in retail environments.

You need to process the events to produce a running average of shopper counts during the previous 15 minutes, calculated at five-minute intervals.

Which type of window should you use?

- A. snapshot
- B. tumbling
- C. hopping
- D. sliding

Answer: B

Explanation:

Tumbling windows are a series of fixed-sized, non-overlapping and contiguous time intervals. The following diagram illustrates a stream with a series of events and how they are mapped into 10-second tumbling windows.

Tell me the count of tweets per time zone every 10 seconds



```
SELECT TimeZone, COUNT(*) AS Count
FROM TwitterStream TIMESTAMP BY CreatedAt
GROUP BY TimeZone, TumblingWindow(second,10)
```

Reference:

<https://docs.microsoft.com/en-us/stream-analytics-query/tumbling-window-azure-stream-analytics>

NEW QUESTION 56

- (Exam Topic 3)

You implement an enterprise data warehouse in Azure Synapse Analytics. You have a large fact table that is 10 terabytes (TB) in size. Incoming queries use the primary key SaleKey column to retrieve data as displayed in the following table:

SaleKey	CityKey	CustomerKey	StockItemKey	InvoiceDateKey	Quantity	UnitPrice	TotalExcludingTax
49309	90858	70	69	10/22/13	8	16	128
49313	55710	126	69	10/22/13	2	16	32
49343	44710	234	68	10/22/13	10	16	160
49352	66109	163	70	10/22/13	4	16	64
49488	65312	230	70	10/22/13	8	16	128
49646	85877	271	70	10/24/13	1	16	16
49798	41238	288	69	10/24/13	1	16	16

You need to distribute the large fact table across multiple nodes to optimize performance of the table. Which technology should you use?

- A. hash distributed table with clustered index
- B. hash distributed table with clustered Columnstore index
- C. round robin distributed table with clustered index
- D. round robin distributed table with clustered Columnstore index
- E. heap table with distribution replicate

Answer: B

Explanation:

Hash-distributed tables improve query performance on large fact tables.

Columnstore indexes can achieve up to 100x better performance on analytics and data warehousing workloads and up to 10x better data compression than traditional rowstore indexes.

Reference:

<https://docs.microsoft.com/en-us/azure/sql-data-warehouse/sql-data-warehouse-tables-distribute> <https://docs.microsoft.com/en-us/sql/relational-databases/indexes/columnstore-indexes-query-performance>

NEW QUESTION 60

- (Exam Topic 3)

You are planning the deployment of Azure Data Lake Storage Gen2. You have the following two reports that will access the data lake:

- > Report1: Reads three columns from a file that contains 50 columns.
- > Report2: Queries a single record based on a timestamp.

You need to recommend in which format to store the data in the data lake to support the reports. The solution must minimize read times.

What should you recommend for each report? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Report1: ▼

Avro
CSV
Parquet
TSV

Report2: ▼

Avro
CSV
Parquet
TSV

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Report1: CSV

CSV: The destination writes records as delimited data. Report2: AVRO

AVRO supports timestamps.

Not Parquet, TSV: Not options for Azure Data Lake Storage Gen2. Reference:

<https://streamsets.com/documentation/datacollector/latest/help/datacollector/UserGuide/Destinations/ADLS-G2>

NEW QUESTION 63

- (Exam Topic 3)

You have an Azure data factory.

You need to ensure that pipeline-run data is retained for 120 days. The solution must ensure that you can query the data by using the Kusto query language.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Actions	Answer Area
Select the PipelineRuns category.	
Create a Log Analytics workspace that has Data Retention set to 120 days.	
Stream to an Azure event hub.	
Create an Azure Storage account that has a lifecycle policy.	
From the Azure portal, add a diagnostic setting.	
Send the data to a Log Analytics workspace.	
Select the TriggerRuns category.	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Create an Azure Storage account that has a lifecycle policy

To automate common data management tasks, Microsoft created a solution based on Azure Data Factory. The service, Data Lifecycle Management, makes frequently accessed data available and archives or purges other data according to retention policies. Teams across the company use the service to reduce storage costs, improve app performance, and comply with data retention policies.

Step 2: Create a Log Analytics workspace that has Data Retention set to 120 days.

Data Factory stores pipeline-run data for only 45 days. Use Azure Monitor if you want to keep that data for a longer time. With Monitor, you can route diagnostic logs for analysis to multiple different targets, such as a Storage Account: Save your diagnostic logs to a storage account for auditing or manual inspection. You can use the diagnostic settings to specify the retention time in days.

Step 3: From Azure Portal, add a diagnostic setting. Step 4: Send the data to a log Analytics workspace,

Event Hub: A pipeline that transfers events from services to Azure Data Explorer. Keeping Azure Data Factory metrics and pipeline-run data.

Configure diagnostic settings and workspace.

Create or add diagnostic settings for your data factory.

- > In the portal, go to Monitor. Select Settings > Diagnostic settings.
- > Select the data factory for which you want to set a diagnostic setting.
- > If no settings exist on the selected data factory, you're prompted to create a setting. Select Turn on diagnostics.
- > Give your setting a name, select Send to Log Analytics, and then select a workspace from Log Analytics Workspace.
- > Select Save. Reference:

<https://docs.microsoft.com/en-us/azure/data-factory/monitor-using-azure-monitor>

NEW QUESTION 67

- (Exam Topic 3)

You have an Azure Factory instance named DF1 that contains a pipeline named PL1.PL1 includes a tumbling window trigger.

You create five clones of PL1. You configure each clone pipeline to use a different data source.

You need to ensure that the execution schedules of the clone pipeline match the execution schedule of PL1. What should you do?

- A. Add a new trigger to each cloned pipeline
- B. Associate each cloned pipeline to an existing trigger.
- C. Create a tumbling window trigger dependency for the trigger of PL1.
- D. Modify the Concurrency setting of each pipeline.

Answer: B

NEW QUESTION 68

- (Exam Topic 3)

You are creating dimensions for a data warehouse in an Azure Synapse Analytics dedicated SQL pool. You create a table by using the Transact-SQL statement shown in the following exhibit.

```
CREATE TABLE [DBO].[DimProduct] (  
    [ProductKey] [int] IDENTITY(1,1) NOT NULL,  
    [ProductSourceID] [int] NOT NULL,  
    [ProductName] [nvarchar](100) NOT NULL,  
    [ProductNumber] [nvarchar](25) NOT NULL,  
    [Color] [nvarchar](15) NULL,  
    [Size] [nvarchar](5) NULL,  
    [Weight] [decimal](8, 2) NULL,  
    [ProductCategory] [nvarchar](100) NULL,  
    [SellStartDate] [date] NOT NULL,  
    [SellEndDate] [date] NULL,  
    [RowInsertedDateTime] [datetime] NOT NULL,  
    [RowUpdatedDateTime] [datetime] NOT NULL,  
    [ETLAuditID] [int] NOT NULL  
)
```

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

DimProduct is a **[answer choice]** slowly changing dimension (SCD).

Type 0
Type 1
Type 2

The ProductKey column is **[answer choice]**.

a surrogate key
a business key
an audit column

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Type 2
A Type 2 SCD supports versioning of dimension members. Often the source system doesn't store versions, so the data warehouse load process detects and manages changes in a dimension table. In this case, the dimension table must use a surrogate key to provide a unique reference to a version of the dimension member. It also includes columns that define the date range validity of the version (for example, StartDate and EndDate) and possibly a flag column (for example, IsCurrent) to easily filter by current dimension members.
Reference:
<https://docs.microsoft.com/en-us/learn/modules/populate-slowly-changing-dimensions-azure-synapse-analytics>

NEW QUESTION 69
- (Exam Topic 3)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this scenario, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You have an Azure Storage account that contains 100 GB of files. The files contain text and numerical values. 75% of the rows contain description data that has an average length of 1.1 MB.
You plan to copy the data from the storage account to an Azure SQL data warehouse. You need to prepare the files to ensure that the data copies quickly.
Solution: You modify the files to ensure that each row is less than 1 MB. Does this meet the goal?

- A. Yes
- B. No

Answer: A

Explanation:

When exporting data into an ORC File Format, you might get Java out-of-memory errors when there are large text columns. To work around this limitation, export only a subset of the columns.
References:
<https://docs.microsoft.com/en-us/azure/sql-data-warehouse/guidance-for-loading-data>

NEW QUESTION 71

- (Exam Topic 3)

You are planning a streaming data solution that will use Azure Databricks. The solution will stream sales transaction data from an online store. The solution has the following specifications:

* The output data will contain items purchased, quantity, line total sales amount, and line total tax amount.

* Line total sales amount and line total tax amount will be aggregated in Databricks.

* Sales transactions will never be updated. Instead, new rows will be added to adjust a sale.

You need to recommend an output mode for the dataset that will be processed by using Structured Streaming. The solution must minimize duplicate data.

What should you recommend?

- A. Append
- B. Update
- C. Complete

Answer: C

NEW QUESTION 76

- (Exam Topic 3)

You need to output files from Azure Data Factory.

Which file format should you use for each type of output? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Columnar format:

	▼
Avro	
GZip	
Parquet	
TXT	

JSON with a timestamp:

	▼
Avro	
GZip	
Parquet	
TXT	

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Parquet

Parquet stores data in columns, while Avro stores data in a row-based format. By their very nature, column-oriented data stores are optimized for read-heavy analytical workloads, while row-based databases are best for write-heavy transactional workloads.

Box 2: Avro

An Avro schema is created using JSON format.

AVRO supports timestamps.

Note: Azure Data Factory supports the following file formats (not GZip or TXT).

- > Avro format
- > Binary format
- > Delimited text format
- > Excel format
- > JSON format
- > ORC format
- > Parquet format
- > XML format

Reference:

<https://www.datanami.com/2018/05/16/big-data-file-formats-demystified>

NEW QUESTION 78

- (Exam Topic 3)

You have the following table named Employees.

first name	last name	hire date	employee type
Jane	Doe	2019-08-23	new
Ben	Smith	2017-12-15	Standard

You need to calculate the employee _type value based on the hire date value.

How should you complete the Transact-SQL statement? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content

NOTE: Each correct selection is worth one point.

Values

CASE
ELSE
OVER
PARTITION
ROW_NUMBER

Answer Area

```
SELECT
*,
    Value
    WHEN hire_date >= '2019-01-01' THEN
    'New' Value 'Standard'
    END AS employee_type
FROM
employees;
```

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Values

CASE
ELSE
OVER
PARTITION
ROW_NUMBER

Answer Area

```
SELECT
*,
CASE
    WHEN hire_date >= '2019-01-01' THEN
    'New' PARTITION 'Standard'
    END AS employee_type
FROM
employees;
```

NEW QUESTION 81

- (Exam Topic 3)

You have two Azure Data Factory instances named ADFdev and ADFprod. ADFdev connects to an Azure DevOps Git repository.

You publish changes from the main branch of the Git repository to ADFdev. You need to deploy the artifacts from ADFdev to ADFprod.

What should you do first?

- A. From ADFdev, modify the Git configuration.
B. From ADFdev, create a linked service.
C. From Azure DevOps, create a release pipeline.
D. From Azure DevOps, update the main branch.

Answer: C

Explanation:

In Azure Data Factory, continuous integration and delivery (CI/CD) means moving Data Factory pipelines from one environment (development, test, production) to another.

Note:

The following is a guide for setting up an Azure Pipelines release that automates the deployment of a data factory to multiple environments.

- In Azure DevOps, open the project that's configured with your data factory.
 - On the left side of the page, select Pipelines, and then select Releases.
 - Select New pipeline, or, if you have existing pipelines, select New and then New release pipeline.
 - In the Stage name box, enter the name of your environment.
 - Select Add artifact, and then select the git repository configured with your development data factory.
- Select the publish branch of the repository for the Default branch. By default, this publish branch is adf_publish.
- Select the Empty job template. Reference:

<https://docs.microsoft.com/en-us/azure/data-factory/continuous-integration-deployment>

NEW QUESTION 82

- (Exam Topic 3)

You are designing a sales transactions table in an Azure Synapse Analytics dedicated SQL pool. The table will contains approximately 60 million rows per month and will be partitioned by month. The table will use a clustered column store index and round-robin distribution. Approximately how many rows will there be for each combination of distribution and partition?

- A. 1 million
- B. 5 million
- C. 20 million
- D. 60 million

Answer: D

Explanation:

<https://docs.microsoft.com/en-us/azure/synapse-analytics/sql-data-warehouse/sql-data-warehouse-tables-partitio>

NEW QUESTION 87

- (Exam Topic 3)

You are implementing Azure Stream Analytics windowing functions.

Which windowing function should you use for each requirement? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Segment the data stream into distinct time segments that repeat but do not overlap:	<div>Hopping Sliding Tumbling</div>
Segment the data stream into distinct time segments that repeat and can overlap:	<div>Hopping Sliding Tumbling</div>
Segment the data stream to produce an output only when an event occurs:	<div>Hopping Sliding Tumbling</div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

Segment the data stream into distinct time segments that repeat but do not overlap:	<div>Hopping <u>Sliding</u> Tumbling</div>
Segment the data stream into distinct time segments that repeat and can overlap:	<div>Hopping <u>Sliding</u> Tumbling</div>
Segment the data stream to produce an output only when an event occurs:	<div>Hopping <u>Sliding</u> Tumbling</div>

NEW QUESTION 91

- (Exam Topic 3)

You create an Azure Databricks cluster and specify an additional library to install. When you attempt to load the library to a notebook, the library is not found. You need to identify the cause of the issue. What should you review?

- A. notebook logs
- B. cluster event logs
- C. global init scripts logs
- D. workspace logs

Answer: C

Explanation:

Cluster-scoped Init Scripts: Init scripts are shell scripts that run during the startup of each cluster node before the Spark driver or worker JVM starts. Databricks customers use init scripts for various purposes such as installing custom libraries, launching background processes, or applying enterprise security policies. Logs for Cluster-scoped init scripts are now more consistent with Cluster Log Delivery and can be found in the same root folder as driver and executor logs for the cluster.

Reference:

<https://databricks.com/blog/2018/08/30/introducing-cluster-scoped-init-scripts.html>

NEW QUESTION 92

- (Exam Topic 3)

You have an Azure Stream Analytics query. The query returns a result set that contains 10,000 distinct values for a column named clusterID.

You monitor the Stream Analytics job and discover high latency. You need to reduce the latency.

Which two actions should you perform? Each correct answer presents a complete solution. NOTE: Each correct selection is worth one point.

- A. Add a pass-through query.
- B. Add a temporal analytic function.
- C. Scale out the query by using PARTITION BY.
- D. Convert the query to a reference query.
- E. Increase the number of streaming units.

Answer: CE

Explanation:

C: Scaling a Stream Analytics job takes advantage of partitions in the input or output. Partitioning lets you divide data into subsets based on a partition key. A process that consumes the data (such as a Streaming Analytics job) can consume and write different partitions in parallel, which increases throughput.

E: Streaming Units (SUs) represents the computing resources that are allocated to execute a Stream Analytics job. The higher the number of SUs, the more CPU and memory resources are allocated for your job. This capacity lets you focus on the query logic and abstracts the need to manage the hardware to run your Stream Analytics job in a timely manner.

References:

<https://docs.microsoft.com/en-us/azure/stream-analytics/stream-analytics-parallelization> <https://docs.microsoft.com/en-us/azure/stream-analytics/stream-analytics-streaming-unit-consumption>

NEW QUESTION 95

- (Exam Topic 3)

You have an Azure Active Directory (Azure AD) tenant that contains a security group named Group1. You have an Azure Synapse Analytics dedicated SQL pool named dw1 that contains a schema named schema1.

You need to grant Group1 read-only permissions to all the tables and views in schema1. The solution must use the principle of least privilege.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

NOTE: More than one order of answer choices is correct. You will receive credit for any of the correct orders you select.

Actions

Answer Area

Create a database role named Role1 and grant Role1 SELECT permissions to schema1.

Create a database role named Role1 and grant Role1 SELECT permissions to dw1.

Assign the Azure role-based access control (Azure RBAC) Reader role for dw1 to Group1.

Create a database user in dw1 that represents Group1 and uses the FROM EXTERNAL PROVIDER clause.

Assign Role1 to the Group1 database user.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Step 1: Create a database role named Role1 and grant Role1 SELECT permissions to schema You need to grant Group1 read-only permissions to all the tables and views in schema1.

Place one or more database users into a database role and then assign permissions to the database role. Step 2: Assign Rol1 to the Group database user

Step 3: Assign the Azure role-based access control (Azure RBAC) Reader role for dw1 to Group1 Reference:

<https://docs.microsoft.com/en-us/azure/data-share/how-to-share-from-sql>

NEW QUESTION 99

- (Exam Topic 3)

You need to create a partitioned table in an Azure Synapse Analytics dedicated SQL pool.

How should you complete the Transact-SQL statement? To answer, drag the appropriate values to the correct targets. Each value may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Values

CLUSTERED INDEX
COLLATE
DISTRIBUTION
PARTITION
PARTITION FUNCTION
PARTITION SCHEME

Answer Area

```
CREATE TABLE table1
(
    ID INTEGER,
    col1 VARCHAR(10),
    col2 VARCHAR(10)
) WITH
(
    [ ] = HASH(ID),
    [ ] (ID RANGE LEFT FOR VALUES (1, 1000000, 2000000))
);
```

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Box 1: DISTRIBUTION

Table distribution options include DISTRIBUTION = HASH (distribution_column_name), assigns each row to one distribution by hashing the value stored in distribution_column_name. Box 2: PARTITION

Table partition options. Syntax:

PARTITION (partition_column_name RANGE [LEFT | RIGHT] FOR VALUES ([boundary_value [,...n]]))

Reference:

<https://docs.microsoft.com/en-us/sql/t-sql/statements/create-table-azure-sql-data-warehouse?>

NEW QUESTION 104

- (Exam Topic 3)

You develop data engineering solutions for a company.

A project requires the deployment of data to Azure Data Lake Storage.

You need to implement role-based access control (RBAC) so that project members can manage the Azure Data Lake Storage resources.

Which three actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. Assign Azure AD security groups to Azure Data Lake Storage.
B. Configure end-user authentication for the Azure Data Lake Storage account.
C. Configure service-to-service authentication for the Azure Data Lake Storage account.
D. Create security groups in Azure Active Directory (Azure AD) and add project members.
E. Configure access control lists (ACL) for the Azure Data Lake Storage account.

Answer: ADE

Explanation:

References:

<https://docs.microsoft.com/en-us/azure/data-lake-store/data-lake-store-secure-data>

NEW QUESTION 105

- (Exam Topic 3)

You have an enterprise data warehouse in Azure Synapse Analytics named DW1 on a server named Server1. You need to verify whether the size of the transaction log file for each distribution of DW1 is smaller than 160 GB.

What should you do?

- A. On the master database, execute a query against the sys.dm_pdw_nodes_os_performance_counters dynamic management view.
B. From Azure Monitor in the Azure portal, execute a query against the logs of DW1.
C. On DW1, execute a query against the sys.database_files dynamic management view.
D. Execute a query against the logs of DW1 by using the Get-AzOperationalInsightSearchResult PowerShell cmdlet.

Answer: A

Explanation:

The following query returns the transaction log size on each distribution. If one of the log files is reaching 160 GB, you should consider scaling up your instance or limiting your transaction size.

-- Transaction log size SELECT

instance_name as distribution_db, cntr_value*1.0/1048576 as log_file_size_used_GB, pdw_node_id

FROM sys.dm_pdw_nodes_os_performance_counters WHERE

instance_name like 'Distribution_%'

AND counter_name = 'Log File(s) Used Size (KB)' References:

<https://docs.microsoft.com/en-us/azure/sql-data-warehouse/sql-data-warehouse-manage-monitor>

NEW QUESTION 106

- (Exam Topic 3)

You have an Azure Data Lake Storage Gen2 container that contains 100 TB of data.

You need to ensure that the data in the container is available for read workloads in a secondary region if an outage occurs in the primary region. The solution must minimize costs.

Which type of data redundancy should you use?

- A. zone-redundant storage (ZRS)
- B. read-access geo-redundant storage (RA-GRS)
- C. locally-redundant storage (LRS)
- D. geo-redundant storage (GRS)

Answer: C

NEW QUESTION 108

- (Exam Topic 3)

You are designing the folder structure for an Azure Data Lake Storage Gen2 container.

Users will query data by using a variety of services including Azure Databricks and Azure Synapse Analytics serverless SQL pools. The data will be secured by subject area. Most queries will include data from the current year or current month.

Which folder structure should you recommend to support fast queries and simplified folder security?

- A. /{SubjectArea}/{DataSource}/{DD}/{MM}/{YYYY}/{FileData}_{YYYY}_{MM}_{DD}.csv
- B. /{DD}/{MM}/{YYYY}/{SubjectArea}/{DataSource}/{FileData}_{YYYY}_{MM}_{DD}.csv
- C. /{YYYY}/{MM}/{DD}/{SubjectArea}/{DataSource}/{FileData}_{YYYY}_{MM}_{DD}.csv
- D. /{SubjectArea}/{DataSource}/{YYYY}/{MM}/{DD}/{FileData}_{YYYY}_{MM}_{DD}.csv

Answer: D

Explanation:

There's an important reason to put the date at the end of the directory structure. If you want to lock down certain regions or subject matters to users/groups, then you can easily do so with the POSIX permissions. Otherwise, if there was a need to restrict a certain security group to viewing just the UK data or certain planes, with the date structure in front a separate permission would be required for numerous directories under every hour directory. Additionally, having the date structure in front would exponentially increase the number of directories as time went on.

Note: In IoT workloads, there can be a great deal of data being landed in the data store that spans across numerous products, devices, organizations, and customers. It's important to pre-plan the directory layout for organization, security, and efficient processing of the data for down-stream consumers. A general template to consider might be the following layout:

{Region}/{SubjectMatter(s)}/{yyyy}/{mm}/{dd}/{hh}/

NEW QUESTION 112

- (Exam Topic 3)

You configure monitoring for a Microsoft Azure SQL Data Warehouse implementation. The implementation uses PolyBase to load data from comma-separated value (CSV) files stored in Azure Data Lake Gen 2 using an external table.

Files with an invalid schema cause errors to occur. You need to monitor for an invalid schema error. For which error should you monitor?

- A. EXTERNAL TABLE access failed due to internal error: 'Java exception raised on call to HdfsBridge_Connect: Error[com.microsoft.polybase.client.KerberosSecureLogin] occurred while accessing external files.'
- B. EXTERNAL TABLE access failed due to internal error: 'Java exception raised on call to HdfsBridge_Connect: Error [No FileSystem for scheme: wasbs] occurred while accessing external file.'
- C. Cannot execute the query "Remote Query" against OLE DB provider "SQLNCLI11": for linked server "(null)", Query aborted- the maximum reject threshold (0 rows) was reached while regarding from an external source: 1 rows rejected out of total 1 rows processed.
- D. EXTERNAL TABLE access failed due to internal error: 'Java exception raised on call to HdfsBridge_Connect: Error [Unable to instantiate LoginClass] occurredwhile accessing external files.'

Answer: C

Explanation:

Customer Scenario:

SQL Server 2016 or SQL DW connected to Azure blob storage. The CREATE EXTERNAL TABLE DDL points to a directory (and not a specific file) and the directory contains files with different schemas.

SSMS Error:

Select query on the external table gives the following error: Msg 7320, Level 16, State 110, Line 14

Cannot execute the query "Remote Query" against OLE DB provider "SQLNCLI11" for linked server "(null)". Query aborted-- the maximum reject threshold (0 rows) was reached while reading from an external source: 1 rows rejected out of total 1 rows processed.

Possible Reason:

The reason this error happens is because each file has different schema. The PolyBase external table DDL when pointed to a directory recursively reads all the files in that directory. When a column or data type mismatch happens, this error could be seen in SSMS.

Possible Solution:

If the data for each table consists of one file, then use the filename in the LOCATION section prepended by the directory of the external files. If there are multiple files per table, put each set of files into different directories in Azure Blob Storage and then you can point LOCATION to the directory instead of a particular file. The latter suggestion is the best practices recommended by SQLCAT even if you have one file per table.

NEW QUESTION 114

- (Exam Topic 3)

You have the following Azure Stream Analytics query.

WITH

```
step1 AS (SELECT *
           FROM input1
           PARTITION BY StateID
           INTO 10),
step1 AS (SELECT *
           FROM input2
           PARTITION BY StateID
           INTO 10)
```

```
SELECT *
INTO output
FROM step1
PARTITION BY StateID
UNION step2
  BY StateID
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Statements	Yes	No
The query joins two streams of partitioned data.	<input type="radio"/>	<input type="radio"/>
The stream scheme key and count must match the output scheme.	<input type="radio"/>	<input type="radio"/>
Providing 60 streaming units will optimize the performance of the query.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: Yes
You can now use a new extension of Azure Stream Analytics SQL to specify the number of partitions of a stream when reshuffling the data. The outcome is a stream that has the same partition scheme. Please see below for an example: WITH step1 AS (SELECT * FROM [input1] PARTITION BY DeviceID INTO 10), step2 AS (SELECT * FROM [input2] PARTITION BY DeviceID INTO 10) SELECT * INTO [output] FROM step1 PARTITION BY DeviceID UNION step2 PARTITION BY DeviceID Note: The new extension of Azure Stream Analytics SQL includes a keyword INTO that allows you to specify the number of partitions for a stream when performing reshuffling using a PARTITION BY statement.
Box 2: Yes
When joining two streams of data explicitly repartitioned, these streams must have the same partition key and partition count.
Box 3: Yes
10 partitions x six SUs = 60 SUs is fine.
Note: Remember, Streaming Unit (SU) count, which is the unit of scale for Azure Stream Analytics, must be adjusted so the number of physical resources available to the job can fit the partitioned flow. In general, six SUs is a good number to assign to each partition. In case there are insufficient resources assigned to the job, the system will only apply the repartition if it benefits the job.
Reference:
<https://azure.microsoft.com/en-in/blog/maximize-throughput-with-repartitioning-in-azure-stream-analytics/>

NEW QUESTION 115

- (Exam Topic 3)
You have an Azure Synapse Analytics job that uses Scala. You need to view the status of the job.
What should you do?

- A. From Azure Monitor, run a Kusto query against the AzureDiagnostics table.
- B. From Azure Monitor, run a Kusto query against the SparkLogging1 Event.CL table.
- C. From Synapse Studio, select the workspac
- D. From Monitor, select Apache Sparks applications.
- E. From Synapse Studio, select the workspac
- F. From Monitor, select SQL requests.

Answer: C

NEW QUESTION 118

- (Exam Topic 3)

You have an Azure event hub named retailhub that has 16 partitions. Transactions are posted to retailhub. Each transaction includes the transaction ID, the individual line items, and the payment details. The transaction ID is used as the partition key.

You are designing an Azure Stream Analytics job to identify potentially fraudulent transactions at a retail store. The job will use retailhub as the input. The job will output the transaction ID, the individual line items, the payment details, a fraud score, and a fraud indicator.

You plan to send the output to an Azure event hub named fraudhub.

You need to ensure that the fraud detection solution is highly scalable and processes transactions as quickly as possible.

How should you structure the output of the Stream Analytics job? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Number of partitions:

▼

1

8

16

32

Partition key:

▼

Fraud indicator

Fraud score

Individual line items

Payment details

Transaction ID

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 16

For Event Hubs you need to set the partition key explicitly.

An embarrassingly parallel job is the most scalable scenario in Azure Stream Analytics. It connects one partition of the input to one instance of the query to one partition of the output.

Box 2: Transaction ID Reference:

<https://docs.microsoft.com/en-us/azure/event-hubs/event-hubs-features#partitions>

NEW QUESTION 122

- (Exam Topic 3)

You have an Azure Data Lake Storage Gen2 container.

Data is ingested into the container, and then transformed by a data integration application. The data is NOT modified after that. Users can read files in the container but cannot modify the files.

You need to design a data archiving solution that meets the following requirements: ➤ New data is accessed frequently and must be available as quickly as possible.

- Data that is older than five years is accessed infrequently but must be available within one second when requested.
- Data that is older than seven years is NOT accessed. After seven years, the data must be persisted at the lowest cost possible.
- Costs must be minimized while maintaining the required availability.

How should you manage the data? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point

Five-year-old data:	<div><div></div><div>▼</div><div>Delete the blob.</div><div>Move to archive storage.</div><div>Move to cool storage.</div><div>Move to hot storage.</div></div>
Seven-year-old data:	<div><div></div><div>▼</div><div>Delete the blob.</div><div>Move to archive storage.</div><div>Move to cool storage.</div><div>Move to hot storage.</div></div>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

:
Box 1: Replicated
Replicated tables are ideal for small star-schema dimension tables, because the fact table is often distributed on a column that is not compatible with the connected dimension tables. If this case applies to your schema, consider changing small dimension tables currently implemented as round-robin to replicated.
Box 2: Replicated
Box 3: Replicated
Box 4: Hash-distributed
For Fact tables use hash-distribution with clustered columnstore index. Performance improves when two hash tables are joined on the same distribution column.
Reference:
<https://azure.microsoft.com/en-us/updates/reduce-data-movement-and-make-your-queries-more-efficient-with-th> <https://azure.microsoft.com/en-us/blog/replicated-tables-now-generally-available-in-azure-sql-data-warehouse/>

NEW QUESTION 126

- (Exam Topic 3)
You have an Azure Synapse Analytics dedicated SQL pool that contains a table named Table1. You have files that are ingested and loaded into an Azure Data Lake Storage Gen2 container named container1.
You plan to insert data from the files into Table1 and azure Data Lake Storage Gen2 container named container1.
You plan to insert data from the files into Table1 and transform the data. Each row of data in the files will produce one row in the serving layer of Table1.
You need to ensure that when the source data files are loaded to container1, the DateTime is stored as an additional column in Table1.
Solution: In an Azure Synapse Analytics pipeline, you use a Get Metadata activity that retrieves the DateTime of the files.
Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 129

- (Exam Topic 3)
You have an Azure Synapse Analytics dedicated SQL pool that contains a table named Contacts. Contacts contains a column named Phone.
You need to ensure that users in a specific role only see the last four digits of a phone number when querying the Phone column.
What should you include in the solution?

- A. a default value
- B. dynamic data masking
- C. row-level security (RLS)
- D. column encryption
- E. table partitions

Answer: C

NEW QUESTION 130

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

DP-203 Practice Exam Features:

- * DP-203 Questions and Answers Updated Frequently
- * DP-203 Practice Questions Verified by Expert Senior Certified Staff
- * DP-203 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * DP-203 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The DP-203 Practice Test Here](#)