



CompTIA

Exam Questions 220-1001

CompTIA A+ Certification Exam: Core 1

NEW QUESTION 1

A systems administrator receives a notification from the RAID controller that the RAID 5 array is degraded. Upon logging into the server, the administrator sees that on local disk 0, physical disk 2 has failed. Which of the following is the BEST course of action to take to resolve the problem?

- A. Schedule system downtime and replace physical disk 2. Wait until the array is rebuilt and confirm in the RAID controller that the system is no longer degraded.
- B. Immediately replace physical disk 2. Wait until the arrays is rebuilt and confirm in the RAID controller that the system is no longer degraded.
- C. Delete logical disk 0 and manually configure a new RAID array only using the known-good working drive
- D. Wait until the array is rebuilt and confirm in the RAID controller that the system is no longer degraded.
- E. In the controller, convert the RAID 5 array to RAID 0 array to avoid system downtim
- F. Wait until the array is rebuilt and confirm in the RAID controller that the system is no longer degraded.

Answer: A

NEW QUESTION 2

A technician was called to check an unexpected clicking noise on a desktop that has become more frequent every time a video editing application is loaded. The system fans have been replaced, but the clicking noise remains. Diagnostics have been run on the video card. Which of the following should me the technician do FIRST?

- A. Replace the hard drive.
- B. Replace the video card.
- C. Do a System Restore.
- D. Perform a full data backup.
- E. Scan the system for viruses.

Answer: D

NEW QUESTION 3

Which of the following channels would commonly be used on an 802.11 wireless network?

- A. 6
- B. 17
- C. 802
- D. 8080

Answer: A

NEW QUESTION 4

A user sets up cable modem at home and connects the modem to the ISP at the cable company. Which of the following network types does this connection describe?

- A. WAN
- B. LAN
- C. PAN
- D. MAN

Answer: A

NEW QUESTION 5

The graphics has an issue with printing certain files. The printer does not print the complete image on larger files. A technician verifies the network speed of the printer is set to 1GB and that regular text files print without issue. Which of the following is the MOST likely cause of this problem?

- A. The printer needs more RAM
- B. The print server is timing out
- C. The users are not printing in post-script mode
- D. The printer network connection is set to half duplex

Answer: A


NEW QUESTION 6

The network administrator has changed the IP address of ComputerA from 192.168.1.20 to 10.10.10.20 and now Jane, a user, is unable to connect to file shares on ComputerA from ComputerB using the computer name.

INSTRUCTIONS

Using the available tools, resolve the connectivity issues. After troubleshooting the issue, verify a successful connection.

If at any time you would like to bring back the initial state of the simulation? please click the Reset All button.

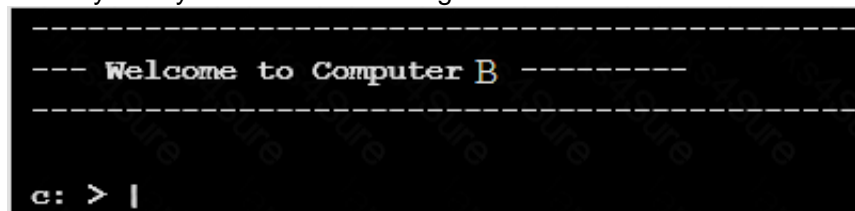


- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Need to flush the DNS cache on Computer B:

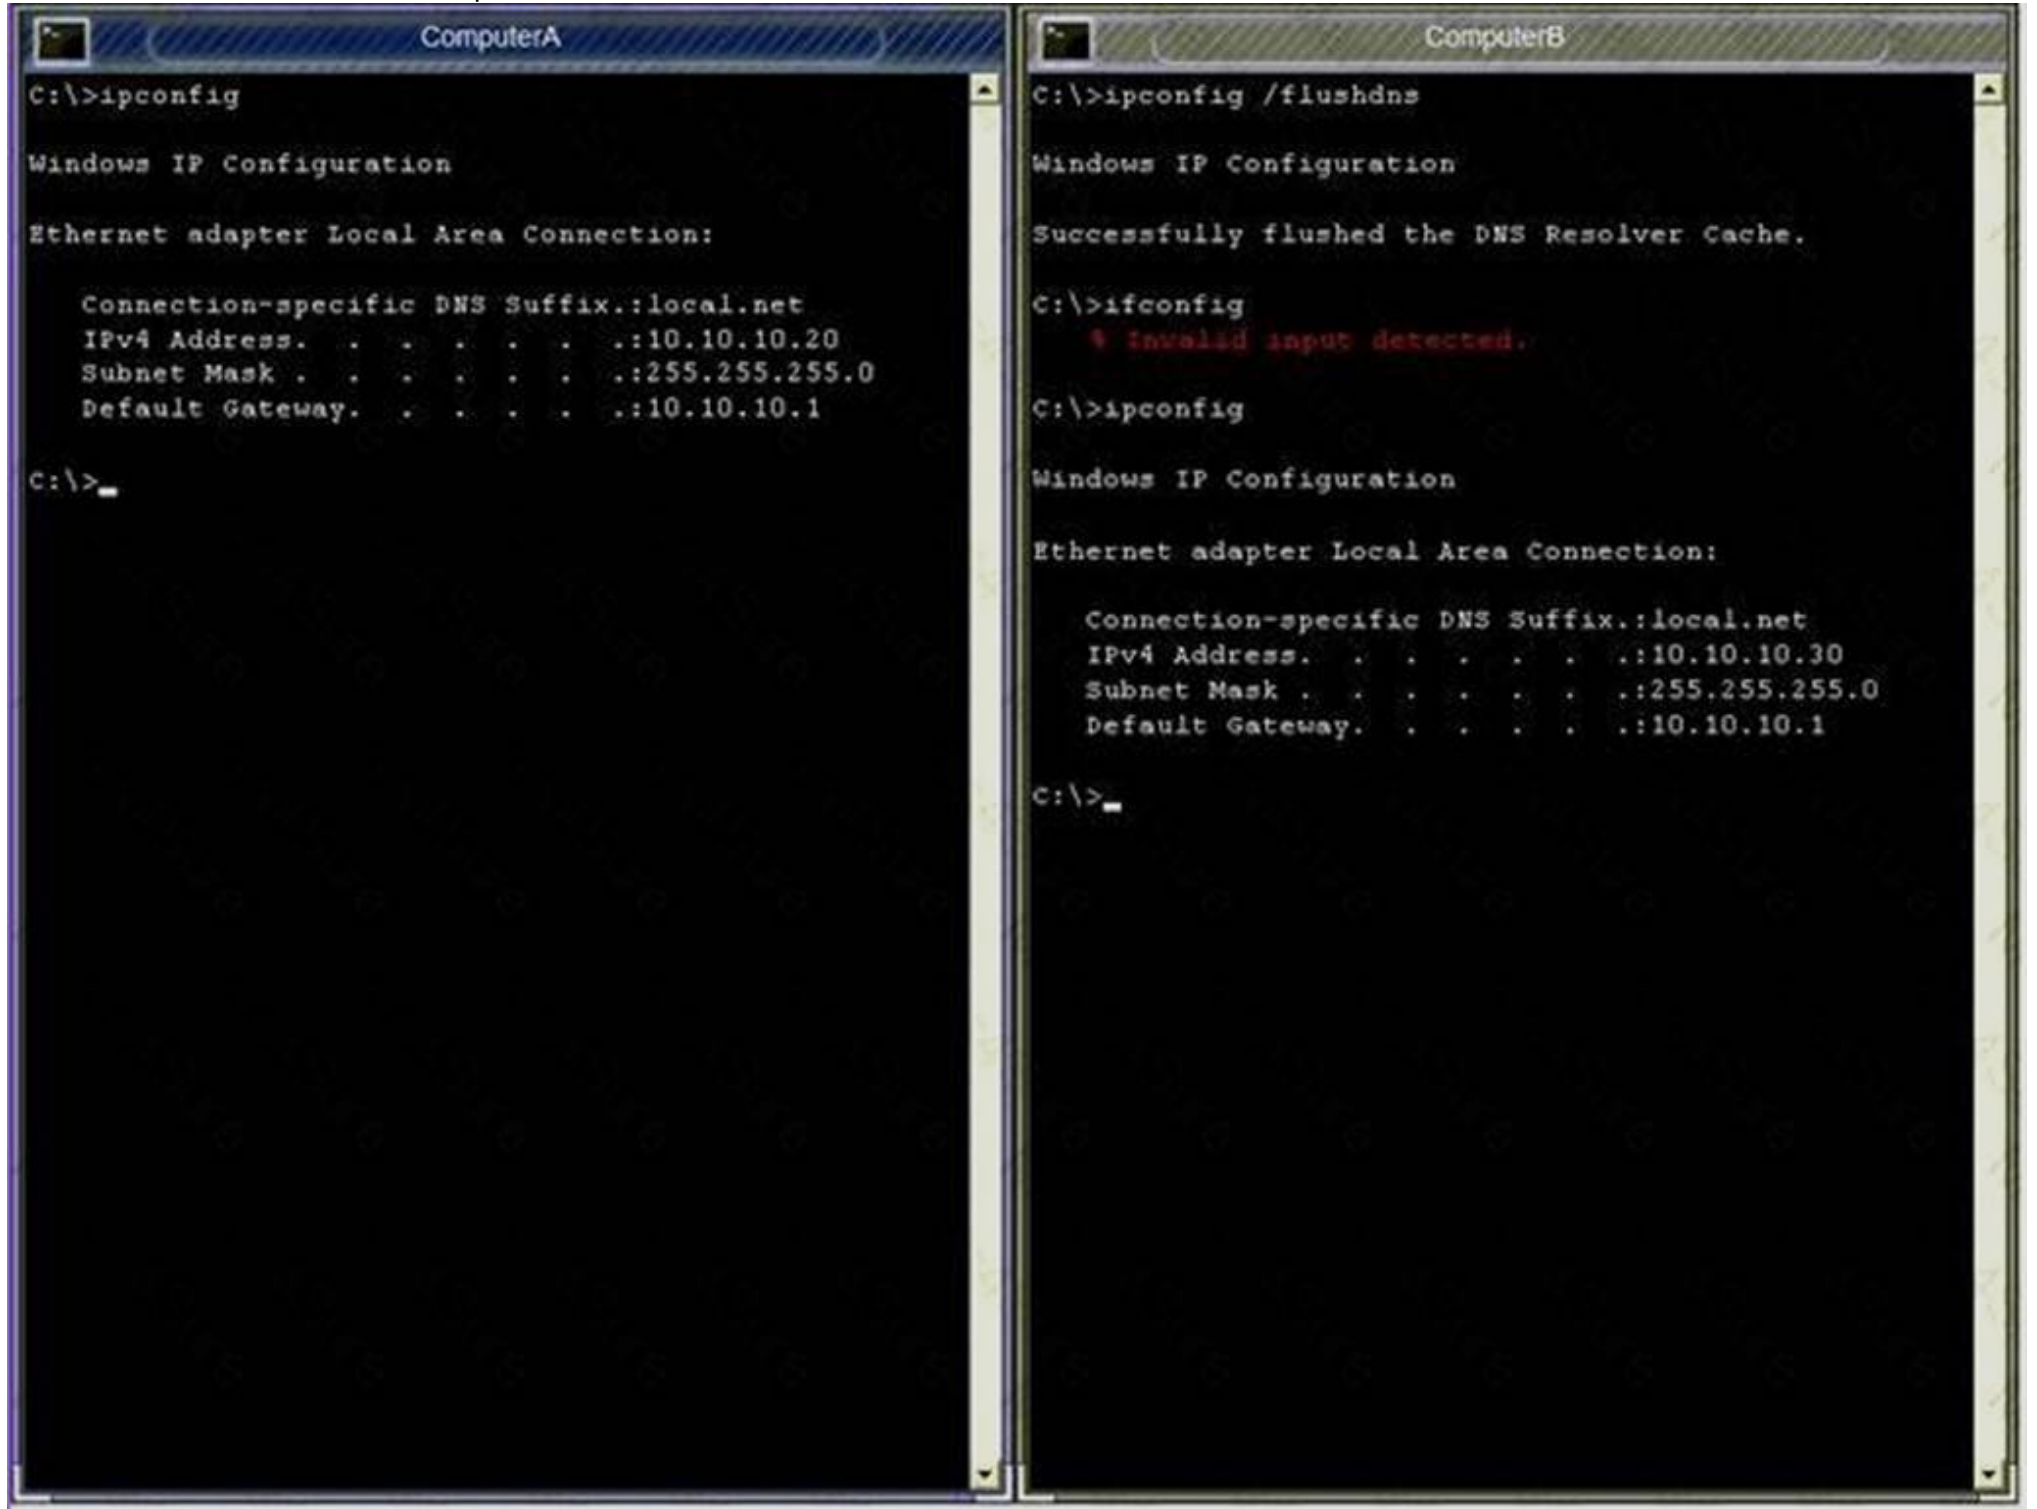

The image shows two side-by-side Windows command prompt windows. The left window, titled 'ComputerA', shows the output of the 'ipconfig' command, displaying IP configuration for 'Ethernet adapter Local Area Connection' with IPv4 address 10.10.10.20, subnet mask 255.255.255.0, and default gateway 10.10.10.1. The right window, titled 'ComputerB', shows the output of 'ipconfig /flushdns' (successfully flushing the DNS Resolver Cache), followed by 'ifconfig' (showing an invalid input detected), and then 'ipconfig' again, displaying IP configuration for 'Ethernet adapter Local Area Connection' with IPv4 address 10.10.10.30, subnet mask 255.255.255.0, and default gateway 10.10.10.1.

Type in ipconfig/flushdns

NEW QUESTION 7

A technician wants to set up a virtual machine in a public cloud environment. Which of the following cloud models should the technician use?

- A. IaaS
- B. SaaS
- C. PaaS
- D. DBaaS

Answer: A

NEW QUESTION 8

Which of the following connector types is used to terminate household telephone cabling?

- A. RG-6
- B. RJ-11
- C. RJ-45
- D. RG-59

Answer: B

NEW QUESTION 9

Which of the following cable types should be used to connect a cable modem to a SOHO router?

- A. Thunderbolt
- B. Coaxial
- C. USB
- D. Ethernet

Answer: D

NEW QUESTION 10

A user reports a laserjet printer is not printing properly. A technician prints a test page and notices the toner is smeared on the page. The technician confirms the toner cartridge is installed correctly and the paper in the tray is the right size. Which of the following printer components is the MOST likely cause of the problem?

- A. Fuser
- B. Roller
- C. Memory
- D. Toner

Answer: A

NEW QUESTION 10

Some users are unable to access the Internet from their workstations. A technician runs the ipconfig command on one of the workstations and sees the following:

```
IPv4 address 192.168.1.27
Subnet mask 255.255.255.0
Default gateway 192.168.1.1
```

The technician pings 8.8.8.8 and gets no response. Next, the technician pings 192.168.1.1 and gets no response. The technician is able to successfully ping an adjacent workstation but cannot ping the print server on the floor below. Which of the following is the MOST likely cause of the Internet connectivity issue in the office?

- A. There is a problem with a router in the office
- B. There is a problem with a DNS server in the office
- C. The users are not getting correct IP addresses from the DHCP server
- D. The wireless access point in the area is down

Answer: A

NEW QUESTION 15

Which of the following peripheral types is MOST likely to be used to input actions into a PC?

- A. Webcam
- B. Mouse
- C. Monitor
- D. Optical drive

Answer: B

NEW QUESTION 18

Several computers are having network connectivity issues. Two of the computers are wired and are not having any issues. The technician verifies that none of the computers having issues have been assigned a static IP.

Which of the following should the technician check NEXT?

- A. Check the closest AP for the area.
- B. Check each wireless adapter switch
- C. Check the group's network switch.
- D. Check the DHCP server.

Answer: D

NEW QUESTION 21

A customer's laptop display has suddenly become very dim. The image of the display can only be seen with a bright, external light, as adjusting the brightness/contracts controls does not cause much change.

Which of the following components MOST likely needs to be replaced?

- A. LCD panel
- B. Inverter
- C. Video card
- D. Digitizer

Answer: B

NEW QUESTION 23

A customer recently moved a high-end graphics card from a known-working computer to a different computer. The computer works without issue when viewing email and web pages or when using certain applications. However, when a game with high-end graphics requirements is opened, the program will run for a few minutes before the computer shuts down. Which of the following is MOST likely causing the problem?

- A. Power supply wattage
- B. Video RAM
- C. CPU frequency
- D. Monitor resolution

Answer: A

NEW QUESTION 26

A technician wants to block remote logins to a server. Which of the following ports should be blocked?

- A. 21
- B. 23
- C. 80
- D. 443

Answer: B

NEW QUESTION 29

A user is having a problem with printing a specific document type.

The network printer OCP shows that the printer is online with no errors. Other users are not having the same issue. The user sends the document to another printer and the document prints.

Which of the following should a technician do FIRST in troubleshooting the problem?

- A. Stop and restart the PC print spooler service.
- B. Verify the user is sending the document to the correct printer queue.
- C. Have each user send the same document to the correct printer queue.
- D. Stop and restart the print server queues, and then have the user resend the document.

Answer: B

NEW QUESTION 33

You need to configure your mobile device to send and receive electronic messages from your company. You must use the company's WLAN as all e-mail services are on default non-secure ports.


The company's WLAN is broadcasting across the company for easier access. Both incoming and outgoing servers require login credentials.

Use the following parameters:

- Email address tech@techies.com
 - Password P@SSwOrd
 - Pop techies.com Port 110 Security: None
 - IMAP techies.com Port 993 Security SSL
 - smtp.techies.com Port 465 Security: TLS
 - Company SSID Techies
 - Security WPA2
 - Passphrase P@SSwOrd
 - SSID is not broadcasted
- INSTRUCTIONS:**

Update the mobile device's parameters to fit the criteria.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.


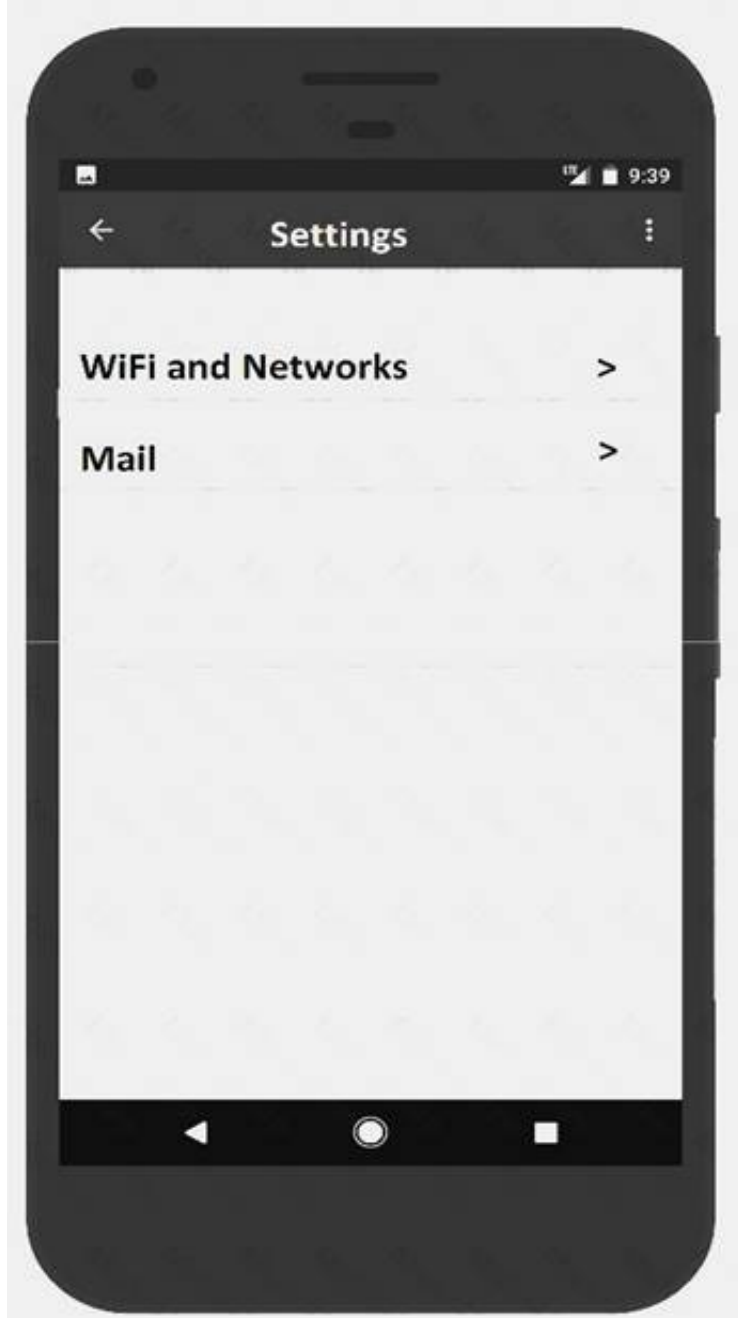


- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

See explanation below

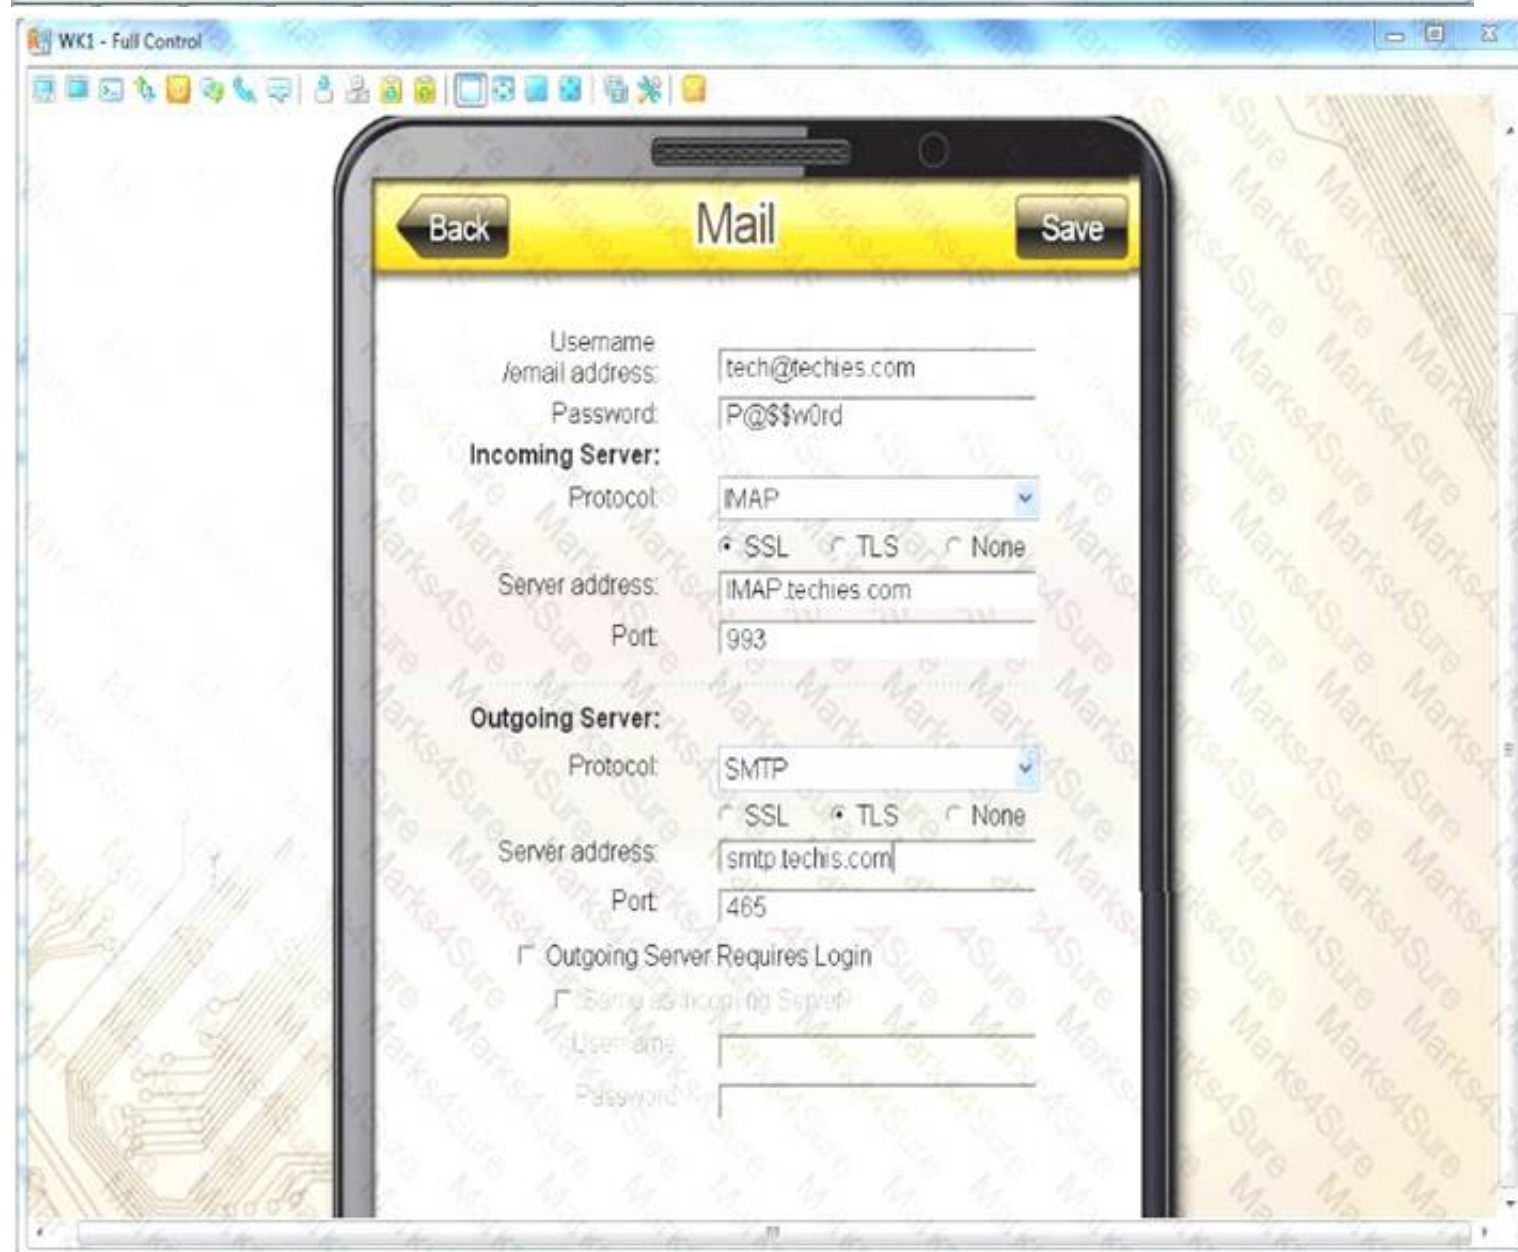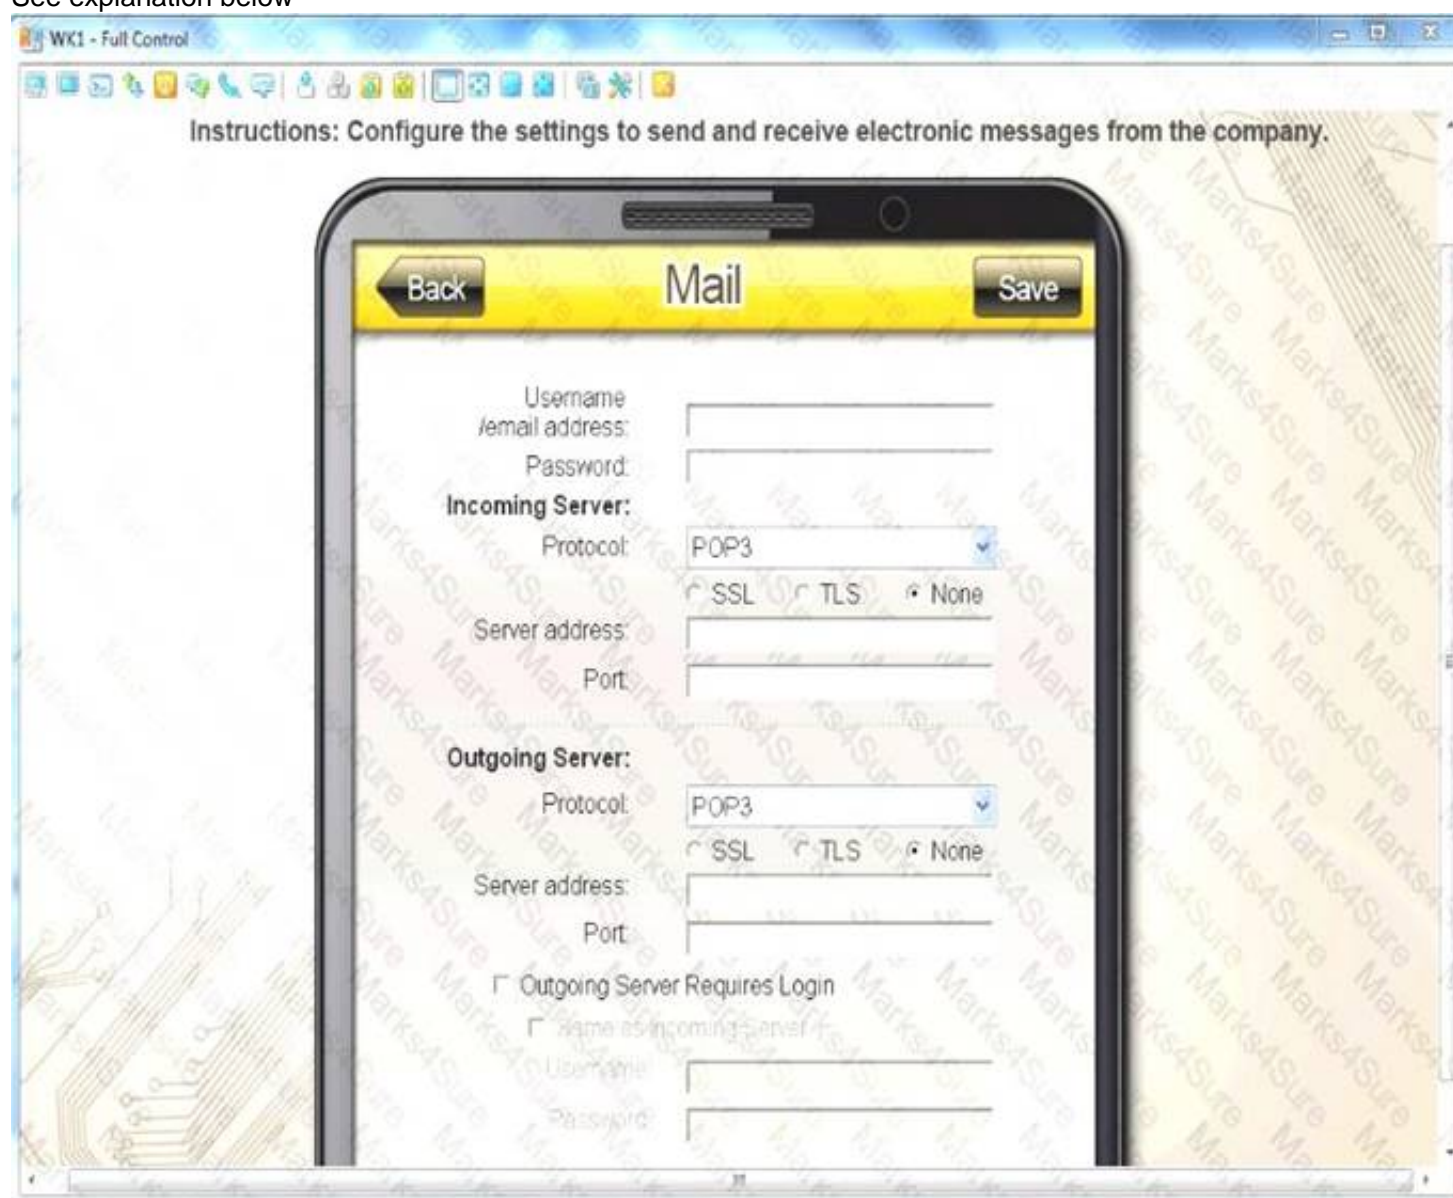

NEW QUESTION 38

A technician wants the number of virtual machines hosting a web application in the public cloud environment to scale based on real-time traffic on the website. Which of the following should the technician configure?

- A. Resource pooling
- B. Rapid elasticity
- C. Measured service

D. High availability

Answer: B

NEW QUESTION 43

A technician receives a cellular from a manager. The technician is instructed to download a service manual directly from the Internet to a laptop. However, there is no WiFi signal or wired Ethernet. Which of the following would be the MOST appropriate connections for the technician to use?

- A. Hotspot
- B. NFC
- C. Bluetooth
- D. VPN

Answer: A

NEW QUESTION 45

A user wants to print a large job on both the front and back sides of the paper. Which of the following settings should the technician advise the user to change in the printer settings?

- A. Collate
- B. Orientation
- C. Duplex
- D. Transparency

Answer: C

NEW QUESTION 47

Which of the following would provide power to an access point?

- A. POE injector
- B. Switch
- C. Repeater
- D. Modern

Answer: A

NEW QUESTION 48

Which of the following connects a PC to its default gateway?

- A. NIC
- B. Switch
- C. Router
- D. Cable modem

Answer: B

NEW QUESTION 49

A technician is configuring a high-performance workstation. The technician needs to choose storage for the boot drive with the highest performance possible. Which of the following drive types BEST meets this requirement?

- A. MicroSD
- B. 15K rpm
- C. NVMe
- D. USB flash

Answer: C

NEW QUESTION 50

Which of the following BEST describes the purpose of an IPv4 subnet mask?

- A. It defines where network and host bits exist
- B. It is used to find the default gateway on a LAN
- C. It gives users the ability to send and receive data.
- D. It allows the ability, when needed, to bridge subnets.

Answer: A

NEW QUESTION 51

Which of the following Ethernet cables would BEST support an application that requires a 600 Mbps throughput at the lowest price point?

- A. Cat 3
- B. Cat 5
- C. Cat 5e
- D. Cat 6

Answer: C

NEW QUESTION 52

Which of the following networking protocols would be BEST track packages through a sorting facility?

- A. RFID
- B. NFC
- C. Bluetooth
- D. Zigbee

Answer: D

NEW QUESTION 53

Which of the following ports are used for secure sessions? (Select two.)

- A. 22
- B. 23
- C. 25
- D. 80
- E. 110
- F. 443

Answer: AF

NEW QUESTION 54

An end user is unable to connect to the network, and a technician has visually verified the lights on the back of the PC are active and there is no physical damage to the Ethernet jack. Which of the following tools should the technician use to continue troubleshooting the connection?

- A. Punchdown tool
- B. Tone generator and probe
- C. Cable tester
- D. Crimper

Answer: C

NEW QUESTION 56

Which of the following is the main purpose of the +5VSB output of a power supply?

- A. It allows peripherals to draw power when the machine is off
- B. It provides power to the audio and sound boards of the machine
- C. It acts as the main voltage supply to the motherboard and processor
- D. It powers all expansion cards and external device hubs

Answer: A

NEW QUESTION 59

A technician is dispatched to troubleshoot a slow performance issue on a PC. Upon arrival, the technician immediately opens Task Manager and sees that CPU and RAM performance are within normal ranges. The technician then checks and verifies the speed and duplex settings and performance on the network card. The technician then temporarily disables the antivirus to see if performance is affected, and it is not. After re-enabling the antivirus, which of the following is the NEXT best stop for the technician to take?

- A. Check to see if insufficient hard drive space is causing the issue
- B. Update the operating system, drivers, and firmware on the PC
- C. Log into the PC with another user profile and test performance
- D. Shut down the PC, unplug the power for 30 seconds, and then boot the PC

Answer: A

NEW QUESTION 62

The IT department recently upgrade client computer for the graphics department. A user reports the new computer has not worked since up. It , makes unusual sound when pressing the power button.

A technician verifies the power cable works and the computer is connected properly to both data and power. The monitor powers on but display the message NO source. Which of the following BEST explains the cause of this problem?

- A. There is insufficient power to the computer
- B. There is back screen on system boot.
- C. The computer is overheating.
- D. The error beep codes on POST.

Answer: C

NEW QUESTION 63

During an inspection, it was found that data racks were not properly grounded. To pass the inspection and address a growing concern to protect data cabling and equipment, a technician must make sure all racks are properly grounded.

Which of the following tools should the technician use to verify this has been completed?

- A. Multimeter
- B. Cable tester
- C. Tone generator
- D. Voltmeter

Answer: A

NEW QUESTION 65

A customer's workstation will not boot. A technician runs diagnostics on the system and discovers it is set up in a RAID 0 configuration, and a single SATA hard drive failed. The system was set up for Performance. Once repaired, the customer requests redundancy be built into the system and an increase in performance. Which of the following describes how the technician should set up the new RAID configuration?

- A. RAID 1 configuration that will utilize new SSD.
- B. RAID 2 configuration that will allow the loss of a hard drive without failure.
- C. RAID 6 configuration that will allow the loss of two hard drives without failure.
- D. RAID 10 configuration utilizing HDD

Answer: D

NEW QUESTION 66

An end user reports a printer error that states "Replace filament". With which of the following types of printer is the end user MOST likely having problems?

- A. ink jet
- B. Laser
- C. 3-D
- D. Thermal

Answer: C

NEW QUESTION 68

A user accidentally spills liquid on a laptop. The user wants the device to be fixed and would like to know how much it will cost. Which of the following steps should the technician take NEXT to verify if the device is repairable before committing to a price? (Choose two.)

- A. Remove the case and organize the parts.
- B. Document the screw locations.
- C. Search the Internet for repair tutorials.
- D. Consult colleagues for advice.
- E. Place the device in rice for a few days.

Answer: AB

NEW QUESTION 69

A technician is replacing an older video card with a new high-end video card in a workstation. The installation was successful, the new card seated properly, and power is connected. However, upon booting, the computer now emits several beeps and will not boot, but shows no error messages. Which of the following is MOST likely the cause of this issue?

- A. The BIOS is out-of-date
- B. There is not enough PSU output
- C. There is an onboard RAM mismatch
- D. GPU is overlocked
- E. The firmware is out-of-date

Answer: B

NEW QUESTION 70

Following a recent malware infection, a user is unable to access network shares from the local server. A technician verifies the device is able to connect to the Internet and the hosted email provider off-site. The technician also confirms the local server is online. Additionally, a malware scanner reports the user's computer is clean. Which of the following is the best NEXT step to troubleshoot the issue?

- A. Verify the DNS servers are configured properly on the device.
- B. Assign a static IP address on the wired network connection
- C. Run a speed test on the network to check for slow transfer speeds
- D. Confirm the network connection is not using a link-local address
- E. Replace the Ethernet cable as it is causing limited connectivity

Answer: C

NEW QUESTION 75

A user printed several documents to a shared network copier and noticed that they have very faint color density. A technician investigates the issue and verifies that the printer had a maintenance kit installed recently. Which of the following next steps will MOST likely resolve the issue? (Select two.)

- A. Replace the toner cartridges
- B. Replace the fuser module
- C. Clean the paper tray rollers
- D. Adjust the printer settings
- E. Replace the developer
- F. Empty the waste toner bottles

Answer: AC

NEW QUESTION 79

An administrator is configuring a virtualization workstation that will host several mission-critical VMs for the human resources department. The workstation will be required to support multiple users at once, and large amounts of data will be accessed daily. Which of the following components will BEST meet these requirements? (Select THREE).

- A. Quad-core CPU
- B. Solid-state drives
- C. Additional RAM
- D. Redundant PSUs
- E. RAID 0 array
- F. High-end GPU
- G. RAID 6 array

Answer: ACG

NEW QUESTION 83

A business owner wants to provide security to laptop users with the ability to charge their devices, access corporate LAN resources, and allow for a variety of their removable hardware.

Which of the following devices would BEST meet the owner's needs?

- A. Docking station
- B. Port replicator
- C. Thunderbolt
- D. USB hub

Answer: A

NEW QUESTION 88

Which of the following devices can utilize VLANs to secure networks?

- A. Switch
- B. Hub
- C. Repeater
- D. Bridge

Answer: A

NEW QUESTION 93

A user receives the following error message when powering on a computer:

Hard drive cannot be found.

A technician restarts the computer, and it boots the OS normally. Several days later, the user reports another problem, but rebooting the computer does not resolve the issue. The technician replaces the motherboard, keeping the same CPU, battery, RAM, and hard drive. The user cannot authenticate at the login screen. Which of the following would BEST explain the causes of the problem? (Select TWO)

- A. POST error code beeps indicate RAM failure.
- B. The system time is not set correctly in the BIOS.
- C. The voltage on the coin cell is drained completely.
- D. UEFI firmware has the Secure Boot setting enabled.
- E. Capacitors on the motherboard are distended.
- F. Incorrect settings are booting the wrong device.
- G. A BSOD error indicates the system is crashing.

Answer: CE

NEW QUESTION 95

A projector's image begins to flicker during a presentation. The laptop display does not produce this issue. When a technician changes the resolution on the laptop, the issue persists. Which of the following is the NEXT step the technician should take?

- A. Check the connectivity of the VGA cable.
- B. Check the connectivity of the power cable.
- C. Change the aspect ratio on the laptop.
- D. Change the settings of the projector.

Answer: A

NEW QUESTION 98

Which of the following server types caches previously visited web pages for faster access in the future?

- A. Proxy server
- B. Web hosting server
- C. DNS server
- D. Branch cache server

Answer: D

NEW QUESTION 99

Which of the following technologies can be used for wireless payments?

- A. NFC
- B. Bluetooth
- C. IR
- D. LTE

Answer: A

NEW QUESTION 102

An ISP has notified a SOHO user of a usage increase on the user's network. The user is concerned the WiFi network is being utilized by unauthorized users. Which of the following would minimize the unauthorized use of the WiFi network?

- A. Implement MAC filtering
- B. Enable NAT
- C. Create a network DMZ
- D. Upgrade the encryption standards

Answer: A

NEW QUESTION 106

A corporation maintains an active social media presence by constantly uploading audio and video. The corporation also regularly hosts video conferences, but attendees are reporting buffering during their telecast.

Which of the following should the IT department do to improve the ability to attend video conferences without interruption?

- A. Enable QoS on network traffic, prioritizing telecast traffic over uploads.
- B. Upgrade video conference room equipment.
- C. Create a VLAN for all employees updating social media.
- D. Adjust the network intrusion device to allow video to flow without filtering.

Answer: A

NEW QUESTION 109

A technician is hired to install network cable in a crawl space running the length of a hallway. To do so without a fire code violation, which of the following types of cable should the technician run?

- A. Plenum
- B. Fiber
- C. Shielded
- D. Coaxial

Answer: A

NEW QUESTION 110

A technician is replacing the LCD panel in a laptop. Which of the following components is MOST likely to be damaged accidentally during the repair?

- A. Bezel
- B. Hinge
- C. Motherboard
- D. Digitizer

Answer: D

NEW QUESTION 112

Joe, a user, sets up an IMAP connection on his smartphone to connect to webmail. Joe is able to view email, but he receives an error message when trying to send a message. When viewing the mail client's configuration, Joe sees a valid SMTP server and port. Which of the following should Joe check NEXT to resolve the issue?

- A. Configure the email account as a POP3 connection
- B. Ensure the SSL/TLS option is being used
- C. Check that the account password is still valid
- D. Make sure the smartphone is not in airplane mode

Answer: A

NEW QUESTION 116

A user has reported application connectivity problems to the network administrator. The network administrator knows there have been firewall configuration changes recently by a security vendor and believes the issue could be related to a port being closed on the firewall. Which of the following should the network administrator do NEXT?

- A. See if the same application fails on another workstation
- B. Go into the firewall and open the port
- C. Verify system functionality on the user's workstation
- D. Document the issue for future reference

Answer:

C

NEW QUESTION 120

A user brings in a smartphone for repair. The device is unable to send/receive calls or connect to WiFi. All applications on the device are working unless they require connectivity.

Which of the following is MOST likely causing the problem?

- A. Airplane mode
- B. Tethering
- C. Disabled hotspot
- D. VPN

Answer: A

NEW QUESTION 124

A technician was asked to virtualize four existing PCs before decommissioning them. The resulting VMs are imported into a new VM workstation running a hypervisor on top of an OS. Three of the VMs are running properly, but the entire system locks up when trying to start the fourth VM. Which of the following should the technician have reviewed prior to creating the VMs to prevent this from occurring? (Select TWO)

- A. Hypervisor requirements
- B. Storage requirements
- C. Resource requirements
- D. Network requirements
- E. Backup requirements
- F. Security requirements

Answer: AF

NEW QUESTION 126

Which of the following Internet connection types often terminates at a switching center and then requires the use of a different media for the last mile to the customer?

- A. ISDN
- B. DSL
- C. Fiber
- D. Cable

Answer: B

NEW QUESTION 129

A client has three locations within city limits that need to be networked. Vendor network requirements for all three locations are a minimum of 1GB. Which of the following are the types of networks that will MOST likely be used for internal office and office-to-office networking? (Choose two.)

- A. MAN
- B. LAN
- C. WAN
- D. PAN
- E. SAN
- F. WLAN

Answer: AB

NEW QUESTION 133

A workstation was just moved to a new work location without a surge protector. It was working the day before, but now the PC will not power on, the fans will not spin, and there are no signs of activity. Which of the following should the technician do FIRST?

- A. Check the power cable connection
- B. Check the voltage of the PSU with a tester
- C. Test for distended capacitors
- D. Check the voltage switch

Answer: A

NEW QUESTION 137

A company offers several out-of-the-box computer configurations to its clients. A client requests several new computers for its newest location, which will be used by guests to check in upon arrival and fill out contact information. Which of the following configurations would BEST fit this customer's needs?

- A. Touch-screen kiosk
- B. Thick client
- C. CAD workstation
- D. Virtualized host computer

Answer: A

NEW QUESTION 141

A network administrator would like to increase network bandwidth to iGbps between two office buildings that are 0.5mi (805m) apart. Which of the following would

be the BEST solution?

- A. Fiber
- B. Coaxial
- C. Plenum
- D. Cat 6

Answer: A

NEW QUESTION 142

A technician is setting up a WiFi-enabled thermostat for a customer, but the customer is concerned about IoT devices getting hacked. Which of the following BEST address the customer's concerns? (Choose two.)

- A. Use the latest encryption standard on the wireless network and set a strong password.
- B. Enable two-factor authentication for the IoT device's cloud account, if it is available.
- C. Separate the IoT thermostat by segregating it in a DMZ network.
- D. Disable wireless access on the thermostat to make it unshakable.
- E. Upgrade the customer's router to the latest version to improve network security.
- F. Upgrade the customer's wireless network encryption to WPA.

Answer: AC

NEW QUESTION 144

A user purchases a wireless printer and sets it up in an office. The user installs all necessary software for the printer on the computer and connects the printer to the guest wireless network. However, when the user attempts to print to the printer, nothing happens. Which of the following will resolve the issue?

- A. Set up the user's computer to act as a print server.
- B. Configure the printer to use the Internet printing protocol.
- C. Ensure the user's computer is set to DHCP.
- D. Connect the printer to the company wireless network.

Answer: D

NEW QUESTION 146

A technician is setting up a VM for use in testing software deployments. The VM is offline, but the hypervisor is not. Which of the following settings should the technician change to resolve this issue?

- A. Virtual security
- B. Virtual storage
- C. Virtual CPU
- D. Virtual switch
- E. Virtual RAM

Answer: C

NEW QUESTION 150

Company management wants to give users the ability to work from home during periods of bad weather. Which of the following would enable the workforce to do this?

- A. NAT
- B. VLAN
- C. VPN
- D. HIPS

Answer: C

NEW QUESTION 155

A technician would like to install an internal storage drive for a computer. Which of the following cable connectors would MOST likely be used to transfer data? (Select TWO).

- A. USB-C
- B. IDE
- C. SATA
- D. USB-A
- E. Motex
- F. Lightning

Answer: BC

NEW QUESTION 156

A technician needs to call a user's cellular provider to troubleshoot a network speed issue with the user's mobile device. Which of the following technologies is the technician troubleshooting?

- A. Long-term evolution
- B. Near-field communication
- C. Radio frequency ID

D. Z-wave

Answer: A

NEW QUESTION 158

A technician is upgrading the RAM in a server-grade laptop for a company's Chief Executive Officer (CEO). The CEO cannot afford any downtime. Which of the following is the BEST type of memory module to purchase?

- A. LRSIMM
- B. DDR4
- C. Parity
- D. Dual channel

Answer: B

NEW QUESTION 159

A technician is troubleshooting network connectivity issues after a new wireless router was installed in an office. Users who connect to the new router are unable to access LAN resources. Which of the following is the MOST likely cause of the issue?

- A. There are conflicting DHCP servers on the network
- B. There are conflicting ARP records
- C. There are conflicting gateways on the network
- D. There are conflicting IP protocols

Answer: A

NEW QUESTION 162

Virtual machines hosted in the cloud that are used by developers to code applications are an example of:

- A. FaaS
- B. BaaS
- C. PaaS
- D. SaaS
- E. IaaS

Answer: C

NEW QUESTION 164

A user notices a laser printer is picking up multiple sheets of paper from one of its paper trays. The problem started last week and has gotten worse. Which of the following is MOST likely the cause of this problem?

- A. Separation pad
- B. Feed roller
- C. Registration roller
- D. Duplex assembly

Answer: A

NEW QUESTION 166

Which of the following connector types can be plugged into a device both right-side up and upside down?

- A. USB
- B. USB-C
- C. Mini-USB
- D. Micro-USB

Answer: B

NEW QUESTION 171

The corporate office has mandated that all documents must be electronically signed and encrypted with a certificate in order to be stored on the network. The IT department has been asked to ensure the proper file format is used to accomplish this task. Which of the following would satisfy the requirement?

- A. Print to PDF
- B. Print to file
- C. Print to image
- D. Print to XPS

Answer: A

NEW QUESTION 172

Joe, a user, has purchased a new mobile device that uses a different OS than his previous one. Joe wants to copy his contacts and appointments from his corporate account without entering them manually.

Which of the following would be the BEST way for a technician to assist Joe?

- A. Log into the same email provider on the new device, and restore the contacts and dates.

- B. Create a Bluetooth connection between Joe's devices, and copy his contacts and calendar.
- C. Back up the old mobile device to a PC, and import the contacts and schedule from the PC.
- D. Use NFC to transfer all compatible data from one device to the other.

Answer: A

NEW QUESTION 173

An employee's mobile device no longer charges, and the employee believes the battery is bad. A technician tests the mobile device and finds it will charge on a wireless charging pad but not when it is connected to a charging cable. Other devices charge without issue when the cable is used. Which of the following should the technician perform FIRST to resolve the issue?

- A. Clean out the charging port on the device
- B. Replace the mobile device's battery
- C. Issue a new charging cable to the employee
- D. Send the device for service and give the employee a loaner

Answer: A

NEW QUESTION 177

An administrator connects to the company's cloud account and builds a server that is hosted in the cloud. The server will be used as a confidential database server for one of the company's core applications. The administrator is responsible for patching and updating the server OS. Which of the following cloud models is this an example of?

- A. IaaS
- B. SaaS
- C. PaaS
- D. Public

Answer: A

NEW QUESTION 182

A server needs a RAM upgrade, and a technician has been tasked with retrieving the RAM from storage and then installing it. Which of the following is the BEST RAM type for the technician to retrieve?

- A. SoDIMM
- B. DDR4
- C. Single channel
- D. ECC

Answer: B

NEW QUESTION 187

Which of the following cloud computing concepts facilitates automated server deployment?

- A. NaaS
- B. IaaS
- C. PaaS
- D. SaaS

Answer: B

NEW QUESTION 189

Which of the following is designed to function BEST in harsh lighting conditions?

- A. Large tablet
- B. E-reader
- C. Smart watch
- D. Virtual reality headset

Answer: D

NEW QUESTION 190

A technician is replacing a broken screen on a new company laptop but does not have repair information from the vendor. Which of the following is the BEST way to proceed?

- A. Document and label the cable and screw locations.
- B. Replace the screen with a non-OEM.
- C. Update the firmware on the device before repairing it.
- D. Wait for the vendor to provide more information.

Answer: A

NEW QUESTION 193

A user reports being unable to browse the Internet. A technician believes the cause of the issue is related to DNS. Which of the following should the technician perform NEXT?

- A. Test the theory by attempting to browse to a website's known IP address.
- B. Implement preventive measures by manually assigning a DNS server to the PC.
- C. Identify the problem by running the command ipconfig /flushdns.
- D. Document the findings in the organization's local knowledge base.

Answer: A

NEW QUESTION 195

Which of the following peripherals would a company use to take inventory quickly and update price tags for products? (Choose two.)

- A. Barcode scanner
- B. Label printer
- C. Magnetic reader
- D. KVM switch
- E. NFC device
- F. Flatted scanner

Answer: AC

NEW QUESTION 197

A customer is using a cloud storage program that maintains a copy of local file on the cloud storage servers. The WF network is not very fast, and the customer users bandwidth intensive video streaming all day. Which of the following parameters should be adjust to keep the cloud storage program from using too much bandwidth?

- A. Synchronization settings
- B. Wireless settings
- C. Video streaming settings
- D. QoS settings

Answer: D

NEW QUESTION 199

Which of the following features will save the battery life of a laptop significantly if they are disabled? (Choose two.)

- A. Touchpad
- B. Volume
- C. Screen orientation
- D. Cellular
- E. Bluetooth
- F. Fingerprint reader

Answer: DE

NEW QUESTION 200

A customer reports being unable to access email on desktop workstation, however, other office application are working. A technician determines the computer has an IP address of 169.254.1.10. The technician learns from the customer that the computer recently was moved across the room. Which of the following troubleshooting steps should technician take NEXT?

- A. Check the default gateway
- B. Verify physical Ethernet connections
- C. Test web browser functional
- D. Restrict the computer
- E. Resolve the IP address conflict

Answer: E

NEW QUESTION 204

Which of the following is considered a connection-oriented protocol?

- A. UDP
- B. TCP
- C. SSH
- D. HTTP

Answer: B

NEW QUESTION 209

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

220-1001 Practice Exam Features:

- * 220-1001 Questions and Answers Updated Frequently
- * 220-1001 Practice Questions Verified by Expert Senior Certified Staff
- * 220-1001 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 220-1001 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 220-1001 Practice Test Here](#)